



CLEVELAND



Style	Page No.	Style	Page No.	Style	Page No.	Style	Page No.	Style	Page No.
105	100	2133	25-28	4115	333	CEM-CH2	304	HG-2KS	233
0650M	181, 188	2133-TC	25-28	413	333	CEM-CH2D	304	HG-2M	230
0710M	184	2175	16-18	415	333	CEM-CH4	305	HG-3	238
1001	148-151	2175-TA	16-18	421	333	CEM-CH4D	305	HG-4B	243
1001TN	148-150	2175-TC	16-18	426	333	CEM-DE2	285	HG-4C	239-241
1002	148-151	2175-TN	16-18	429	333	CEM-DE2B	286	HGA-2	236
1002	188	2213	56-60	460	333	CEM-DE4	287	HGC-2	250-251
1002L	152	2213	150	4703	108	CEM-DE4B	288	HGC-2B	252
1002SO	148-150	222	184	492	180	CEM-EG2	303	HGC-4B	255
1002TC	148-150	2222	53-55	550	185-186	CEM-EMS-3	279	HGC-4C	253-254
1002TN	148-150	2228	51-52	551	185-186	CEM-EMS-5	280	HGN-2	234
1003	148-151	223	186	552	185-186	CEM-HPDE-5	278	HGN-2B	235
1003TN	148-150	224	184	553	185-186	CEM-RA	284	HMD-2	216
1004	148-151	225	186	554	185	CEM-RS	283	HMD-2B	217
1011	154-156	226	186	610	100	CEM-SE2	291-292	HMD-4	218
1011E	158	2330	19-21	610	182-183	CEM-SE2B	293-294	HMDC-2	246
1011SO	154-155	2331G	22-24	616	109	CEM-SE3	295	HMDC-4	247
1011TC	154-156	240	187	618	109	CEM-SE4	298, 299	HMG-2	219
1011TN	154-156	2410	89-90	620	183	CEM-SE4B	302	HMG-2B	220
1012	158	2411	89-90	642	110	CEM-SEST2	303	HMG-4	221
1053	157	2412	89-90	650	110	CEM-V2-5R	276-277	HPDM-2	237
1091	171	242	187	650	180-181, 188	CEM-V-4B	275	PER-862P	163
1092	171	243	187	655	115	CEM-V-4R	272-274	PER-862SP	162
1093	164	244	187	657	111	CI-1000	153	PER-893SF	169-170
1093-TC	164	2440	91	659	111	CI-1000-TC	153	PER-960SP	162-163
1093-TN	164	245	187	660	181	CMCE-2	289-290	PER-980SF	169-170
1094	164	2510	70-73	710	182-183	CMCE-2AL	289-290	PM-2	261
1094-TC	164	2513	76	850	327	CMCE-4	296-297	PM-3	262
1094-TN	164	2540	77	851	328	CMCE-4AL	296-297	PM-4	263-264
1095	165	2550	74-75	852	329	CMTM2	175	PM-4B	265
1096	165	2565	78-79	853	329	CMTM3	176	PM-4DE	260
1727	68	2565-TN	78-79	855	327	CMTMM2	175	PM-538L	271
1730	101	2575	80-82	856	328	CMTMM3	176	PM-538R	270
1765	29	2575-TA	80-82	857	329	CRE	244-245	PM-539L	267
1766	66	2575-TN	80-82	858	329	CTM	177	PM-539R	266
1767	30	2635	98	860	327	CTMBPP	179	PMRC-C	268
1798	93	2636	97	861	328	CTMBPPC	179	PMRF-C	269
183	116-117	2645	98	879	112	CTMBPT	179	PRO-861SP	160-161
183 Set	117	2646	97	879P	114	CTMBPTC	179	PRO-892SF	167-168
192	326	2727	65	884	113	CTMC	177	PRO-961SP	160-161
192 Set	326	2745	69	902	330	CTMNP	178	PRO-981SF	167-168
2001	38-39	3001	95	903	330	CTMNPC	178	RG6	256
2001G	32-36	305	331	940E	92	HD-2	222-223	RG6-TA	256
2001M	333	307	331	950E	87-88	HD-2B	224	RG6-TC	256
2002	38-39	318	332	964B	173	HD-3	225	RG8	257-258
2002G	32-36, 37	321	331, 333	965B	172	HD-4C	226	RG8-TA	257-258
2002G-TC	32-36	326	332	965TN	172	HDC-2	248	RG8-TC	257-258
2006	50	327	333	966B	173	HDC-4C	249	RG9	259
2011	61	3507	327	967B	174	HG-2	227-229	RG9-TC	259
2012	42-43	3517	328	975	172	HG-2B	231	T-101	159
2020	40-41	3722-12	85-86	975TN	172	HG-2K	232		
2065	44-45	3722-6	85-86	995	96				
2065-TN	44-45	3780	62-64	996	94				
2075	46-49	3780-TC	62-64	998	94				
2075	73	3957-12	83-84	B-101	166				
2075-TA	46-49	3957-6	83-84	10001	99				
2075-TC	46-49	4001	102-105	10003	99				
2075-TN	46-49	4005	107	CEM-AM2	281				
2120	14, 15	4030	106	CEM-AM3	282				

See Threading Section for
more information on:



**FAST
TAP**

Common Special Taps and Special Taps from Blanks



CLEVELAND

Brand of Greenfield Industries

*The name you've
trusted since 1874 for
quality cutting tools.*

Cleveland is a superior cutting tooling brand providing solutions to industry for over 140 years. During their long history, they've earned a reputation for the highest quality tools, outstanding customer service, and expert engineering technical advice.

Whatever your tooling need, whether you're drilling, threading, or milling, contact your Greenfield distributor for the ultimate in product and support solutions.



The  Cleveland tradition continues today at Greenfield Industries.

A History of Excellence



1874

Cleveland Twist Drill established in Cleveland, Ohio.

1912

Greenfield founded.

1995

Greenfield Industries purchases Cleveland Twist Drill.

2009

Greenfield Industries is acquired by TDC.

2010 - 2013

Greenfield Industries moves all offices and operations to Seneca, SC.

2014

TDC establishes Greenfield US and Canadian headquarters, as well as moving TDC overseas headquarters to Seneca, S.C., USA.

The Cleveland® brand is well-known throughout the world for its wide selection of premium cutting tools for drilling, countersinking, reaming, threading, and milling operations.



Its roots go back to the 1870's, when Cleveland Twist Drill was established as a premier cutting tool company in the United States. Cleveland has always been famous for the quality and reliability of its tools, and the company grew

to be one of the largest high-speed steel toolmakers in the US, expanding to overseas markets.

In 1995, Cleveland Twist Drill was acquired by Greenfield Industries Inc. (GFI), a U.S. based manufacturer of precision cutting tools.

Today, Greenfield Industries is part of TDC, the world's largest manufacturer of twist drills.



TDC




TDC Cutting Tools Company is one of the fastest growing cutting tool companies in the world and is the world market leader for high speed steel cutting tools.

Its vertical integration, covering the complete supply chain, from mining ore to smelting steel, to the blank shaft, and final product production, gives TDC a competitive advantage over its competitors in our increasingly volatile economy.

TDC employs around 3000 employees worldwide, produces over 300 million tools and 6000 miles of saw blades annually.

Operations including manufacturing, sales, and distribution have been established across the globe in China, Germany, France, Switzerland, Mexico, Canada, Brazil, Australia and the U.S.

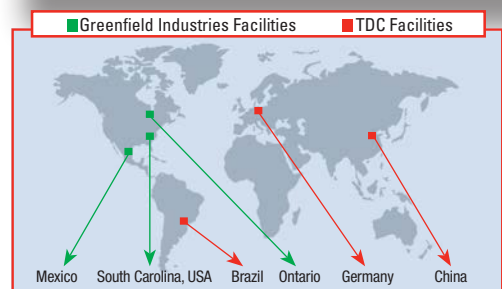

Environmentally-friendly recycling

TDC

World Market Leader for
High Speed Steel Cutting Tools



Integrated Global Manufacturer,
World Leader in Cutting Tools



Pioneer in Recycling Metal,
Making Life Easier and Cleaner

These tools are
then used by the
industries who build
the products that
move America.



GreenTech Global Recycling is a part of Top-Eastern Group and was founded in 2012. They supply large volume, special recycled metals that can be further processed by TDC global operations. GreenTech buys non-ferrous material that is industry specific to TDC from end-users, scrap and metal recyclers (including brokers), and local consumers.



Mine/Mill

1

We are leading
the industry.

360° Manufacturing

Mine/mill, manufacture, and recycle. Allowing us to control and provide a high quality, proprietary product material, while reducing waste and helping the environment.

As part of the TDC Group, we have direct access to the finest raw materials from our own mines.

These materials are then refined and made into the **exclusive raw material** used in manufacturing Greenfield's unparalleled drills, end mills, taps, dies; and other specially manufactured tools.

GreenTech supplies TDC with large volume, special recycled metals that can be further processed by TDC global operations.

Manufacture

2

Recycle

3



Through our recycling
we are all able to make
less impact on the
environment and lower
operating cost.

Call: (864) 643-1030 greentechglobalrecycling.com

Up to **10%** cash
back or credit
memo on market
value.

Whether an industrial facility, manufacturing plant or a local shop, your business will realize the following benefits; raw material/ ore preservation, energy conservation and cost stabilization. Contact us for a quote on your material or for a free evaluation.

Welcome



Seneca, South Carolina manufacturing facility and U.S. headquarters.

Greenfield Industries' U.S. facility includes over 233,000 square feet for sales, engineering, manufacturing, and recycling. Our Cleveland brand is manufactured and shipped from Seneca, SC globally.



We have a unique ability to successfully custom-design products to meet our customers' needs. Our sales and engineering staff is always ready to assist with your tooling requirements.

The uncompromising commitment to quality, along with the hard work of our employees, Cleveland products continue to be a trusted name for over 140 years.



Quality product by quality people.

Knowledgeable and informed sales and engineering staff.

State-of-the-art machinery.


Manufactured in the U.S.A.

Our exclusive raw material developed for our manufacturing allows Greenfield to lead the industry in unparalleled drills, end mills, taps, dies, and other specialty manufactured tools.

telephone 800.348.2885

Page 9

Holemaking



Drills, Reamers, Counterbores

Page 142

Threading



Thread Mills, Taps

Page 210

Milling



End Mills

Page 325

Other Tools



Screw Extractors, Saws, etc.

Our Cleveland brand is manufactured in high speed steel, cobalt, and carbide, as well as other materials, allowing us to provide quality products for a wide range of industries with our variety of tools.



Medical



Aerospace



Energy



Automotive

Metal Cutting Safety

(read this before using Cleveland® products)

Modern metal cutting operations involve high energy, high spindle or cutter speeds, and high temperatures and cutting forces. Hot, flying chips may be projected from the workpiece during metal-cutting. Although advanced cutting tool materials are designed and manufactured to withstand the high cutting forces and temperatures that normally occur in these operations, they are susceptible to fragmenting in service, particularly if they are subjected to over-stress, severe impact or otherwise abused. Therefore, precautions should be taken to adequately protect workers, observers and equipment against hot, flying chips, fragmented cutting tools, broken work pieces or other similar projectiles. Machines should be fully guarded and personal protective equipment should be used at all times.


When grinding advanced cutting tool materials, a suitable means for collection and disposal of dust, mist or sludge should be provided. Overexposure to dust or mist containing metallic particles can be hazardous to health particularly if exposure continues over an extended period of time and may cause eye, skin and mucous membrane irritation and temporary or permanent respiratory disease. Certain existing pulmonary and skin conditions may be aggravated by exposure to dust or mist. Adequate ventilation, respiratory protection and eye protection should be provided when grinding and workers should avoid breathing of and prolonged skin contact with dust or mist.

General Industry Safety and Health Regulations, Part 1910, U.S. Department of Labor, published in Title 29 of the Code of Federal Regulations should be consulted. Obtain from Cleveland® and read the applicable Material Safety Data Sheet before grinding.

Cutting tools are only one part of the worker-machine-tool system. Many variables exist in machining operations, including the metal removal rate; the workpiece size, shape, strength and rigidity; the chucking and fixturing; the load carrying capability of centers; the cutter and spindle speed and torque limitations; the holder and boring bar overhang; the available power; and the condition of the tooling and the machine. A safe metal cutting operation must take all of these variables, and others, into consideration.

Cleveland® has no control over the end use of its products or the environment into which those products are placed. Cleveland® urges that its customers adhere to the recommended standards of use of their metal cutting operations. The information included throughout this catalog under the heading "Technical Data" and other recommendations on machining practices referred to herein are only advisory in nature and do not constitute representations or warranties and are not necessarily appropriate for any particular work environment or application.

Cleveland offers an extensive array of holemaking tools. The Cleveland brand is known for performance tools that run faster, longer, and with more precision than competitive tools. This Holemaking section includes: screw machine length, stub length, jobber length, taper length, AC extension, extra length, taper shank, as well as miscellaneous drills, reamers, and counterbores. We have a large selection of surface treatments, and industry specific application products.

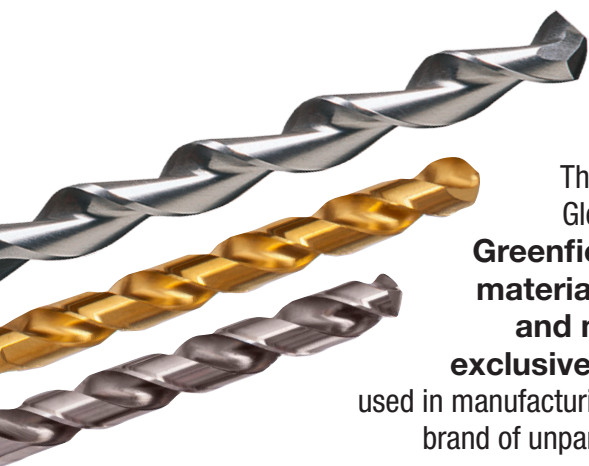


Through GreenTech Global Recycling all **Greenfield Industries materials are refined and made into the exclusive raw material** used in manufacturing the Cleveland brand of unparalleled products.



Split Point versus Traditional Point

The right drill bit can help you work smarter & faster, and even save you money — if you know which features to look for.

If you're drilling by hand, choose a drill with a split point: it drills on contact.




You'll get a faster start and there's no walking. And you're less likely to need a center punch to get started, thanks to the split point's four cutting edges. Those extra edges cause the split point to drill rounder holes faster,

while generating less heat with less force. That means you're working faster and getting more holes per charge with your cordless drill. The split point tool is versatile: it also performs well in presses, CNC machines, and more.

The heavy duty construction of split point drill bits make them a great choice when you work with hard materials like cast iron, stainless steel and alloy steels. Split point bits are available from Greenfield Industries in cobalt and High Speed steel.

You can expect a longer life from Greenfield Industries' heavy duty split point drill, with fewer broken bits.




Holemaking Product Index 10-13

Screw Machine Length Drills	Extra Length Drills
Stub Length Drills	Taper Shank Drills
Jobber Length Drills	Miscellaneous Drills
Taper Length Drills	Reamers
AC Extension Drills	Counterbores

Cost Saving Sets



Complete list of
Holemaking Sets 118-119


**Technical
Information**

Nomenclature	120
High Speed Steel Drills	
Material Class	121
Operating Parameters	122
Surface Treatments	123
Special Drills	123
Cobalt Drills	
Material Class	124
Operating Parameters	125
Drill Cutting Speeds	126
Dimensional Specifications	129
Shank / Tang	135
Morse Taper Shank	135
Reamers	
Custom Reamers	136
Reamer Speeds and Feeds	138
Tolerances / Regrinding	139
Reamer Cutting Speeds	140


TECH TIPS

Benefits of 2133 Cobalt Screw Machine Drill	25
Bright vs. Surface Treated Tools	39
Heavy Duty Automotive	
Tang Taper Length Drills	77
Using Spotting and Centering Drills	96
Point Angle: 90° vs 120°	96
Using Drill Drifts	100
How to Select Correct Reamer Style	101
Aircraft Type Counterbores	113
Clearance or Taper Router	115
Q-Cobalt Advantages	124

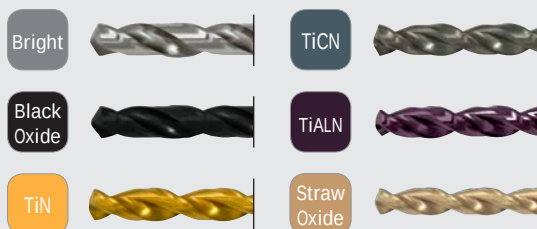Surface Treatment


Additional treatments available upon request.



Screw Machine / Stub Length Drills

Screw Machine / Stub Length Drills					Tool Material				Application					Point				Surface Treatment								
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN	
					Type	Style	Page	Set																		
					General Purpose	2120	14	yes	•					•		•					•					
					Wide Land Parabolic	2175	16			•				•		•						•		•		•
					NAS907-C Heavy Duty	2330	19	yes	•					•		•				•	•					
					Heavy Duty	*2331G	22		•					•		•				•		•				
					Heavy Duty	2133	25			•				•		•				•			•		•	
					Spade Drill	1765	29				•			•		•					•					
					Stub Length	1767	30				•			•		•				•	•					

NEW

NEW

Jobber Drills

Jobber Drills					Tool Material				Application					Point				Surface Treatment						
	Type	Style	Page	Set	HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN
	General Purpose	*2001G, 2002G	32	yes	•				•	•	•	•			•					•	•			•
	General Purpose	2001, 2002	38	yes	•				•		•	•			•					•	•			
	Low Helix	2020	40		•				•			•			•					•				
	High Helix	2012	42		•				•			•			•					•				
	Parabolic	2065	44		•				•	•		•						•		•		•		
	Wide Land Parabolic	2075	46	yes		•			•	•	•	•							•			•	•	•
	Left Hand	2006	50		•				•		•	•			•					•				
	NAS907-A General Purpose	2228	51		•				•	•		•				•				•				
	NAS907-B Heavy Duty	2222	53	yes	•				•	•	•	•							•	•				
	NAS907-J Heavy Duty	2213	56	yes		•			•	•		•	•						•			•		
	Cotter Pin Heavy Duty	2011	61		•				•	•	•								•	•				
	Q-AMD Short Flute	3780	62	yes		•			•	•	•		•						•	•			•	

*Tool Material is Premium HSS

Jobber Drills (continued)

Jobber Drills (continued)					Tool Material				Application				Point				Surface Treatment								
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN

Taper Length Drills

Taper Length Drills					Tool Material				Application				Point				Surface Treatment								
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
		Type	Style	Page	Set																				
		Carbide Tipped Heavy Duty, Tanged	2745	69					•	•		•			•					•					
		General Purpose	2510	70	yes	•				•		•			•						•				
		High Helix	2550	74		•				•		•			•					•					
		Heavy Duty, Tanged	2513	76			•			•	•	•						•			•				
		Auto. Tanged Shank Heavy Duty	2540	77		•				•	•	•						•			•				
		Parabolic, Tanged	2565	78		•				•	•	•						•		•			•		
		Wide Land Parabolic	2575	80			•			•	•	•	•						•		•	•		•	

Aircraft Extension Drills

Aircraft Extension Drills					Tool Material				Application				Point				Surface Treatment								
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
		Type	Style	Page	Set																				
		NAS907-B 6" and 12"	3957	83		•				•	•	•	•						•	•					
		NAS907-J 6" and 12"	3722	85			•			•	•	•	•						•			•			

Extra Length Drills

Extra Length Drills					Tool Material		Application					Point			Surface Treatment										
					HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
					•				•	•							•			•					
					Extra Length	950E	87																		

Taper Shank Drills					Tool Material				Application					Point				Surface Treatment							
	Type	Style	Page	Set	HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	118° Split	118° 4-facet	118° K-Notch	135° Split	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
	Standard	2410	89		•				•		•				•						•				
	Undersized	2411	89		•				•		•				•						•				
	Oversized	2412	89		•				•		•				•						•				
	Cobalt Heavy Duty	2440	91			•			•	•	•				135° Mod. Point						•				
	Extra Length	940E	92		•				•		•							•			•				

Misc. Drills

Misc. Drills					Tool Material			Application					Point		Surface Treatment						
	Type	Style	Page	Set	HSS	Cobalt	Carbide	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	118°	Various degrees - see product page	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
	Combined Drill Countersink	1798	93				•	•	•	•	•				60°	•					
	Bell Type Drill & Countersink	996	94		•			•		•	•			•	60°, 120°	•					
	Plain Drill & Countersink	998	94	yes	•			•		•	•			•	60°	•					
	Countersink & Deburring	3001	95	yes		•		•	•		•				60°, 82°, 90°, 100°	•					
	Spotting & Centering - Short	995	96		•			•		•	•			•		•					
	NC Spotting & Centering - Short	2636	97	yes		•		•	•	•	•	•			90°, 120°			•			
	Spotting & Centering - Long	2646	97	yes		•		•	•	•	•	•			90°, 120°			•			
	NC Spotting Drill - Short	2635	98	yes	•			•	•	•	•				90°, 120°	•					
	NC Spotting Drill - Long	2645	98	yes	•			•	•	•	•				90°, 120°	•					
	Single Flute Countersink	10001	99	yes	•			•		•					60°, 82°, 90°, 100°, 120°	•					
	3 Flute Countersink	10003	99	yes	•			•		•					60°, 82°, 90°, 100°, 120°	•					
	4 Flute Countersink	610	100	yes	•			•		•					60°, 82°, 90°, 100°	•					
	Drift Drill	105	100		•											•					

Reamers					Tool Material		Application					Hole		Surface Treatment							
					HSS	Cobalt	Carbide	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind Hole	Thru Hole	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
		Type	Style	Page	Set																
		Straight Shank, Straight Flute	1730	101			•		•	•	•			•	•						
		Straight Shank, Straight Flute	4001	102	yes	•			•	•	•			•	•						
		Straight Shank, Spiral Flute	4030	106		•			•	•	•			•	•						
		Taper Shank, Straight Flute	4005	107		•			•	•	•			•	•						
		Straight Shank, Straight Flute	4703	108		•			•	•	•			•	•						
		Taper Shank, Bridge Reamer	616	109		•			•	•	•					•					
		Taper Shank, Car Reamer	618	109		•			•	•	•					•					
		Taper Pipe Reamer	642	110		•			•	•	•					•					
		High Spiral Spirex Taper Pin	650	110		•			•	•	•					•					
		Taper Pin Straight Shank, Straight Flute	657	111		•			•	•	•					•					
		Taper Pin Straight Shank, Helical Flute	659	111		•			•	•	•					•					

Counterbores					Tool Material		Application					Helix		Surface Treatment							
	Type	Style	Page	Set	HSS	Cobalt	Carbide	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind Hole	Thru Hole	Bright	Black Oxide	Straw	TiN	TiCN	TiAlN
	Straight Shank C'bore & Spot Facer	879	112		•			•		•	•					•					
	Short Aircraft Type	884	113		•			•		•	•					•					
	Interchangeable Pilot for Style 879 & 884	879P	114		•			•		•	•					•					
	Clearance or Taper Router	655	115		•			•		•	•					•					
	3 Flute Continuous Pilot	183	116	yes	•			•		•	•					•					

General Purpose

Style: **2120**

Note

* 1-1/16" through 1-1/4" drills have 1" diameter reduced shank.

Operating parameters begin on page 121.

ASME
B94.11M

HSS

118°


Helix
Regular
21° to 34°

Straight
Shank

Reduced
Shank

Surface
Treatment

Bright

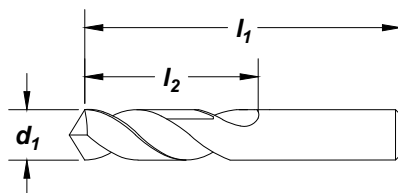

Feature:

Short length design for improved accuracy and rigidity.

drill diameter		decimal equiv.	overall length		flute length	order no.
d ₁	wire/let		l ₁ (in)	l ₂ (in)		
60		.0400	1.375	.500		C04356
59		.0410	1.375	.500		C04357
58		.0420	1.375	.500		C04359
57		.0430	1.375	.500		C04360
56		.0465	1.375	.500		C04363
3/64		.0469	1.375	.500		C04364
55		.0520	1.625	.625		C04368
54		.0550	1.625	.625		C04370
53		.0595	1.625	.625		C04374
1/16		.0625	1.625	.625		C04376
52		.0635	1.688	.688		C04378
51		.0670	1.688	.688		C04381
50		.0700	1.688	.688		C04383
49		.0730	1.688	.688		C04386
48		.0760	1.688	.688		C04388
5/64		.0781	1.688	.688		C04390
47		.0785	1.750	.750		C04391
46		.0810	1.750	.750		C04394
45		.0820	1.750	.750		C04395
44		.0860	1.750	.750		C04398
43		.0890	1.750	.750		C04401
42		.0935	1.750	.750		C04404
3/32		.0938	1.750	.750		C04405
41		.0960	1.813	.813		C04407
40		.0980	1.813	.813		C04409
39		.0995	1.813	.813		C04411
38		.1015	1.813	.813		C04412
37		.1040	1.813	.813		C04414
36		.1065	1.813	.813		C04416
7/64		.1094	1.813	.813		C04418
35		.1100	1.875	.875		C04419
34		.1110	1.875	.875		C04421
33		.1130	1.875	.875		C04422
32		.1160	1.875	.875		C04424
31		.1200	1.875	.875		C04426
1/8		.1250	1.875	.875		C04428
30		.1285	1.938	.938		C04431
29		.1360	1.938	.938		C04434
28		.1405	1.938	.938		C04436
9/64		.1406	1.938	.938		C04437

drill diameter		decimal equiv.	overall length		flute length	order no.
d ₁	wire/let		l ₁ (in)	l ₂ (in)		
27		.1440	2.063	1.000		C04439
26		.1470	2.063	1.000		C04441
25		.1495	2.063	1.000		C04443
24		.1520	2.063	1.000		C04445
23		.1540	2.063	1.000		C04447
5/32		.1562	2.063	1.000		C04448
22		.1570	2.125	1.063		C04449
21		.1590	2.125	1.063		C04451
20		.1610	2.125	1.063		C04452
19		.1660	2.125	1.063		C04455
18		.1695	2.125	1.063		C04458
11/64		.1719	2.125	1.063		C04459
17		.1730	2.188	1.125		C04460
16		.1770	2.188	1.125		C04462
15		.1800	2.188	1.125		C04464
14		.1820	2.188	1.125		C04466
13		.1850	2.188	1.125		C04467
3/16		.1875	2.188	1.125		C04470
12		.1890	2.250	1.188		C04471
11		.1910	2.250	1.188		C04473
10		.1935	2.250	1.188		C04475
9		.1960	2.250	1.188		C04476
8		.1990	2.250	1.188		C04478
7		.2010	2.250	1.188		C04480
13/64		.2031	2.250	1.188		C04481
6		.2040	2.375	1.250		C04482
5		.2055	2.375	1.250		C04484
4		.2090	2.375	1.250		C04487
3		.2130	2.375	1.250		C04489
7/32		.2188	2.375	1.250		C04491
2		.2210	2.438	1.313		C04493
1		.2280	2.438	1.313		C04496
A		.2340	2.438	1.313		C04499
15/64		.2344	2.438	1.313		C04500
B		.2380	2.500	1.375		C04502
C		.2420	2.500	1.375		C04504
D		.2460	2.500	1.375		C04506
1/4		.2500	2.500	1.375		C04509
F		.2570	2.625	1.438		C04513
G		.2610	2.625	1.438		C04515

continued on next page


Style: 2120 (continued)
General Purpose

drill diameter d ₁		decimal	overall length	flute length	order no.
frac	wire/let	equiv.	l ₁ (in)	l ₂ (in)	2120
17/64		.2656	2.625	1.438	C04517
	H	.2660	2.688	1.500	C04519
	I	.2720	2.688	1.500	C04522
	J	.2770	2.688	1.500	C04524
	K	.2810	2.688	1.500	C04526
9/32		.2812	2.688	1.500	C04531
	L	.2900	2.750	1.563	C04530
	M	.2950	2.750	1.563	C04533
19/64		.2969	2.750	1.563	C04535
	N	.3020	2.813	1.625	C04537
5/16		.3125	2.813	1.625	C04542
	O	.3160	2.938	1.688	C04544
	P	.3230	2.938	1.688	C04547
21/64		.3281	2.938	1.688	C04550
	Q	.3320	3.000	1.688	C04552
	R	.3390	3.000	1.688	C04555
11/32		.3438	3.000	1.688	C04557
	S	.3480	3.063	1.750	C04560
	T	.3580	3.063	1.750	C04563
23/64		.3594	3.063	1.750	C04565
	U	.3680	3.125	1.813	C04569
3/8		.3750	3.125	1.813	C04572
	V	.3770	3.250	1.875	C04573
	W	.3860	3.250	1.875	C04578
25/64		.3906	3.250	1.875	C04580
	X	.3970	3.313	1.938	C04582
	Y	.4040	3.313	1.938	C04584
13/32		.4062	3.313	1.938	C04585
	Z	.4130	3.375	2.000	C04586
27/64		.4219	3.375	2.000	C04588
7/16		.4375	3.438	2.063	C04591
29/64		.4531	3.563	2.125	C04594
15/32		.4688	3.625	2.125	C04596
31/64		.4844	3.688	2.188	C04599
1/2		.5000	3.750	2.250	C04601
33/64		.5156	3.875	2.375	C04604

drill diameter d ₁		decimal	overall length	flute length	order no.
frac	wire/let	equiv.	l ₁ (in)	l ₂ (in)	2120
17/32		.5312	3.875	2.375	C04606
35/64		.5469	4.000	2.500	C04609
9/16		.5625	4.000	2.500	C04612
37/64		.5781	4.125	2.625	C04614
19/32		.5938	4.125	2.625	C04617
39/64		.6094	4.250	2.750	C04619
5/8		.6250	4.250	2.750	C04622
41/64		.6406	4.500	2.875	C04625
21/32		.6562	4.500	2.875	C04627
43/64		.6719	4.625	2.875	C04630
11/16		.6875	4.625	2.875	C04632
45/64		.7031	4.750	3.000	C04634
23/32		.7188	4.750	3.000	C04636
47/64		.7344	5.000	3.125	C04638
3/4		.7500	5.000	3.125	C04640
49/64		.7656	5.125	3.250	C04641
25/32		.7812	5.125	3.250	C04643
51/64		.7969	5.250	3.375	C04645
13/16		.8125	5.250	3.375	C04647
53/64		.8281	5.375	3.500	C04649
27/32		.8438	5.375	3.500	C04650
55/64		.8594	5.500	3.500	C04652
7/8		.8750	5.500	3.500	C04654
57/64		.8906	5.625	3.625	C04656
29/32		.9062	5.625	3.625	C04658
59/64		.9219	5.750	3.750	C04659
15/16		.9375	5.750	3.750	C04661
61/64		.9531	5.875	3.875	C04663
31/32		.9688	5.875	3.875	C04665
63/64		.9844	6.000	4.000	C04667
1		1.0000	6.000	4.000	C04668
1-1/16*		1.0625	6.250	4.000	C04675
1-1/8*		1.1250	6.375	4.000	C04683
1-3/16*		1.1875	6.625	4.250	C04690
1-1/4*		1.2500	6.750	4.375	C04697

* 1-1/16" through 1-1/4" drills have 1" shank.

Screw Machine Length
High Speed Steel

SET
Style: 2120
General Purpose


29-Piece Set
#C00980

no. of pieces	surface treatment	size range	order number
29	Bright	1/16" through 1/2" x 1/64"	C00980
26	Bright	letter A through Z	C01332

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						>45
	Bright	★		★					★		☆		

☆ = Best Performance ★ = Acceptable

Note

Operating parameters begin on page 121.

ASME
B94.11M

M42
Cobalt

135° Split

Helix
High
35° to 45°

Straight
Shank


Surface
Treatment

Straw
Oxide

TiN

TiCN

TiAlN

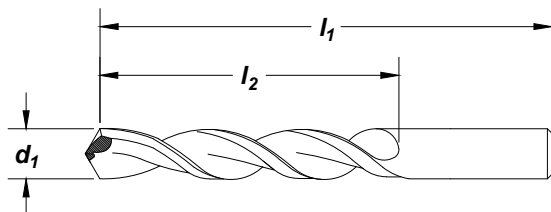
Feature:

Effective deep hole drilling in a wide array of materials. Available coating for extended tool life and productivity. Shorter design for accuracy and rigidity.

drill diameter d ₁		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number			
fraction	wire/letter				2175 straw oxide	2175-TN TiN	2175-TC TiCN	2175-TA TiAlN
1/16		.0625	1.625	.625	C14200	C14321	C15250	C15050
	52	.0635	1.688	.688	C14318	C14439	—	—
	51	.0670	1.688	.688	C14317	C14438	—	—
	50	.0700	1.688	.688	C14316	C14437	—	—
	49	.0730	1.688	.688	C14315	C14436	—	—
	48	.0760	1.688	.688	C14314	C14435	—	—
5/64		.0781	1.688	.688	C14201	C14322	C15251	C15051
	47	.0785	1.750	.750	C14313	C14434	—	—
	46	.0810	1.750	.750	C14312	C14433	—	—
	45	.0820	1.750	.750	C14311	C14432	—	—
	44	.0860	1.750	.750	C14310	C14431	—	—
	43	.0890	1.750	.750	C14309	C14430	—	—
3/32	42	.0935	1.750	.750	C14308	C14429	—	—
		.0938	1.750	.750	C14202	C14323	C15252	C15052
	41	.0960	1.813	.813	C14307	C14428	—	—
	40	.0980	1.813	.813	C14280	C14402	C15330	C15130
	39	.0995	1.813	.813	C14279	C14401	C15329	C15129
	38	.1015	1.813	.813	C14278	C14400	C15328	C15128
7/64	37	.1040	1.813	.813	C14277	C14399	C15327	C15127
	36	.1065	1.813	.813	C14276	C14398	C15326	C15126
		.1094	1.813	.813	C14203	C14324	C15253	C15053
	35	.1100	1.875	.875	C14275	C14397	C15325	C15125
	34	.1110	1.875	.875	C14274	C14396	C15324	C15124
	33	.1130	1.875	.875	C14273	C14395	C15323	C15123
1/8	32	.1160	1.875	.875	C14272	C14393	C15322	C15122
	31	.1200	1.875	.875	C14271	C14392	C15321	C15121
		.1250	1.875	.875	C14204	C14325	C15254	C15054
	30	.1285	1.938	.938	C14270	C14391	C15320	C15120
	29	.1360	1.938	.938	C14269	C14390	C15319	C15119
	28	.1405	1.938	.938	C14268	C14389	C15318	C15118
9/64		.1406	1.938	.938	C14205	C14326	C15255	C15055
	27	.1440	2.063	1.000	C14267	C14388	C15317	C15117
	26	.1470	2.063	1.000	C14266	C14387	C15316	C15116
	25	.1495	2.063	1.000	C14265	C14386	C15315	C15115
	24	.1520	2.063	1.000	C14264	C14385	C15314	C15114
	23	.1540	2.063	1.000	C14263	C14384	C15313	C15113
5/32		.1562	2.063	1.000	C14206	C14327	C15256	C15056
	22	.1570	2.125	1.063	C14262	C14383	C15312	C15112
	21	.1590	2.125	1.063	C14261	C14382	C15311	C15111
	20	.1610	2.125	1.063	C14260	C14381	C15310	C15110
	19	.1660	2.125	1.063	C14259	C14380	C15309	C15109
	18	.1695	2.125	1.063	C14258	C14379	C15308	C15108
11/64		.1719	2.125	1.063	C14207	C14328	C15257	C15057

continued on next page

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number			
fraction	d ₁ wire/letter				2175 straw oxide	2175-TN TiN	2175-TC TiCN	2175-TA TiAlN
	17	.1730	2.188	1.125	C14257	C14378	C15307	C15107
	16	.1770	2.188	1.125	C14256	C14377	C15306	C15106
	15	.1800	2.188	1.125	C14255	C14376	C15305	C15105
	14	.1820	2.188	1.125	C14254	C14375	C15304	C15104
	13	.1850	2.188	1.125	C14253	C14374	C15303	C15103
3/16		.1875	2.188	1.125	C14208	C14329	C15258	C15058
	12	.1890	2.250	1.188	C14252	C14373	C15302	C15102
	11	.1910	2.250	1.188	C14251	C14372	C15301	C15101
	10	.1935	2.250	1.188	C14250	C14371	C15300	C15100
	9	.1960	2.250	1.188	C14249	C14370	C15299	C15099
	8	.1990	2.250	1.188	C14248	C14369	C15298	C15098
	7	.2010	2.250	1.188	C14247	C14368	C15297	C15097
13/64		.2031	2.250	1.188	C14209	C14330	C15259	C15059
	6	.2040	2.375	1.250	C14246	C14367	C15296	C15096
	5	.2055	2.375	1.250	C14245	C14366	C15295	C15095
	4	.2090	2.375	1.250	C14244	C14365	C15294	C15094
	3	.2130	2.375	1.250	C14243	C14364	C15293	C15093
7/32		.2188	2.375	1.250	C14210	C14331	C15260	C15060
	2	.2210	2.438	1.313	C14242	C14363	C15292	C15092
	1	.2280	2.438	1.313	C14241	C14362	C15291	C15091
	A	.2340	2.438	1.313	C14281	C14403	C15331	C15131
15/64		.2344	2.438	1.313	C14211	C14332	C15261	C15061
	B	.2380	2.500	1.375	C14282	C14404	C15332	C15132
	C	.2420	2.500	1.375	C14283	C14405	C15333	C15133
	D	.2460	2.500	1.375	C14284	C14406	C15334	C15134
1/4		.2500	2.500	1.375	C14212	C14333	C15262	C15062
	F	.2570	2.625	1.438	C14286	C14407	C15335	C15135
	G	.2610	2.625	1.438	C14287	C14408	C15336	C15136
17/64		.2656	2.625	1.438	C14213	C14334	C15263	C15063
	H	.2660	2.688	1.500	C14288	C14409	C15337	C15137
	I	.2720	2.688	1.500	C14289	C14410	C15338	C15138
	J	.2770	2.688	1.500	C14290	C14411	C15339	C15139
	K	.2810	2.688	1.500	C14291	C14412	C15340	C15140
9/32		.2812	2.688	1.500	C14214	C14335	C15264	C15064
	L	.2900	2.750	1.563	C14292	C14413	C15341	C15141
	M	.2950	2.750	1.563	C14293	C14414	C15342	C15142
19/64		.2969	2.750	1.563	C14215	C14336	C15265	C15065
	N	.3020	2.813	1.625	C14294	C14415	C15343	C15143
5/16		.3125	2.813	1.625	C14216	C14337	C15266	C15066
	O	.3160	2.938	1.688	C14295	C14416	C15344	C15144
	P	.3230	2.938	1.688	C14296	C14417	C15345	C15145
21/64		.3281	2.938	1.688	C14217	C14338	C15267	C15067
	Q	.3320	3.000	1.688	C14297	C14418	C15346	C15146
	R	.3390	3.000	1.688	C14298	C14419	C15347	C15147
11/32		.3438	3.000	1.688	C14218	C14339	C15268	C15068

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
TiN	★			★									
TiCN	☆			☆		★	★	★	★	☆			
TiAlN						☆	☆	☆	☆				

★ = Best Performance ☆ = Acceptable

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number			
fraction	d ₁ wire/letter				2175 straw oxide	2175-TN TiN	2175-TC TiCN	2175-TA TiAlN
	S	.3480	3.063	1.750	C14299	C14420	C15348	C15148
	T	.3580	3.063	1.750	C14300	C14421	C15349	C15149
23/64		.3594	3.063	1.750	C14219	C14340	C15269	C15069
	U	.3680	3.125	1.813	C14301	C14422	C15350	C15150
3/8		.3750	3.125	1.813	C14220	C14341	C15270	C15070
	V	.3770	3.250	1.875	C14302	C14423	C15351	C15151
	W	.3860	3.250	1.875	C14303	C14424	C15352	C15152
25/64		.3906	3.250	1.875	C14221	C14342	C15271	C15071
	X	.3970	3.313	1.938	C14304	C14425	C15353	C15153
	Y	.4040	3.313	1.938	C14305	C14426	C15354	C15154
13/32		.4062	3.313	1.938	C14222	C14343	C15272	C15072
	Z	.4130	3.375	2.000	C14306	C14427	C15355	C15155
27/64		.4219	3.375	2.000	C14223	C14344	C15273	C15073
7/16		.4375	3.438	2.063	C14224	C14345	C15274	C15074
29/64		.4531	3.563	2.125	C14225	C14346	C15275	C15075
15/32		.4688	3.625	2.125	C14226	C14347	C15276	C15076
31/64		.4844	3.688	2.188	C14227	C14348	C15277	C15077
1/2		.5000	3.750	2.250	C14228	C14349	C15278	C15078
33/64		.5156	3.875	2.375	C14229	C14350	C15279	C15079
17/32		.5312	3.875	2.375	C14230	C14351	C15280	C15080
35/64		.5469	4.000	2.500	C14231	C14352	C15281	C15081
9/16		.5625	4.000	2.500	C14232	C14353	C15282	C15082
37/64		.5781	4.125	2.625	C14233	C14354	C15283	C15083
19/32		.5938	4.125	2.625	C14234	C14355	C15284	C15084
39/64		.6094	4.250	2.750	C14235	C14356	C15285	C15085
5/8		.6250	4.250	2.750	C14236	C14357	C15286	C15086
41/64		.6406	4.500	2.875	C14237	C14358	C15287	C15087
21/32		.6562	4.500	2.875	C14238	C14359	C15288	C15088
43/64		.6719	4.625	2.875	C14239	C14360	C15289	C15089
11/16		.6875	4.625	2.875	C14240	C14361	C15290	C15090

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
TiN	★		★										
TiCN	☆		☆		★	★		★	★	☆			
TiAlN					☆	☆		☆	☆				



☆ = Best Performance ★ = Acceptable

Style: 2330
Aircraft NAS 907, Type C
Heavy Duty

Note
 Operating parameters begin on page 121.

 NAS 907
 TYPE C

HSS

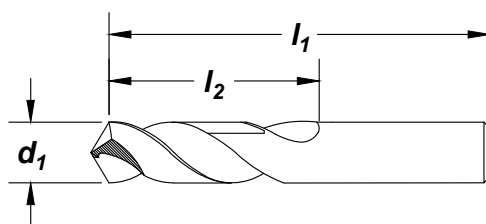
 Surface
 Treatment


Screw Machine Length

High Speed Steel

Feature:

Heavy duty design for tougher materials.

drill diameter		decimal equiv.	overall length		flute length		order number
fraction	d ₁ wire		l ₁ (in)		l ₂ (in)		
*3/64		.0469	1.375		.500		C70250
1/16		.0625	1.625		.625		C70251
	52	.0635	1.688		.688		C70356
	51	.0670	1.688		.688		C70355
	50	.0700	1.688		.688		C70354
	49	.0730	1.688		.688		C70353
	48	.0760	1.688		.688		C70352
5/64		.0781	1.688		.688		C70252
	47	.0785	1.750		.750		C70351
	46	.0810	1.750		.750		C70350
	45	.0820	1.750		.750		C70349
	44	.0860	1.750		.750		C70348
	43	.0890	1.750		.750		C70347
	42	.0935	1.750		.750		C70346
3/32		.0938	1.750		.750		C70253
	41	.0960	1.813		.813		C70345
	40	.0980	1.813		.813		C70344
	39	.0995	1.813		.813		C70343
	38	.1015	1.813		.813		C70342
	37	.1040	1.813		.813		C70341
	36	.1065	1.813		.813		C70340
7/64		.1094	1.813		.813		C70254
	35	.1100	1.875		.875		C70339
	34	.1110	1.875		.875		C70338
	33	.1130	1.875		.875		C70337
	32	.1160	1.875		.875		C70336
	31	.1200	1.875		.875		C70335
1/8		.1250	1.875		.875		C70255
	30	.1285	1.938		.938		C70334
	29	.1360	1.938		.938		C70333
	28	.1405	1.938		.938		C70332
9/64		.1406	1.938		.938		C70256

*Not split point.

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆		◆			☆	☆	◆		

☆ = Best Performance ◆ = Acceptable

drill diameter d ₁		decimal equiv.	overall length		flute length		order number 2330
fraction	wire		l ₁ (in)		l ₂ (in)		
	27	.1440	2.063		1.000		C70331
	26	.1470	2.063		1.000		C70330
	25	.1495	2.063		1.000		C70329
	24	.1520	2.063		1.000		C70328
	23	.1540	2.063		1.000		C70327
5/32		.1562	2.063		1.000		C70257
	22	.1570	2.125		1.063		C70326
	21	.1590	2.125		1.063		C70325
	20	.1610	2.125		1.063		C70324
	19	.1660	2.125		1.063		C70323
	18	.1695	2.125		1.063		C70322
11/64		.1719	2.125		1.063		C70258
	17	.1730	2.188		1.125		C70321
	16	.1770	2.188		1.125		C70320
	15	.1800	2.188		1.125		C70319
	14	.1820	2.188		1.125		C70318
	13	.1850	2.188		1.125		C70317
3/16		.1875	2.188		1.125		C70259
	12	.1890	2.250		1.188		C70316
	11	.1910	2.250		1.188		C70315
	10	.1935	2.250		1.188		C70314
	9	.1960	2.250		1.188		C70313
	8	.1990	2.250		1.188		C70312
	7	.2010	2.250		1.188		C70311
13/64		.2031	2.250		1.188		C70260
	6	.2040	2.375		1.250		C70310
	5	.2055	2.375		1.250		C70309
	4	.2090	2.375		1.250		C70308
	3	.2130	2.375		1.250		C70307
7/32		.2188	2.375		1.250		C70261
	2	.2210	2.438		1.313		C70306
	1	.2280	2.438		1.313		C70305
	A	.2340	2.438		1.313		C70280
15/64		.2344	2.438		1.313		C70262
	B	.2380	2.500		1.375		C70281
	C	.2420	2.500		1.375		C70282
	D	.2460	2.500		1.375		C70283
1/4		.2500	2.500		1.375		C70263
	F	.2570	2.625		1.438		C70284
	G	.2610	2.625		1.438		C70285
17/64		.2656	2.625		1.438		C70264
	H	.2660	2.688		1.500		C70286
	I	.2720	2.688		1.500		C70287
	J	.2770	2.688		1.500		C70288
9/32		.2812	2.688		1.500		C70265
	K	.2812	2.688		1.500		C70289
	L	.2900	2.750		1.563		C70290
	M	.2950	2.750		1.563		C70291
19/64		.2969	2.750		1.563		C70266
	N	.3020	2.813		1.625		C70292
5/16		.3125	2.813		1.625		C70267
	O	.3160	2.813		1.688		C70293
	P	.3230	2.813		1.688		C70294
21/64		.3281	2.813		1.688		C70268
	Q	.3320	3.000		1.688		C70295
	R	.3390	3.000		1.688		C70296
11/32		.3438	3.000		1.688		C70269
	S	.3480	3.063		1.750		C70297

continued on next page

Style: 2330 (continued)
Aircraft NAS 907, Type C
Heavy Duty

drill diameter d₁		decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 2330
fraction	wire				
23/64	T	.3580	3.063	1.750	C70298
		.3594	3.063	1.750	C70270
3/8	U	.3680	3.125	1.813	C70299
		.3750	3.125	1.813	C70271
	V	.3770	3.250	1.875	C70300
	W	.3860	3.250	1.875	C70301
		.3906	3.250	1.875	C70272
25/64	X	.3970	3.313	1.938	C70302
	Y	.4040	3.313	1.938	C70303
13/32		.4062	3.313	1.938	C70273
	Z	.4130	3.375	2.000	C70304
27/64		.4219	3.375	2.000	C70274
7/16		.4375	3.438	2.063	C70275
29/64		.4531	3.563	2.125	C70276
15/32		.4688	2.625	2.125	C70277
31/64		.4844	3.688	2.188	C70278
1/2		.5000	3.750	2.250	C70279

Screw Machine Length
High Speed Steel
SET
Style: 2330
Aircraft NAS 907, Type C
Heavy Duty


29-Piece Set
#C70368

no. of pieces	surface treatment	size range	order number
			2330
15	Bright	1/16" through 1/2" x 1/32"	C70370
21	Bright	1/16" through 3/8" x 1/64"	C70369
29	Bright	1/16" through 1/2" x 1/64"	C70368

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆		◆			☆	☆	◆		

☆ = Best Performance ◆ = Acceptable

Heavy Duty

Style: **2331G**

Note
Operating parameters begin on page 121.

ASME
B94.11M

DIN
1897

PREMIUM
HSS


135° Split

Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Black
Oxide

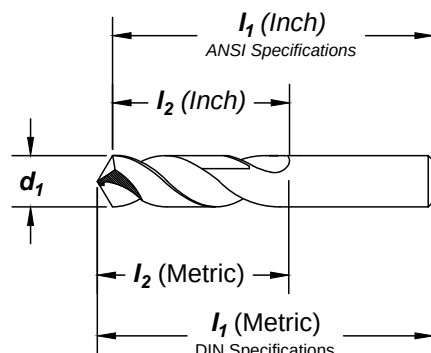

Feature:

Premium HSS grade for increased tool life. Short length design for improved accuracy and rigidity.

drill diameter			overall length		flute length		order number	
fraction	d ₁	mm	decimal	l ₁	mm	l ₂		
	wire		equiv.	in		in		mm
	60*		.0400	1.375		.500	C74509	
	59*		.0410	1.375		.500	C74508	
	58*		.0420	1.375		.500	C74507	
	57*		.0430	1.375		.500	C74506	
	56*		.0465	1.375		.500	C74505	
	55*		.0520	1.625		.625	C74504	
	54*		.0550	1.625		.625	C74503	
	53*		.0595	1.625		.625	C74502	
1/16			.0625	1.625		.625	C74360	
	52		.0635	1.688		.688	C74501	
	51		.0670	1.688		.688	C74500	
	50		.0700	1.688		.688	C74499	
	49		.0730	1.688		.688	C74498	
	48		.0760	1.688		.688	C74497	
5/64			.0781	1.688		.688	C74361	
	47		.0785	1.750		.750	C74496	
		2.0	.0787		38.00		12.00	C74560
	46		.0810	1.750		.750	C74495	
	45		.0820	1.750		.750	C74494	
	44		.0860	1.750		.750	C74493	
	43		.0890	1.750		.750	C74492	
	42		.0935	1.750		.750	C74491	
3/32			.0938	1.750		.750	C74362	
	41		.0960	1.813		.813	C74490	
	40		.0980	1.813		.813	C74489	
		2.5	.0984		43.00		14.00	C74561
	39		.0995	1.813		.813	C74488	
	38		.1015	1.813		.813	C74487	
	37		.1040	1.813		.813	C74486	
	36		.1065	1.813		.813	C74485	
7/64			.1094	1.813		.813	C74363	
	35		.1100	1.875		.875	C74484	
	34		.1110	1.875		.875	C74483	
	33		.1130	1.875		.875	C74482	

*Not split point.

continued on next page

Style: 2331G (continued)
Heavy Duty

drill diameter			decimal equiv.	overall length		flute length		order number
fraction	d1 wire	mm		in	mm	in	mm	
1/8	32		.1160	1.875		.875		C74481
		3.0	.1181		46.00		16.00	C74562
	31		.1200	1.875		.875		C74480
			.1250	1.875		.875		C74364
		3.2	.1260		49.00		18.00	C74563
	30		.1285	1.938		.938		C74479
		3.3	.1299		49.00		18.00	C74564
	29		.1360	1.938		.938		C74478
9/64		3.5	.1378		52.00		20.00	C74565
	28		.1405	1.938		.938		C74477
			.1406	1.938		.938		C74365
	27		.1440	2.063		1.000		C74476
	26		.1470	2.063		1.000		C74475
	25		.1495	2.063		1.000		C74474
	24		.1520	2.063		1.000		C74473
	23		.1540	2.063		1.000		C74472
5/32			.1562	2.063		1.000		C74366
	22		.1570	2.125		1.063		C74471
		4.0	.1575		55.00		22.00	C74566
	21		.1590	2.125		1.063		C74470
	20		.1610	2.125		1.063		C74469
		4.1	.1614		55.00		22.00	C74567
		4.2	.1654		55.00		22.00	C74568
	19		.1660	2.125		1.063		C74468
		4.3	.1693		58.00		24.00	C74569
	18		.1695	2.125		1.063		C74467
			.1719	2.125		1.063		C74367
	17		.1730	2.188		1.125		C74466
11/64	16		.1770	2.188		1.125		C74465
		4.5	.1772		58.00		24.00	C74570
	15		.1800	2.188		1.125		C74464
	14		.1820	2.188		1.125		C74463
	13		.1850	2.188		1.125		C74462
		4.7	.1850		58.00		24.00	C74571
	3/16		.1875	2.188		1.125		C74368
	12		.1890	2.250		1.188		C74461
		4.8	.1890		62.00		26.00	C74572
	11		.1910	2.250		1.188		C74460
		4.9	.1929		62.00		26.00	C74573
	10		.1935	2.250		1.188		C74459
	9		.1960	2.250		1.188		C74458
		5.0	.1968		62.00		26.00	C74574
	8		.1990	2.250		1.188		C74457
	7		.2010	2.250		1.188		C74456
13/64			.2031	2.250		1.188		C74369
	6		.2040	2.375		1.250		C74455
		5.2	.2047		62.00		26.00	C74575
	5		.2055	2.375		1.250		C74454

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Black Oxide	☆			☆		☆		☆	☆				

☆ = Best Performance ◆ = Acceptable

Heavy Duty

Style: **2331G** (continued)

Screw Machine Length

Premium High Speed Steel

drill diameter			decimal equiv.	overall length		flute length		order number
fraction	d ₁ wire	mm		l ₁ in	mm	l ₂ in	mm	
	4		.2090	2.375		1.250		C74453
	3		.2130	2.375		1.250		C74452
		5.5	.2165		66.00		28.00	C74576
7/32			.2188	2.375		1.250		C74370
	2		.2210	2.438		1.313		C74451
		5.7	.2244		66.00		28.00	C74577
	1		.2280	2.738		1.313		C74450
15/64			.2344	2.738		1.313		C74371
		6.0	.2362		66.00		28.00	C74578
		6.1	.2402		70.00		31.00	C74579
1/4			.2500	2.500		1.375		C74372
		6.5	.2559		70.00		31.00	C74580
17/64			.2656	2.625		1.438		C74373
		6.8	.2677		74.00		34.00	C74581
		7.0	.2756		74.00		34.00	C74582
9/32			.2812	2.688		1.500		C74374
		7.5	.2953		74.00		34.00	C74583
19/64			.2969	2.750		1.563		C74375
5/16			.3125	2.813		1.625		C74376
		8.0	.3150		79.00		37.00	C74584
21/64			.3281	2.938		1.688		C74377
		8.5	.3346		79.00		37.00	C74585
11/32			.3438	3.000		1.688		C74378
23/64			.3594	3.063		1.750		C74379
3/8			.3750	3.125		1.813		C74380
25/64			.3906	3.250		1.875		C74381
13/32			.4062	3.313		1.938		C74382
27/64			.4219	3.375		2.000		C74383
7/16			.4375	3.438		2.063		C74384
29/64			.4531	3.563		2.125		C74385
15/32			.4688	3.625		2.125		C74386
31/64			.4844	3.688		2.188		C74387
1/2			.5000	3.750		2.250		C74388

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Black Oxide	☆			☆		☆		☆	☆				
☆ = Best Performance ♦ = Acceptable													

Note

Operating parameters begin on page 121.

ASME
B94.11M

DIN
1897

M42
Cobalt

135° Split


Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Straw
Oxide

TiCN

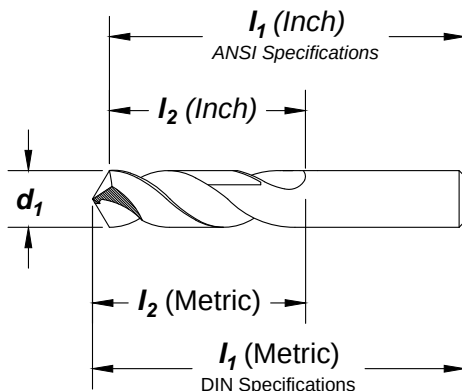

Screw Machine Length

Cobalt

Feature:

Highly heat resistant substrate for tough to machine materials.

drill diameter			overall length		flute length		order number	
fraction	d ₁ wire/letter	mm	decimal equiv.	I ₁ in mm	I ₂ in mm		2133 straw oxide	2133-TC TiCN
	*60		.0400	1.375	.500		C14501	—
	*59		.0410	1.375	.500		C14502	—
	*58		.0420	1.375	.500		C14504	—
	*57		.0430	1.375	.500		C14505	—
	*56		.0465	1.375	.500		C14508	—
*3/64			.0469	1.375	.500		C14509	—
		*1.2	.0472	30.00	8.00		C14835	—
	*55		.0520	1.625	.625		C14513	—
	*54		.0550	1.625	.625		C14515	—
		*1.5	.0591	32.00	9.00		C14838	—
	*53		.0595	1.625	.625		C14519	—
1/16			.0625	1.625	.625		C14521	C14846
		1.6	.0630	34.00	10.00		C14748	—
	52		.0635	1.688	.688		C14523	—
	51		.0670	1.688	.688		C14526	—
	50		.0700	1.688	.688		C14528	—
	49		.0730	1.688	.688		C14531	—
	48		.0760	1.688	.688		C14533	—
5/64			.0781	1.688	.688		C14535	—
	47		.0785	1.750	.750		C14536	—
		2.0	.0787	38.00	12.00		C14800	C14749

*Not split point.

continued on next page



Benefits of 2133 Cobalt Screw Machine Drill

- Cobalt provides high heat resistance for tough applications.
- Short flutes provide enhanced rigidity and drill more accurate holes.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Straw	★		★		★	★		★	★				
TiCN	☆		☆		☆	☆		☆	☆	☆	★	★	

☆ = Best Performance

★ = Acceptable

Heavy Duty

Styles: **2133, 2133-TC** (continued)

Screw Machine Length

Cobalt

drill diameter			decimal equiv.	overall length		flute length		order number	
fraction	d1 wire/letter	mm		l1 in	mm	l2 in	mm	2133 straw oxide	2133-TC TiCN
	46		.0810	1.750		.750		C14539	—
	45		.0820	1.750		.750		C14540	—
	44		.0860	1.750		.750		C14543	—
	43		.0890	1.750		.750		C14546	—
	42		.0935	1.750		.750		C14549	—
3/32			.0938	1.750		.750		C14550	C14848
		2.4	.0945		43.00		14.00	C14790	—
	41		.0960	1.813		.813		C14552	—
	40		.0980	1.813		.813		C14554	—
		2.5	.0984	1.693	43.00	.551	14.00	C14820	C14750
	39		.0995	1.813		.813		C14556	—
	38		.1015	1.813		.813		C14557	—
		2.6	.1024	1.693	43.00	.551	14.00	C14840	C14730
	37		.1040	1.813		.813		C14559	—
	36		.1065	1.813		.813		C14561	—
7/64			.1094	1.813		.813		C14562	—
	35		.1100	1.875		.875		C14563	—
		2.8	.1102		46.00		16.00	C14841	—
	34		.1110	1.875		.875		C14565	—
	33		.1130	1.875		.875		C14566	—
	32		.1160	1.875		.875		C14568	—
		3.0	.1181		46.00		16.00	C14821	C14751
	31		.1200	1.875		.875		C14570	—
		3.1	.1220		49.00		18.00	C14822	C14752
1/8			.1250	1.875		.875		C14572	C14850
		3.2	.1260		49.00		18.00	C14801	C14753
	30		.1285	1.938		.938		C14574	—
		3.3	.1299		49.00		18.00	C14802	C14754
	29		.1360	1.938		.938		C14577	—
		3.5	.1378		52.00		20.00	C14803	C14755
	28		.1405	1.938		.938		C14579	—
9/64			.1406	1.938		.938		C14580	—
	27		.1440	2.063		1.000		C14582	—
		3.7	.1457		52.00		20.00	C14823	—
	26		.1470	2.063		1.000		C14584	—
	25		.1495	2.063		1.000		C14585	—
	24		.1520	2.063		1.000		C14587	—
	23		.1540	2.063		1.000		C14589	—
5/32			.1562	2.063		1.000		C14590	C14852
	22		.1570	2.125		1.063		C14591	—
		4.0	.1575		55.00		22.00	C14824	C14756
	21		.1590	2.125		1.063		C14593	—
	20		.1610	2.125		1.063		C14594	—
		4.1	.1614		55.00		22.00	C14825	C14757
		4.2	.1654		55.00		22.00	C14804	C14758
	19		.1660	2.125		1.063		C14597	—
	18		.1695	2.125		1.063		C14599	—
11/64			.1719	2.125		1.063		C14600	—
	17		.1730	2.188		1.125		C14601	—
	16		.1770	2.188		1.125		C14603	—
		4.5	.1772		58.00		24.00	C14805	C14759
	15		.1800	2.188		1.125		C14605	—
		4.6	.1811		58.00		24.00	C14842	C14728
	14		.1820	2.188		1.125		C14607	—
	13		.1850	2.188		1.125		C14608	—
3/16			.1875	2.188		1.125		C14610	C14854
		4.8	.1890		62.00		26.00	C14806	C14760

continued on next page

drill diameter			overall length		flute length		order number	
fraction	d1 wire/letter	mm	decimal equiv.	l1 in mm	l2 in mm	mm	2133 straw oxide	2133-TC TiCN
	12		.1890	2.250		1.188	C14611	—
	11		.1910	2.250		1.188	C14613	—
		4.9	.1929		62.00	26.00	C14826	—
	10		.1935	2.250		1.188	C14615	—
	9		.1960	2.250		1.188	C14616	—
		5.0	.1969		62.00	26.00	C14827	C14761
	8		.1990	2.250		1.188	C14618	—
		5.1	.2008		62.00	26.00	C14807	C14762
	7		.2010	2.250		1.188	C14620	—
13/64			.2031	2.250		1.188	C14621	—
	6		.2040	2.375		1.250	C14622	—
	5		.2055	2.375		1.250	C14624	—
	4		.2090	2.375		1.250	C14626	—
	3		.2130	2.375		1.250	C14628	—
		5.5	.2165		66.00	28.00	C14828	C14786
7/32			.2188	2.375		1.250	C14630	C14856
		5.6	.2205		66.00	28.00	C14843	—
	2		.2210	2.438		1.313	C14632	—
		5.7	.2244		66.00	28.00	C14844	—
	1		.2280	2.438		1.313	C14634	—
	A		.2340	2.438		1.313	C14637	—
15/64			.2344	2.438		1.313	C14638	—
		6.0	.2362		28.00	28.00	C14829	C14763
	B		.2380	2.500		1.375	C14640	—
		6.1	.2402		70.00	31.00	C14869	—
	C		.2420	2.500		1.375	C14642	—
	D		.2460	2.500		1.375	C14644	—
1/4, E			.2500	2.500		1.375	C14646	C14858
		6.5	.2559		70.00	31.00	C14808	C14764
	F		.2570	2.625		1.438	C14649	—
		6.6	.2598		70.00	31.00	C14809	—
	G		.2610	2.625		1.438	C14651	—
17/64			.2656	2.625		1.438	C14653	—
	H		.2660	2.688		1.500	C14654	—
		6.8	.2677		74.00	34.00	C14810	C14765
	I		.2720	2.688		1.500	C14657	—
		7.0	.2756		74.00	34.00	C14830	C14766
	J		.2770	2.688		1.500	C14659	—
	K		.2810	2.688		1.500	C14661	—
9/32			.2812	2.688		1.500	C14664	C14860
	L		.2900	2.750		1.563	C14665	—
		7.4	.2913		74.00	34.00	C14811	—
	M		.2950	2.750		1.563	C14667	—
		7.5	.2953		74.00	34.00	C14831	C14787
19/64			.2969	2.750		1.563	C14669	—
	N		.3020	2.813		1.625	C14671	—
5/16			.3125	2.813		1.625	C14675	C14861

continued on next page


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Straw	★		★		★	★		★	★				
TiCN	☆		☆		☆	☆		☆	☆	☆	★	★	

☆ = Best Performance ★ = Acceptable

drill diameter		decimal equiv.	overall length		flute length		order number	
fraction	d ₁ wire/letter		l ₁ in	mm	l ₂ in	mm	2133 straw oxide	2133-TC TiCN
		8.0	.3150		79.00	37.00	C14812	C14767
	O		.3160	2.938	1.688		C14677	—
		8.1	.3189		79.00	37.00	C14670	—
	P		.3230	2.938	1.688		C14680	—
21/64			.3281	2.938	1.688		C14682	—
	Q		.3320	3.000	1.688		C14684	—
		8.5	.3346		79.00	37.00	C14813	C14768
	R		.3390	3.000	1.688		C14687	—
11/32			.3438	3.000	1.688		C14689	C14862
	S		.3480	3.063	1.750		C14691	—
		9.0	.3543		84.00	40.00	C14814	C14769
	T		.3580	3.063	1.750		C14694	—
23/64			.3594	3.063	1.750		C14696	—
	U		.3680	3.125	1.813		C14699	—
		9.5	.3740		84.00	40.00	—	C14770
3/8			.3750	3.125	1.813		C14702	C14863
	V		.3770	3.250	1.875		C14703	—
	W		.3860	3.250	1.875		C14707	—
25/64			.3906	3.250	1.875		C14709	—
		10.0	.3937		89.00	43.00	C14815	C14771
	X		.3970	3.313	1.938		C14711	—
	Y		.4040	3.313	1.938		C14713	—
13/32			.4062	3.313	1.938		C14715	C14864
	Z		.4130	3.375	2.000		C14716	—
		10.5	.4134		89.00	43.00	C14816	C14788
27/64			.4219	3.375	2.000		C14718	—
		11.0	.4331		95.00	47.00	C14817	C14772
7/16			.4375	3.438	2.063		C14721	C14865
		11.5	.4528		95.00	47.00	C14832	C14773
29/64			.4531	3.563	2.125		C14724	—
15/32			.4688	3.625	2.125		C14726	C14867
		12.0	.4724		102.00	51.00	C14818	C14774
31/64			.4844	3.688	2.188		C14729	—
		12.5	.4921		102.00	51.00	C14819	C14775
1/2			.5000	3.750	2.250		C14731	C14866

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32				>45
Straw	★		★		★	★		★	★				
TiCN	☆		☆		☆	☆		☆	☆	☆	★	★	

☆ = Best Performance ★ = Acceptable

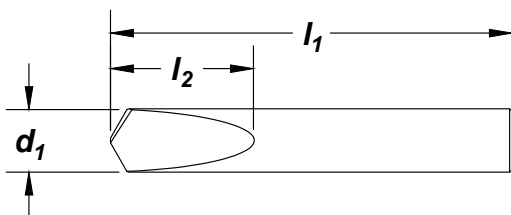
**Surface
Treatment**

Stub Length
Carbide


cutting diameter d₁		overall length l₁		flute length l₂	order number 1765
fraction	decimal				
1/32	.0313	1-1/2		3/16	C89705
1/16	.0625	1-1/2		5/16	C89706
3/32	.0938	1-1/2		3/8	C89707
1/8	.1250	1-1/2		7/16	C89708
5/32	.1562	2		15/32	C89709
3/16	.1875	2		9/16	C89710
7/32	.2188	2		19/32	C89711
1/4	.2500	2		11/16	C89712
9/32	.2812	2-1/2		3/4	C89714
5/16	.3125	2-1/2		7/8	C89715
11/32	.3438	2-1/2		15/16	C89716
3/8	.3750	2-1/2		1-1/16	C89713

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆	◆	☆	◆	◆			☆	◆			◆

☆ = Best Performance ◆ = Acceptable



Surface
Treatment

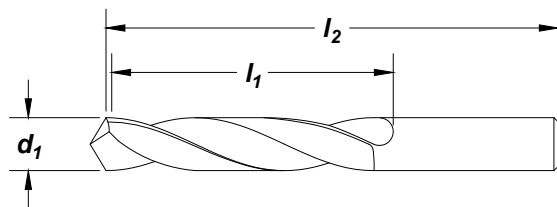

Stub Length

Carbide

cutting diameter d_1			overall length l_1	flute length l_2	order number 1767
frac	wire/let	decimal			
	60	.0400	1-1/2	3/8	C89675
	59	.0410	1-1/2	3/8	C89674
	58	.0420	1-1/2	3/8	C89673
	57	.0430	1-1/2	3/8	C89672
	56	.0465	1-1/2	3/8	C89671
	55	.0520	1-1/2	3/8	C89670
	54	.0550	1-1/2	3/8	C89669
	53	.0595	1-1/2	3/8	C89668
1/16		.0625	2	5/8	C89676
	52	.0635	2	5/8	C89667
	51	.0670	2	5/8	C89666
	50	.0700	2	5/8	C89665
	49	.0730	2	5/8	C89664
	48	.0760	2	5/8	C89663
5/64		.0781	2	5/8	C89677
	47	.0785	2	5/8	C89662
	46	.0810	2	5/8	C89661
	45	.0820	2	5/8	C89660
	44	.0860	2	5/8	C89659
	43	.0890	2	5/8	C89658
	42	.0935	2	5/8	C89657
3/32		.0938	2	5/8	C89678
	41	.0960	2	5/8	C89656
	40	.0980	2	5/8	C89655
	39	.0995	2	5/8	C89654
	38	.1015	2	5/8	C89653
	37	.1040	2	5/8	C89652
	36	.1065	2	5/8	C89651
7/64		.1094	2	5/8	C89679
	35	.1100	2	5/8	C89650
	34	.1110	2	5/8	C89649

cutting diameter d_1			overall length l_1	flute length l_2	order number 1767
frac	wire/let	decimal			
	33	.1130	2	5/8	C89648
	32	.1160	2	5/8	C89647
	31	.1200	2	5/8	C89646
1/8		.1250	2	5/8	C89680
	30	.1285	2	5/8	C89645
	29	.1360	2	5/8	C89644
9/64		.1406	2	5/8	C89681
	28	.1405	2	5/8	C89643
	27	.1440	2	5/8	C89642
	26	.1470	2	5/8	C89641
	25	.1495	2-1/2	3/4	C89640
	24	.1520	2-1/2	3/4	C89639
	23	.1540	2-1/2	3/4	C89638
5/32		.1562	2-1/2	3/4	C89682
	22	.1570	2-1/2	3/4	C89637
	21	.1590	2-1/2	3/4	C89636
	20	.1610	2-1/2	3/4	C89635
	19	.1660	2-1/2	3/4	C89634
	18	.1695	2-1/2	3/4	C89633
11/64		.1719	2-1/2	3/4	C89683
	17	.1730	2-1/2	3/4	C89632
	16	.1770	2-1/2	3/4	C89631
	15	.1800	2-1/2	3/4	C89630
	14	.1820	2-1/2	3/4	C89629
	13	.1850	2-1/2	3/4	C89628
3/16		.1875	2-1/2	3/4	C89684
	12	.1890	2-1/2	3/4	C89627
	11	.1910	2-1/2	3/4	C89626
	10	.1935	2-1/2	3/4	C89625
	9	.1960	2-1/2	3/4	C89624
	8	.1990	2-1/2	3/4	C89623

continued on next page

cutting diameter d ₁			overall length l ₁	flute length l ₂	order number 1767
frac	wire/let	decimal			
	7	.2010	2-1/2	3/4	C89622
13/64		.2031	2-1/2	3/4	C89685
	6	.2040	2-1/2	3/4	C89621
	5	.2055	2-1/2	3/4	C89620
	4	.2090	2-1/2	3/4	C89619
	3	.2130	2-1/2	1	C89618
7/32		.2188	2-1/2	1	C89686
	2	.2210	2-1/2	1	C89617
	1	.2280	2-1/2	1	C89616
15/64		.2344	2-1/2	1	C89687
1/4		.2500	2-1/2	1	C89688
17/64		.2656	2-1/2	1	C89689
9/32		.2812	2-1/2	1	C89690

cutting diameter d ₁			overall length l ₁	flute length l ₂	order number 1767
frac	wire/let	decimal			
19/64		.2969	2-3/4	1-1/4	C89691
5/16		.3125	2-3/4	1-1/4	C89692
21/64		.3281	2-3/4	1-1/4	C89693
11/32		.3438	3	1-1/4	C89694
23/64		.3594	3	1-1/4	C89695
3/8		.3750	3	1-1/4	C89696
25/64		.3906	3	1-1/4	C89697
13/32		.4062	3	1-1/4	C89698
27/64		.4219	3	1-1/4	C89699
7/16		.4375	3	1-1/4	C89700
29/64		.4531	3	1-1/4	C89701
15/32		.4688	3	1-1/4	C89702
31/64		.4844	3	1-1/4	C89703
1/2		.5000	3	1-1/4	C89704

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆	◆	☆	◆	◆		☆	☆	◆			◆
☆ = Best Performance ◆ = Acceptable													

General Purpose

Styles: 2002G, 2001G, 2002G-TC
Note

Operating parameters begin on page 121.

 ASME
B94.11M

 DIN
338

 PREMIUM
HSS


 118°



 Helix
Regular
21° to 34°


 Straight
Shank

 Surface
Treatment


 Bright


 Black
Oxide

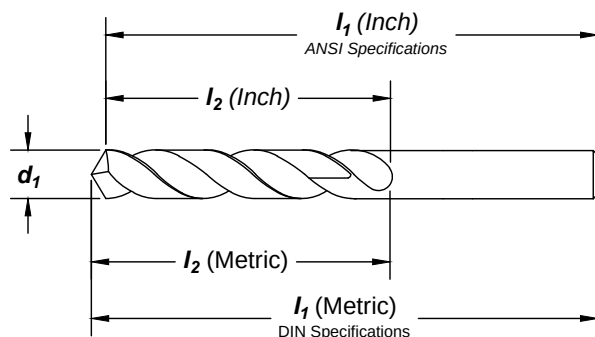
 TiCN

Feature:

General purpose jobber drill with improved geometry. Premium HSS grade for increased tool life.

drill diameter d₁			overall length I₁		flute length I₂		order number		
fraction	wire/letter	mm	decimal equiv.	in	mm	in	2002G bright	2001G black oxide	2002G-TC TiCN
		1.00	.0394		34.00	12.00	C72200	C71200	C73200
	60		.0400	1.625		.688	C72160	C71160	—
	59		.0410	1.625		.688	C72159	C71159	—
		1.05	.0413		34.00	12.00	—	C71201	—
	58		.0420	1.625		.688	C72158	C71158	—
	57		.0430	1.750		.750	C72157	C71157	—
		1.10	.0433		36.00	14.00	C72202	C71202	—
		1.15	.0453		36.00	14.00	—	C71203	—
	56		.0465	1.750		.750	C72156	C71156	—
3/64			.0469	1.750		.750	C72003	C71003	C73003
		1.20	.0472		38.00	16.00	C72204	C71204	—
		1.25	.0492		38.00	16.00	—	C71205	—
		1.30	.0512		38.00	16.00	C72206	C71206	—
	55		.0520	1.875		.875	C72155	C71155	—
		1.35	.0531		40.00	18.00	—	C71207	—
	54		.0550	1.875		.875	C72154	C71154	—
		1.40	.0551		40.00	18.00	C72208	C71208	—
		1.45	.0571		40.00	18.00	—	C71209	—
		1.50	.0591		40.00	18.00	C72210	C71210	C73210
	53		.0595	1.875		.875	C72153	C71153	—
		1.55	.0610		43.00	20.00	—	C71211	—
1/16			.0625	1.875		.875	C72004	C71004	C73004
		1.60	.0630		43.00	20.00	C72212	C71212	C73212
	52		.0635	1.875		.875	C72152	C71152	C73152
		1.65	.0650		43.00	20.00	—	C71213	—
		1.70	.0669		43.00	20.00	C72214	C71214	—
	51		.0670	2.000		1.000	C72151	C71151	C73151
		1.75	.0689		46.00	22.00	—	C71215	—
	50		.0700	2.000		1.000	C72150	C71150	C73150
		1.80	.0709		46.00	22.00	C72216	C71216	—
		1.85	.0728		46.00	22.00	—	C71217	—
	49		.0730	2.000		1.000	C72149	C71149	C73149
		1.90	.0748		46.00	22.00	C72218	C71218	—
	48		.0760	2.000		1.000	C72148	C71148	C73148
		1.95	.0767	1.929	49.00	.945 24.00	—	C71219	—

continued on next page

Styles: 2002G, 2001G, 2002G-TC (continued)
General Purpose

drill diameter			overall length		flute length		order number		
d1			decimal	l1	l2		2002G	2001G	2002G-TC
fraction	wire/letter	mm	equiv.	in	mm	in	bright	black oxide	TiCN
5/64			.0781	2.000	50.80	1.000	C72005	C71005	C73005
	47		.0785	2.000	50.80	1.000	C72147	C71147	C73147
		2.00	.0787	1.929	49.00	.945	C72220	C71220	C73220
		2.05	.0807	1.929	49.00	.945	—	C71221	—
	46		.0810	2.125		1.125	C72146	C71146	C73146
	45		.0820	2.125		1.125	C72145	C71145	C73145
		2.10	.0827		49.00		C72222	C71222	—
		2.15	.0846		53.00		—	C71223	—
	44		.0860	2.125		1.125	C72144	C71144	C73144
		2.20	.0866		53.00		C72224	C71224	—
		2.25	.0886		53.00		—	C71225	—
	43		.0890	2.250		1.250	C72143	C71143	C73143
		2.30	.0906		53.00		C72226	C71226	—
		2.35	.0925		53.00		—	C71227	—
	42		.0935	2.250		1.250	C72142	C71142	C73142
3/32			.0938	2.250		1.250	C72006	C71006	C73006
		2.40	.0945		57.00		C72228	C71228	C73228
	41		.0960	2.375		1.375	C72141	C71141	C73141
		2.45	.0964		57.00		—	C71229	—
	40		.0980	2.375		1.375	C72140	C71140	C73140
		2.50	.0984		57.00		C72230	C71230	C73230
	39		.0995	2.375		1.375	C72139	C71139	C73139
	38		.1015	2.500		1.438	C72138	C71138	C73138
		2.60	.1024		57.00		C72231	C71231	—
	37		.1040	2.500		1.438	C72137	C71137	C73137
		2.70	.1062		61.00		C72232	C71232	—
	36		.1065	2.500		1.438	C72136	C71136	C73136
7/64			.1094	2.625		1.500	C72007	C71007	C73007
	35		.1100	2.625		1.500	C72135	C71135	C73135
		2.80	.1102		61.00		C72233	C71233	—
	34		.1110	2.625		1.500	C72134	C71134	C73134
	33		.1130	2.625		1.500	C72133	C71133	C73133
		2.90	.1142		61.00		C72234	C71234	—
	32		.1160	2.750		1.625	C72132	C71132	C73132
		3.00	.1181		61.00		C72235	C71235	C73235
	31		.1200	2.750		1.625	C72131	C71131	C73131
		3.10	.1220		65.00		C72236	C71236	—
1/8			.1250	2.750		1.625	C72008	C71008	C73008
		3.20	.1260		66.00		C72237	C71237	C73237
	30		.1285	2.750		1.625	C72130	C71130	C73130
		3.30	.1299		67.00		C72238	C71238	C73238
		3.40	.1339		70.00		C72239	C71239	—
	29		.1360	2.875		1.750	C72129	C71129	C73129
		3.50	.1378		70.00		C72240	C71240	C73240
	28		.1405	2.875		1.750	C72128	C71128	C73128
9/64			.1406	2.875		1.750	C72009	C71009	C73009
		3.60	.1417		70.00		C72241	C71241	C73241
	27		.1440	3.000		1.875	C72127	C71127	C73127
		3.70	.1457		70.00		C72242	C71242	—
	26		.1470	3.000		1.875	C72126	C71126	C73126

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright												
	Black Oxide	★				★		★		★			
	TiCN	☆		☆		☆		☆		☆			

☆ = Best Performance ★ = Acceptable

General Purpose

Styles: 2002G, 2001G, 2002G-TC (continued)
Jobber Length
High Speed Steel

drill diameter			overall length		flute length		order number		
d ₁			l ₁		l ₂		2002G	2001G	2002G-TC
fraction	wire/letter	mm	in	mm	in	mm	bright	black oxide	TiCN
25		.1495	3.000		1.875		C72125	C71125	C73125
	3.80	.1496		75.00		43.00	C72243	C71243	-
24		.1520	3.125		2.000		C72124	C71124	C73124
	3.90	.1535		75.00		43.00	C72244	C71244	-
23		.1540	3.125		2.000		C72123	C71123	C73123
5/32		.1562	3.125		2.000		C72010	C71010	C73010
22		.1570	3.125		2.000		C72122	C71122	C73122
	4.00	.1575		75.00		43.00	C72245	C71245	C73245
21		.1590	3.250		2.125		C72121	C71121	C73121
20		.1610	3.250		2.125		C72120	C71120	C73120
	4.10	.1614		75.00		43.00	C72246	C71246	C73246
	4.20	.1654		75.00		43.00	C72247	C71247	C73247
19		.1660	3.250		2.125		C72119	C71119	C73119
	4.30	.1692		80.00		47.00	C72248	C71248	C73248
18		.1695	3.250		2.125		C72118	C71118	C73118
11/64		.1719	3.250		2.125		C72011	C71011	C73011
17		.1730	3.375		2.188		C72117	C71117	C73117
	4.40	.1732		80.00		47.00	C72249	C71249	-
16		.1770	3.375		2.188		C72116	C71116	C73116
	4.50	.1772		80.00		47.00	C72250	C71250	C73250
15		.1800	3.375		2.188		C72115	C71115	C73115
	4.60	.1811			1.850	47.00	C72251	C71251	-
14		.1820	3.375		2.188		C72114	C71114	C73114
13		.1850	3.500		2.313		C72113	C71113	C73113
	4.70	.1850		80.00		47.00	C72252	C71252	-
3/16		.1875	3.500		2.313		C72012	C71012	C73012
12		.1890	3.500		2.313		C72112	C71112	C73112
	4.80	.1890		86.00		52.00	C72253	C71253	C73253
11		.1910	3.500		2.313		C72111	C71111	C73111
	4.90	.1929		86.00		52.00	C72254	C71254	C73254
10		.1935	3.625		2.438		C72110	C71110	C73110
9		.1960	3.625		2.438		C72109	C71109	C73109
	5.00	.1969		86.00		52.00	C72255	C71255	C73255
8		.1990	3.625		2.438		C72108	C71108	C73108
	5.10	.2008		86.00		52.00	C72256	C71256	C73256
7		.2010	3.625		2.438		C72107	C71107	C73107
13/64		.2031	3.625		2.438		C72013	C71013	C73013
6		.2040	3.750		2.500		C72106	C71106	C73106
	5.20	.2047		86.00		52.00	C72257	C71257	C73257
5		.2055	3.750		2.500		C72105	C71105	C73105
4		.2090	3.750		2.500		C72104	C71104	C73104
	5.40	.2125		93.00		57.00	C72259	C71259	-
3		.2130	3.750		2.500		C72103	C71103	C73103
	5.50	.2165		93.00		57.00	C72260	C71260	C73260
7/32		.2188	3.750		2.500		C72014	C71014	C73014
	5.60	.2205		93.00		57.00	C72261	C71261	-
2		.2210	3.875		2.625		C72102	C71102	C73102
	5.70	.2244		93.00		57.00	C72262	C71262	-
1		.2280	3.875		2.625		C72101	C71101	C73101
	5.90	.2322		93.00		57.00	C72264	C71264	-
A		.2340	3.875		2.625		C72071	C71071	C73071
15/64		.2344	3.875		2.625		C72015	C71015	C73015
	6.00	.2362		93.00		57.00	C72265	C71265	C73265
B		.2380	4.000		2.750		C72072	C71072	C73072
	6.10	.2401		101.00		63.00	C72266	C71266	-
C		.2420	4.000		2.750		C72073	C71073	C73073
	6.20	.2440		101.00		63.00	C72267	C71267	-

continued on next page

Styles: 2002G, 2001G, 2002G-TC (continued)
General Purpose

drill diameter			overall length		flute length		order number		
d ₁			l ₁		l ₂		2002G	2001G	2002G-TC
fraction	wire/letter	mm	in	mm	in	mm	bright	black oxide	TiCN
1/4	D	6.30	4.000	101.00	2.750	63.00	C72074	C71074	C73074
							C72268	C71268	-
							C72016	C71016	C73016
1/4	E	6.40	4.000	101.00	2.750	63.00	C72269	C71269	-
		6.50	4.000	101.00	2.750	63.00	C72270	C71270	C73270
							C72076	C71076	C73075
1/4	F	6.60	4.125	101.00	2.875	63.00	C72271	C71271	-
							C72077	C71077	C73076
							C72272	C71272	-
17/64	G	6.70	4.125	101.00	2.875	63.00	C72017	C71017	C73017
							C72078	C71078	C73077
							C72273	C71273	C73273
17/64	H	6.80	4.125	109.00	2.875	69.00	C72274	C71274	-
		6.90	4.125	109.00	2.875	69.00	C72079	C71079	C73078
							C72275	C71275	C73275
9/32	I	7.00	4.125	109.00	2.875	69.00	C72080	C71080	C73079
							C72276	C71276	-
							C72018	C71018	C73018
9/32	J	7.10	4.250	109.00	2.938	69.00	C72081	C71081	C73080
							C72277	C71277	-
							C72278	C71278	-
9/32	K	7.20	4.250	109.00	2.938	69.00	C72082	C71082	C73081
		7.30	4.250	109.00	2.938	69.00	C72279	C71279	-
							C72083	C71083	C73082
19/64	L	7.40	4.375	109.00	3.063	69.00	C72280	C71280	C73280
							C72019	C71019	C73019
							C72084	C71084	C73083
19/64	N	7.70	4.375	117.00	3.063	75.00	C72282	C71282	-
		7.80	4.375	117.00	3.063	75.00	C72283	C71283	-
		7.90	4.375	117.00	3.063	75.00	C72284	C71284	-
5/16	O	8.00	4.500	117.00	3.188	75.00	C72020	C71020	C73020
							C72285	C71285	C73285
							C72085	C71085	C73084
5/16	P	8.10	4.500	117.00	3.188	75.00	C72286	C71286	-
		8.20	4.500	117.00	3.188	75.00	C72287	C71287	-
							C72086	C71086	C73085
21/64	Q	8.40	4.625	117.00	3.313	75.00	C72021	C71021	C73021
							C72289	C71289	-
							C72087	C71087	C73086
11/32	R	8.50	4.750	117.00	3.438	75.00	C72290	C71290	C73290
							C72088	C71088	C73087
		8.70	4.750	125.00	3.438	81.00	C72292	C71292	-
11/32	S	8.80	4.750	125.00	3.438	81.00	C72022	C71022	C73022
							C72293	C71293	-
							C72089	C71089	C73088
23/64	T	9.00	4.875	125.00	3.500	81.00	C72295	C71295	C73295
							C72090	C71090	C73089
							C72023	C71023	C73023
23/64		9.20	4.875	125.00	3.500	81.00	C72297	C71297	-

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright												
Black Oxide	★					★		★		★			
TiCN	☆			☆		☆		☆		☆			

★ = Best Performance ☆ = Acceptable

General Purpose

Styles: **2002G, 2001G, 2002G-TC** (continued)

Jobber Length

High Speed Steel

drill diameter			overall length		flute length		order number		
d ₁			l ₁		l ₂		2002G	2001G	2002G-TC
fraction	wire/letter	mm	in	mm	in	mm	bright	black oxide	TiCN
	U	9.30	.3661			81.00	C72298	C71298	—
			.3680	5.000	3.625		C72091	C71091	C73090
		9.40	.3700			81.00	C72299	C71299	—
3/8	V	9.50	.3740			81.00	C72300	C71300	C73300
			.3750	5.000	3.625		C72024	C71024	C73024
			.3770	5.000	3.625		C72092	C71092	C73091
	W	9.60	.3779			87.00	C72301	C71301	—
		9.70	.3817			87.00	C72302	C71302	—
		9.80	.3858			87.00	C72303	C71303	—
25/64	X		.3860	5.125	3.750		C72093	C71093	C73092
			.3906	5.125	3.750		C72025	C71025	C73025
		10.00	.3937			87.00	C72305	C71305	C73305
	Y		.3970			95.25	C72094	C71094	C73093
		10.20	.4016			87.00	C72306	C71306	C73306
			.4040	5.250	3.875		C72095	C71095	C73094
13/32	Z		.4062	5.250	3.875		C72026	C71026	C73026
			.4130	5.250	3.875		C72096	C71096	C73095
		10.50	.4134			87.00	C72308	C71308	C73308
27/64			.4219	5.375	3.938		C72027	C71027	C73027
		10.80	.4252			94.00	C72309	C71309	—
		11.00	.4331			94.00	C72310	C71310	C73310
7/16			.4375	5.500	4.063		C72028	C71028	C73028
		11.20	.4409			94.00	C72311	C71311	—
		11.50	.4527			94.00	C72312	C71312	C73312
29/64			.4531	5.625	4.188		C72029	C71029	C73029
15/32			.4688	5.750	4.313		C72030	C71030	C73030
		12.00	.4724			101.00	C72314	C71314	C73314
		12.20	.4803			101.00	C72315	C71315	—
		31/64	.4844	5.875	4.375		C72031	C71031	C73031
1/2		12.50	.4921			101.00	C72316	C71316	C73316
			.5000	6.000	4.500		C72032	C71032	C73032
		13.00	.5118			101.00	C72319	C71319	C73319
33/64			.5156	6.625	4.813		—	C71033	—
17/32			.5312	6.625	4.813		—	C71034	—
35/64		13.50	.5315			108.00	C72321	C71321	—
			.5469	6.625	4.813		—	C71035	—
		14.00	.5512			108.00	C72323	C71323	C73323
9/16			.5625	6.625	4.813		—	C71036	—
		14.50	.5709			114.00	C72325	C71325	—
		37/64	.5781	6.625	4.813		—	C71037	—
		15.00	.5906			114.00	C72327	C71327	C73327
		19/32	.5938	7.125	5.188		—	C71038	—
		39/64	.6094	7.125	5.188		—	C71039	—
5/8		15.50	.6102			120.00	C72329	C71329	—
			.6250	7.125	5.188		—	C71040	—
		16.00	.6299			120.00	C72331	C71331	C73331
41/64			.6406	7.125	5.188		—	C71041	—
		16.50	.6496			120.00	C72333	C71333	—
		21/32	.6562	7.125	5.188		—	C71042	—
43/64		17.00	.6693			120.00	C72335	C71335	C73335
			.6719	7.625	5.625		—	C71043	—
		11/16	.6875	7.625	5.625		—	C71044	—
		17.50	.6890			130.00	C72337	C71337	—

continued on next page

no. of pieces	size range	order number	
		2002G bright	2002G black oxide
15	1/16" through 1/2" x 1/3 2"	C72199	
29	1/16" through 1/2" x 1/64"	C72198	C72197
26	letter A through Z	C00939	
60	wire gauge #1 through #60	C00934	
115	1/16" through 1/2", letter A through Z, and wire gage #1 through #60	C01330	
25	1 mm through 13 mm x 0.5 mm	C72000	C71000
50	1 mm through 5.9 mm x 0.1 mm		C00960




115-Piece Set
#C01330



50-Piece Set
#C00690



60-Piece Set
#C00934



25-Piece Set
#C71000

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright												
	Black Oxide	★				★		★		★			
	TiCN	★		★		★		★		★			

★ = Best Performance

◆ = Acceptable

General Purpose


Styles: 2002, 2001
Note

Operating parameters begin on page 121.
All sizes feature uncleaned diameter.

ASME
B94.11M

DIN
338

HSS

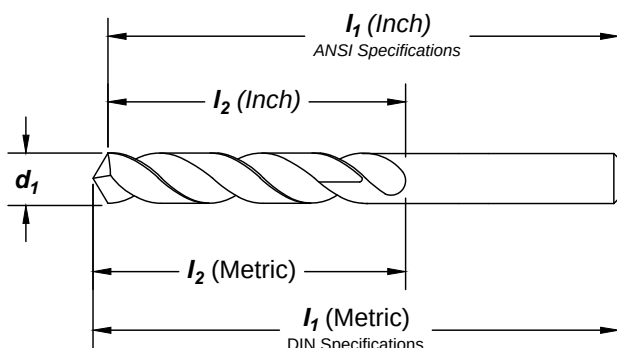Surface Treatment

Feature:

General purpose jobber drill for effective drilling in medium and softer materials.

drill diameter			decimal equiv.	overall length		flute length		order number	
fraction	d ₁ wire	mm		I ₁ in	I ₁ mm	I ₂ in	I ₂ mm	2002 Bright	2001 black oxide
80			.0135	.750		.125		C01799	C01012
		0.35	.0138		19.00		3.00	—	C01013
			.0145	.750		.188		C01801	C01014
79		0.38	.0150		19.00		4.00	—	C01015
			.0156	.750		.188		C01803	C01016
		0.40	.0157		20.00		5.00	—	C01017
1/64			.0160	.875		.188		C01805	C01018
		0.42	.0165		20.00		5.00	—	C01019
		0.45	.0177		20.00		5.00	—	C01020
78			.0180	.875		.188		C01808	C01021
		0.48	.0189		20.00		5.00	—	C01022
		0.50	.0197		22.00		6.00	—	C01023
77			.0200	.875		.188		C01811	C01024
			.0210	1.000		.250		C01812	C01025
		0.55	.0217		24.00		7.00	—	C01026
76			.0225	1.000		.250		C01814	C01027
		0.60	.0236		24.00		7.00	—	C01028
			.0240	1.125		.313		C01816	C01029
75			.0250	1.125		.313		C01817	C01030
		0.65	.0256		26.00		8.00	—	C01031
			.0260	1.250		.375		C01819	C01032
74		0.70	.0276		28.00		9.00	—	C01033
			.0280	1.250		.375		C01821	C01034
			.0292	1.375		.500		C01822	C01035
73		0.75	.0295		28.00		9.00	—	C01036
			.0310	1.375		.500		C01824	C01037
			.0312	1.375		.500		C01825	C01038
1/32		0.80	.0315		30.00		10.00	—	C01039
			.0320	1.375		.500		C01827	C01040
			.0330	1.375		.500		C01828	C01041
72		0.85	.0335		30.00		10.00	—	C01042
			.03 50	1.500		.625		C01830	C01043
		0.90	.0354		32.00		11.00	—	C01044

continued on next page

Styles: 2002, 2001 (continued)
General Purpose

drill diameter			overall length		flute length		order number	
fraction	d ₁ wire	mm	decimal equiv.	I ₁ in	mm	I ₂ in	mm	
	64		.0360	1.500		.625		2002 Bright
	63		.0370	1.500		.625		2001 black oxide
		0.95	.0374		32.00		11.00	C01832
								C01833
	62		.0380	1.500		.625		–
	61		.0390	1.500		.688		C01835
		5.30	.2087		95.00		64.00	C01836
		5.80	.2283		98.00		67.00	–
								C01045
								C01046
								C01047
								C01048
								C01049
								C01181
								C01192

Jobber Length
High Speed Steel
SET
Style: 2002
General Purpose


no. of pieces	surface treatment	size range	order number
20	Bright	#61-#80	2002 C00937


TECH TIPS
Bright versus Surface Treated Tools

- Bright (untreated) series are used in non-ferrous materials.
- Black oxide drills provide better wear life in ferrous materials.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	★		★				★		☆			
	Black Oxide	☆		☆				☆					

☆ = Best Performance

★ = Acceptable

Low Helix

Style: **2020**

Note

Operating parameters begin on page 121.


ASME
B94.11M

HSS



Surface
Treatment

Bright

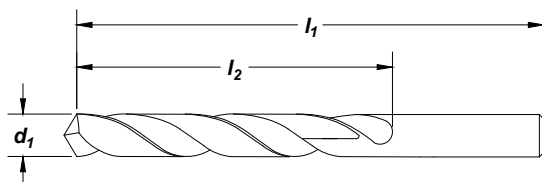

Feature:

Slower helix aids chip removal in horizontal application.

drill diameter

d ₁		decimal	overall length	flute length	order no.
frac	wire	equiv.	l ₁ (in)	l ₂ (in)	2020
	60	.0400	1.625	.688	C03457
	59	.0410	1.625	.688	C03458
	58	.0420	1.625	.688	C03460
	57	.0430	1.750	.750	C03461
	56	.0465	1.750	.750	C03464
	55	.0520	1.875	.875	C03469
	54	.0550	1.875	.875	C03471
	53	.0595	1.875	.875	C03475
1/16		.0625	1.875	.875	C03477
	52	.0635	1.875	.875	C03479
	51	.0670	2.000	1.000	C03482
	50	.0700	2.000	1.000	C03484
	49	.0730	2.000	1.000	C03487
	48	.0760	2.000	1.000	C03489
5/64		.0781	2.000	1.000	C03491
	47	.0785	2.000	1.000	C03492
	46	.0810	2.125	1.125	C03495
	45	.0820	2.125	1.125	C03496
	44	.0860	2.125	1.125	C03499
	43	.0890	2.250	1.250	C03502
	42	.0935	2.250	1.250	C03505
3/32		.0938	2.250	1.250	C03506
	41	.0960	2.375	1.375	C03508
	40	.0980	2.375	1.375	C03510
	39	.0995	2.375	1.375	C03512
	38	.1015	2.500	1.438	C03513
	37	.1040	2.500	1.438	C03515
	36	.1065	2.500	1.438	C03517
7/64		.1094	2.625	1.500	C03519
	35	.1100	2.625	1.500	C03520
	34	.1110	2.625	1.500	C03522
	33	.1130	2.625	1.500	C03523
	32	.1160	2.750	1.625	C03525
	31	.1200	2.750	1.625	C03527

drill diameter

d1		decimal	overall length	flute length	order no.
frac	wire	equiv.	l1 (in)	l2 (in)	2020
1/8		.1250	2.750	1.625	C03529
	30	.1285	2.750	1.625	C03532
	29	.1360	2.875	1.750	C03535
	28	.1405	2.875	1.750	C03537
9/64		.1406	2.875	1.750	C03538
	27	.1440	3.000	1.875	C03540
	26	.1470	3.000	1.875	C03542
	25	.1495	3.000	1.875	C03544
	24	.1520	3.125	2.000	C03546
	23	.1540	3.125	2.000	C03548
5/32		.1562	3.125	2.000	C03549
	22	.1570	3.125	2.000	C03550
	21	.1590	3.250	2.125	C03552
	20	.1610	3.250	2.125	C03553
	19	.1660	3.250	2.125	C03556
	18	.1695	3.250	2.125	C03559
11/64		.1719	3.250	2.125	C03560
	17	.1730	3.375	2.188	C03561
	16	.1770	3.375	2.188	C03563
	15	.1800	3.375	2.188	C03565
	14	.1820	3.375	2.188	C03567
	13	.1850	3.500	2.313	C03568
3/16		.1875	3.500	2.313	C03571
	12	.1890	3.500	2.313	C03572
	11	.1910	3.500	2.313	C03574
	10	.1935	3.625	2.438	C03576
	9	.1960	3.625	2.438	C03577
	8	.1990	3.625	2.438	C03579
	7	.2010	3.625	2.438	C03581
13/64		.2031	3.625	2.438	C03582
	6	.2040	3.750	2.500	C03583
	5	.2055	3.750	2.500	C03585
	4	.2090	3.750	2.500	C03588
	3	.2130	3.750	2.500	C03590

continued on next page

Style: 2020 (continued)
Low Helix
drill diameter

d₁		decimal	overall length	flute length	order no.
frac	wire	equiv.	l₁ (in)	l₂ (in)	2020
7/32		.2188	3.750	2.500	C03592
	2	.2210	3.875	2.625	C03594
	1	.2280	3.875	2.625	C03597
15/64		.2344	3.875	2.625	C03601
1/4		.2500	4.000	2.750	C03610
17/64		.2656	4.125	2.875	C03618
9/32		.2812	4.250	2.938	C03632
19/64		.2969	4.375	3.063	C03636
5/16		.3125	4.500	3.188	C03643
21/64		.3281	4.625	3.313	C03651

drill diameter

d₁		decimal	overall length	flute length	order no.
frac	wire	equiv.	l₁ (in)	l₂ (in)	2020
11/32		.3438	4.750	3.438	C03658
3/8		.3750	5.000	3.625	C03673
25/64		.3906	5.125	3.750	C03681
13/32		.4062	5.250	3.875	C03686
27/64		.4219	5.375	3.938	C03689
7/16		.4375	5.500	4.063	C03692
29/64		.4531	5.625	4.188	C03695
15/32		.4688	5.750	4.313	C03697
1/2		.5000	6.000	4.500	C03702

Jobber Length
High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆								☆			

☆ = Best Performance ◆ = Acceptable

High Helix

Style: **2012**

Note
Operating parameters begin on page 121.


ASME
B94.11M

HSS



Surface
Treatment

Bright

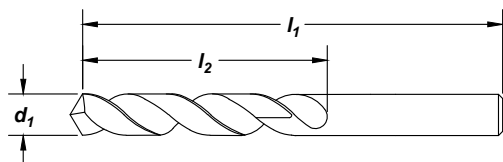

Feature:

Higher helix for improved chip lifting in softer materials.

drill diameter		decimal equiv.	overall length		flute length	order no.
d ₁			I ₁ (in)	I ₂ (in)		
fraction	wire					2012
80		.0135	.750	.188		C02881
79		.0145	.750	.188		C02883
78		.0160	.875	.188		C02887
77		.0180	.875	.188		C02890
76		.0200	.875	.188		C02893
75		.0210	1.000	.250		C02894
74		.0225	1.000	.250		C02896
73		.0240	1.125	.313		C02898
72		.0250	1.125	.313		C02899
71		.0260	1.250	.375		C02901
70		.0280	1.250	.375		C02903
69		.0292	1.375	.500		C02904
68		.0310	1.375	.500		C02906
1/32		.0312	1.375	.500		C02907
67		.0320	1.375	.500		C02909
66		.0330	1.375	.500		C02910
65		.0350	1.500	.625		C02912
64		.0360	1.500	.625		C02914
63		.0370	1.500	.625		C02915
62		.0380	1.500	.625		C02917
61		.0390	1.625	.688		C02918
60		.0400	1.625	.688		C02920
59		.0410	1.625	.688		C02921
58		.0420	1.625	.688		C02923
57		.0430	1.750	.750		C02924
56		.0465	1.750	.750		C02927
3/64		.0469	1.750	.750		C02928
55		.0520	1.875	.875		C02932
54		.0550	1.875	.875		C02934
53		.0595	1.875	.875		C02938

drill diameter		decimal equiv.	overall length		flute length	order no.
d ₁			I ₁ (in)	I ₂ (in)		
fraction	wire					2012
1/16		.0625	1.875	.875		C02940
52		.0635	1.875	.875		C02942
51		.0670	2.000	1.000		C02945
50		.0700	2.000	1.000		C02947
49		.0730	2.000	1.000		C02950
48		.0760	2.000	1.000		C02952
5/64		.0781	2.000	1.000		C02954
47		.0785	2.000	1.000		C02955
46		.0810	2.125	1.125		C02958
45		.0820	2.125	1.125		C02959
44		.0860	2.125	1.125		C02962
43		.0890	2.250	1.250		C02965
42		.0935	2.250	1.250		C02968
3/32		.0938	2.250	1.250		C02969
41		.0960	2.375	1.375		C02971
40		.0980	2.375	1.375		C02973
39		.0995	2.375	1.375		C02975
38		.1015	2.500	1.438		C02976
37		.1040	2.500	1.438		C02978
36		.1065	2.500	1.438		C02980
7/64		.1094	2.625	1.500		C02982
35		.1100	2.625	1.500		C02983
34		.1110	2.625	1.500		C02985
33		.1130	2.625	1.500		C02986
32		.1160	2.750	1.625		C02988
31		.1200	2.750	1.625		C02990
1/8		.1250	2.750	1.625		C02992
30		.1285	2.750	1.625		C02995
29		.1360	2.875	1.750		C02998
28		.1405	2.875	1.750		C03000

continued on next page

Style: 2012 (continued)
High Helix

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order no. 2012
d ₁ fraction	wire				
9/64		.1406	2.875	1.750	C03001
27		.1440	3.000	1.875	C03003
26		.1470	3.000	1.875	C03005
25		.1495	3.000	1.875	C03007
24		.1520	3.125	2.000	C03009
23		.1540	3.125	2.000	C03011
5/32		.1562	3.125	2.000	C03012
22		.1570	3.125	2.000	C03013
21		.1590	3.250	2.125	C03015
20		.1610	3.250	2.125	C03016
19		.1660	3.250	2.125	C03019
18		.1695	3.250	2.125	C03022
11/64		.1719	3.250	2.125	C03023
17		.1730	3.375	2.188	C03024
16		.1770	3.375	2.188	C03026
15		.1800	3.375	2.188	C03028
14		.1820	3.375	2.188	C03030
13		.1850	3.500	2.313	C03031
3/16		.1875	3.500	2.313	C03034
12		.1890	3.500	2.313	C03035
11		.1910	3.500	2.313	C03037
10		.1935	3.625	2.438	C03039
9		.1960	3.625	2.438	C03040
8		.1990	3.625	2.438	C03042
7		.2010	3.625	2.438	C03044
13/64		.2031	3.625	2.438	C03045
6		.2040	3.750	2.500	C03046
5		.2055	3.750	2.500	C03048
4		.2090	3.750	2.500	C03051
3		.2130	3.750	2.500	C03053
7/32		.2188	3.750	2.500	C03055
2		.2210	3.875	2.625	C03057
1		.2280	3.875	2.625	C03060
A		.2340	3.875	2.625	C03063
15/64		.2344	3.875	2.625	C03064
B		.2380	4.000	2.750	C03066
C		.2420	4.000	2.750	C03068
D		.2460	4.000	2.750	C03070
1/4		.2500	4.000	2.750	C03073
F		.2570	4.125	2.875	C03077

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order no. 2012
d ₁ fraction	wire				
G		.2610	4.125	2.875	C03079
17/64		.2656	4.125	2.875	C03081
H		.2660	4.125	2.875	C03083
I		.2720	4.125	2.875	C03086
J		.2770	4.125	2.875	C03088
L		.2900	4.250	2.938	C03094
9/32		.2812	4.250	2.938	C03095
M		.2950	4.375	3.063	C03097
19/64		.2969	4.375	3.063	C03099
N		.3020	4.375	3.063	C03101
5/16		.3125	4.500	3.188	C03106
O		.3160	5.750	3.188	C03108
P		.3230	4.625	3.313	C03111
21/64		.3281	4.625	3.313	C03114
Q		.3320	4.750	3.438	C03116
R		.3390	4.750	3.438	C03119
11/32		.3438	4.750	3.438	C03121
S		.3480	4.875	3.500	C03124
T		.3580	4.875	3.500	C03127
23/64		.3594	4.875	3.500	C03129
U		.3680	5.000	3.625	C03133
3/8		.3750	5.000	3.625	C03136
V		.3770	5.000	3.625	C03137
W		.3860	5.125	3.750	C03142
25/64		.3906	5.125	3.750	C03144
X		.3970	5.125	3.750	C03146
Y		.4040	5.250	3.875	C03148
13/32		.4062	5.250	3.875	C03149
Z		.4130	5.250	3.875	C03150
27/64		.4219	5.375	3.938	C03152
7/16		.4375	5.500	4.063	C03155
29/64		.4531	5.625	4.188	C03158
15/32		.4688	5.750	4.313	C03160
31/64		.4844	5.875	4.375	C03163
1/2		.5000	6.000	4.500	C03165

Jobber Length
High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆								☆			

☆ = Best Performance ◆ = Acceptable

Parabolic


Styles: 2065, 2065-TN

Note

Operating parameters begin on page 121.
Adjust the parameters as follows:
double the given feed rate.

ASME
B94.11M

HSS

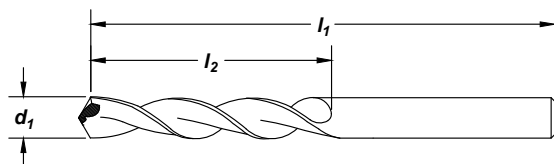
Surface
Treatment


Feature:

Excels in deep hole drilling without pecking in softer, free machining materials. Drill up to 10x diameter without pecking.

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number	
fraction	d ₁ wire				2065 Bright	2065-TN TiN
1/16		.0625	1.875	.875	C16029	C03705
	52	.0635	1.875	.875	C16219	—
	51	.0670	2.000	1.000	C16218	—
	50	.0700	2.000	1.000	—	C03708
	49	.0730	2.000	1.000	C16216	—
5/64		.0781	2.000	1.000	C16030	C03711
	47	.0785	2.000	1.000	C16214	—
	45	.0820	2.125	1.125	C16212	—
	43	.0890	2.250	1.250	C16210	—
	42	.0935	2.250	1.250	C16209	—
3/32		.0938	2.250	1.250	C16031	C03718
	41	.0960	2.375	1.375	C16208	—
	40	.0980	2.375	1.375	C16207	C03720
	39	.0995	2.375	1.375	C16206	—
	38	.1015	2.500	1.438	C16205	C03722
	36	.1065	2.500	1.438	C16203	C03724
7/64		.1094	2.625	1.500	C16032	C03725
	33	.1130	2.625	1.500	C16200	C03728
	32	.1160	2.750	1.625	C16199	—
	31	.1200	2.750	1.625	C16198	C03730
1/8		.1250	2.750	1.625	C16033	C03731
	30	.1285	2.750	1.625	C16197	C03732
	29	.1360	2.875	1.750	C16196	C03733
	28	.1405	2.875	1.750	C16195	—
9/64		.1406	2.875	1.750	C16034	—
	27	.1440	3.000	1.875	C16194	—
	26	.1470	3.000	1.875	C16193	—
	25	.1495	3.000	1.875	C16192	C03738
5/32		.1562	3.125	2.000	C16035	C03741
	22	.1570	3.125	2.000	C16189	C03742
	21	.1590	3.500	2.313	C16188	C03743
	20	.1610	3.250	2.125	C16187	—
	19	.1695	3.250	2.125	C16186	C03745
11/64		.1719	3.250	2.125	C16036	C03747

continued on next page

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number	
fraction	d ₁ wire				2065 Bright	2065-TN TiN
	17	.1730	3.375	2.188	C16184	—
	16	.1770	3.375	2.188	C16183	—
	15	.1800	3.375	2.188	—	C03750
	14	.1820	3.375	2.188	C16181	C03751
	13	.1850	3.500	2.313	C16180	C03752
3/16		.1875	3.500	2.313	C16037	C03753
	12	.1890	3.500	2.313	C16179	—
	11	.1910	3.500	2.313	C16178	—
	10	.1935	3.625	2.438	C16177	C03756
	9	.1960	3.625	2.438	C16176	—
	8	.1990	3.625	2.438	C16175	C03758
	7	.2010	3.625	2.438	C16174	—
13/64		.2031	3.625	2.438	C16038	C03760
	6	.2040	3.750	2.500	C16173	C03761
	5	.2055	3.750	2.500	C16172	C03762
	4	.2090	3.750	2.500	C16171	—
	3	.2130	3.750	2.500	C16170	C03764
7/32		.2188	3.750	2.500	C16039	C03765
	2	.2210	3.875	2.625	C16169	—
	1	.2280	3.875	2.625	C16168	—
15/64		.2344	3.875	2.625	C16040	—
1/4	E	.2500	4.000	2.750	C16041	C03773
17/64		.2656	4.125	2.875	C16042	C03776
9/32		.2812	4.250	2.938	C16043	C03781
19/64		.2969	4.375	3.063	C16044	C03784
5/16		.3125	4.500	3.188	C16045	C03786
21/64		.3281	4.625	3.313	C16046	—
11/32		.3438	4.750	3.438	C16047	—
23/64		.3594	4.875	3.500	C16048	—
3/8		.3750	5.000	3.625	C16049	—
25/64		.3906	5.125	3.750	C16050	—
13/32		.4062	5.250	3.875	C16051	C03801
27/64		.4219	5.375	3.938	C16052	—
7/16		.4375	5.500	4.063	C16053	C03804
29/64		.4531	5.625	4.188	C16054	—
15/32		.4688	5.750	4.313	C16055	C03806
31/64		.4844	5.875	4.375	C16056	C03807
1/2		.5000	6.000	4.500	C16057	—

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	◆		◆		◆				☆			
	TiN	☆		☆		☆							

☆ = Best Performance ◆ = Acceptable

Note
Operating parameters begin on page 121.


ASME
B94.11M

DIN
338

M42
Cobalt



Surface
Treatment

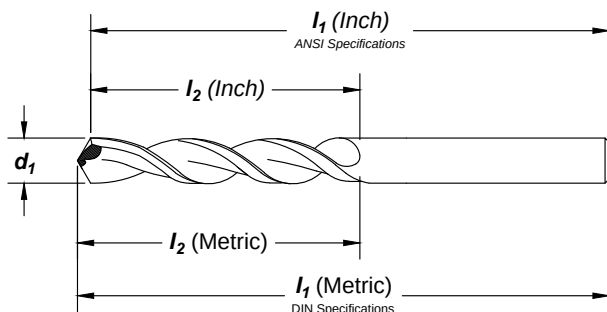

Feature:

Effective deep hole drilling in a wide array of materials. Available coating for extended tool life and productivity. Up to 7x diameter drilling without pecking.

drill diameter			overall length		flute length		order number				
d ₁		decimal	l ₁		l ₂		2075	2075-TN	2075-TC	2075-TA	
frac	wire/let	mm	equiv.	in	mm	in	mm	straw oxide	TiN	TiCN	TiAlN
		*1.50	.0591		40.00		18.00	C16584	C16696	—	C11360
		*1.55	.0610		43.00		20.00	C15540	—	—	—
1/16			.0625	1.875		0.875		C16555	C16667	C16942	C16972
		1.60	.0630		43.00		20.00	C15541	—	—	C11361
	52		.0635	1.875		0.875		C16554	C16666	—	C11452
		1.65	.0650		43.00		20.00	C15542	—	—	—
	51		.0670	2.000		1.000		C16553	C16665	—	C11451
		1.75	.0689		46.00		22.00	C15543	—	—	—
	50		.0700	2.000		1.000		C16552	C16664	—	C11450
		1.80	.0709		46.00		22.00	C15544	—	—	—
	49		.0730	2.000		1.000		C16551	C16663	—	C11449
		1.90	.0748		46.00		22.00	C15545	—	—	—
	48		.0760	2.000		1.000		C16550	C16661	—	C11448
5/64			.0781	2.000		1.000		C16556	C16668	C16943	C16973
	47		.0785	2.000		1.000		C16549	C16660	—	C11447
		2.00	.0787		49.00		24.00	C16585	C16697	—	C11362
		2.05	.0807		49.00		24.00	C15546	—	—	—
	46		.0810	2.125		1.125		C16548	C16659	—	C11446
	45		.0820	2.125		1.125		C16547	C16658	—	C11445
		2.10	.0827		49.00		24.00	C15547	—	—	—
		2.15	.0846		53.00		27.00	C15548	—	—	—
	44		.0860	2.125		1.125		C16546	C16657	—	C11444
		2.20	.0866		53.00		27.00	C15549	—	—	—
		2.25	.0886		53.00		27.00	C15550	—	—	—
	43		.0890	2.250		1.250		C16545	C16656	C16944	C16974
		2.30	.0906		53.00		27.00	C15551	C16455	—	—
		2.35	.0925		53.00		27.00	C15552	—	—	—
	42		.0935	2.250		1.250		C16544	C16655	—	C11442
3/32			.0938	2.250	57.15	1.250	31.75	C16557	C16669	C16945	C16975
		2.40	.0945		57.00		30.00	C15553	—	—	—
	41		.0960	2.375		1.375		C16543	C16654	C16946	C16976
	40		.0980	2.375		1.375		C16542	C16652	C16947	C16977
		2.50	.0984		57.00		30.00	C16586	C16698	—	C11363
	39		.0995	2.375		1.375		C16541	C16651	C16948	C16978
	38		.1015	2.500		1.438		C16540	C16650	—	C11438
		2.60	.1024		57.00		30.00	C15554	—	—	—
	37		.1040	2.500		1.438		C16539	C16649	—	C11437
	36		.1065	2.500		1.438		C16538	C16648	C16949	C16979

*Not split point.

continued on next page

drill diameter			overall length		flute length		order number			
d ₁			decimal	l ₁	l ₂		2075	2075-TN	2075-TC	2075-TA
frac	wire/let	mm	equiv.	in	mm	in	straw oxide	TiN	TiCN	TiAlN
7/64			.1094	2.625		1.500	C16558	C16670	C16950	C16980
	35		.1100	2.625		1.500	C16537	C16647	—	C11435
		2.80	.1102		61.00	33.00	C15555	—	—	C11364
	34		.1110	2.625		1.500	C16536	C16646	—	C11434
	33		.1130	2.625		1.500	C16535	C16645	—	C11433
		2.90	.1142		61.00	33.00	C15556	—	—	C11365
	32		.1160	2.750		1.625	C16534	C16644	—	C11432
		3.00	.1181		61.00	33.00	C16587	C16699	—	C11366
	31		.1200	2.750		1.625	C16533	C16643	—	C11431
		3.10	.1220		65.00	36.00	C15557	C16456	—	—
1/8			.1250	2.750		1.625	C16559	C16671	C16951	C16981
		3.20	.1260		65.00	36.00	C15558	C16457	—	—
	30		.1285	2.750		1.625	C16532	C16642	C16952	C16982
		3.30	.1299		65.00	36.00	C15559	—	—	C11367
		3.40	.1339		70.00	39.00	C15560	—	—	—
	29		.1360	2.875		1.750	C16531	C16641	C16953	C16983
		3.50	.1378		70.00	39.00	C16588	C16700	—	C11368
	28		.1405	2.875		1.750	C16530	C16640	—	C11428
9/64			.1406	2.875		1.750	C16560	C16672	—	C11400
	27		.1440	3.000		1.875	C16529	C16639	—	C11427
		3.70	.1457		70.00	39.00	C15561	—	—	C11369
	26		.1470	3.000		1.875	C16528	C16638	—	C11426
	25		.1495	3.000		1.875	C16527	C16637	—	C11425
	24		.1520	3.125		2.000	C16526	C16636	—	C11424
	23		.1540	3.125		2.000	C16525	C16635	—	C11423
5/32			.1562	3.125		2.000	C16561	C16673	C16954	C16984
	22		.1570	3.125		2.000	C16524	C16634	—	C11422
		4.00	.1575		75.00	43.00	C16589	C16701	—	C11370
	21		.1590	3.500		2.313	C16523	C16633	C16955	C16985
	20		.1610	3.250		2.125	C16522	C16632	—	C11420
		4.10	.1614		75.00	43.00	C15562	—	—	—
		4.20	.1654		75.00	43.00	C15563	—	—	C11371
	19		.1660	3.250		2.125	C16521	C16631	—	C11419
		4.30	.1693		80.00	47.00	C15580	—	—	—
	18		.1695	3.250		2.125	C16520	C16630	—	C11418
11/64			.1719	3.250		2.125	C16562	C16674	—	C11404
	17		.1730	3.375		2.188	C16519	C16629	—	C11417
		4.40	.1732		80.00	47.00	C15581	—	—	C11372
	16		.1770	3.375		2.188	C16518	C16628	—	C11416
		4.50	.1772		80.00	47.00	C16590	C16702	—	C11373
	15		.1800	3.375		2.188	C16517	C16626	—	C11415
	14		.1820	3.375		2.188	C16516	C16625	—	C11414
	13		.1850	3.500		2.313	C16515	C16624	—	C11413
3/16			.1875	3.500		2.313	C16563	C16675	C16956	C16986
		4.80	.1890		86.00	52.00	C15564	—	—	—
	12		.1890	3.500		2.313	C16514	C16623	—	C11412
	11		.1910	3.500		2.313	C16513	C16622	—	C11411
	10		.1935	3.625		2.438	C16512	C16621	—	C11410
	9		.1960	3.625		2.438	C16511	C16620	—	C11409
		5.00	.1969		86.00	52.00	C16591	C16703	—	C11374
	8		.1990	3.625		2.438	C16510	C16619	—	C11408

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	TiN	★		★									
	TiCN	☆		☆		★	★	★	★	☆			
	TiAlN					☆	☆	☆	☆				

☆ = Best Performance ★ = Acceptable

drill diameter			overall length		flute length		order number			
frac	wire/let	d ₁ mm	decimal equiv.	I ₁ in	I ₂ mm	I ₂ in	2075 straw oxide	2075-TN TiN	2075-TC TiCN	2075-TA TiAlN
13/64	7	5.10	.2008		86.00		C15565	—	—	—
			.2010	3.625		2.438	C16509	C16618	C16957	C16987
			.2031	3.625		2.438	C16564	C16676	C16958	C16988
	6		.2040	3.750		2.500	C16508	C16617	C16959	C16989
	5	5.20	.2047		86.00		C16592	C16704	—	—
			.2055	3.750		2.500	C16507	C16616	—	C11405
			.2090	3.750		2.500	C16506	C16615	C16960	C16990
	3		.2130	3.750		2.500	C16505	C16614	—	C11403
7/32		5.50	.2165		93.00		C16593	C16705	—	C11375
			.2188	3.750		2.500	C16565	C16677	C16961	C16991
		5.60	.2205		93.00		C16594	C16706	—	—
	2		.2210	3.875		2.625	C16504	C16613	—	C11402
		5.70	.2244		93.00		C15566	—	—	—
			.2280	3.875		2.625	C16503	C16612	—	C11401
		5.80	.2283		93.00		C15582	—	—	C11376
	A		.2340	3.875		2.625	C15650	—	C16430	—
15/64			.2344	3.875		2.625	C16566	C16678	C16962	C16992
		6.00	.2362		93.00		C16595	C16707	—	C11377
			.2380	4.000		2.750	C15651	—	C16431	—
	B		.2420	4.000		2.750	C15652	—	C16432	—
1/4			.2460	4.000		2.750	C15653	—	C16433	—
			.2500	4.000		2.750	C16567	C16679	C16963	C16993
		6.40	.2520		101.00		C15567	—	—	—
		6.50	.2559		101.00		C16596	C16708	—	C11378
	F		.2570	4.125		2.875	C15654	—	C16434	—
			.2598		101.00		C15568	—	—	—
		6.60	.2598		101.00		C15655	—	C16435	—
	G		.2610	4.125		2.875	C15656	—	—	—
17/64		6.70	.2638		101.00		C15569	—	—	—
			.2656	4.125		2.875	C16568	C16680	C16964	C16994
			.2660	4.125		2.875	C15656	—	C16436	—
	H		.2677		109.00		C16597	C16709	—	C11379
	I	7.00	.2720	4.125		2.875	C15657	—	C16437	—
			.2756		109.00		C16598	C16710	C16965	C16995
			.2770	4.125		2.875	C15658	—	C16438	—
	K		.2810	4.250		2.938	C15659	—	C16439	—
9/32			.2812	4.250		2.938	C16569	C16681	C16966	C16996
		7.20	.2835		109.00		C15570	—	—	—
			.2900	4.250		2.938	C15660	—	C16440	—
		7.40	.2913		109.00		C15571	—	—	—
	M		.2950	4.375	111.13	3.063	C15661	—	C16441	—
		7.50	.2953		109.00		C16599	C16711	—	C11380
			.2969	4.375		3.063	C16570	C16682	—	—
	N		.3020	4.375		3.063	C15662	—	C16442	—
5/16			.3125	4.500		3.188	C16571	C16683	C16967	C16997
		8.00	.3150		117.00		C16600	C16712	—	C11381
			.3160	4.500		3.188	C15663	—	C16443	—
		8.10	.3189		117.00		C15572	—	—	—
21/64		8.20	.3228		117.00		C16601	C16713	—	—
			.3230	4.625		3.313	C15664	—	C16444	—
			.3281	4.625		3.313	C16572	C16684	—	—
	Q		.3320	4.750		3.438	C15665	—	C16445	—
		8.50	.3346		117.00		C16602	C16714	—	C11382
		8.60	.3386		125.00		C16603	C16715	—	—
			.3390	4.750		3.438	C15666	—	C16446	—
	R		.3425		125.00		C15573	—	—	—
11/32			.3438	4.750		3.438	C16573	C16685	C16968	C16998
			.3480	4.875		3.500	C15667	—	C16447	—
		9.00	.3543		125.00		C16604	C16716	—	C11383
	T		.3580	4.875		3.500	C15668	—	C16448	—

continued on next page

Styles: **2075, 2075-TN, 2075-TC, 2075-TA** (cont'd)

Wide Land Parabolic
Q-Cobalt™

Jobber Length

Cobalt

drill diameter			overall length		flute length		order number			
d ₁			l ₂		l ₁		2075	2075-TN	2075-TC	2075-TA
frac	wire/let	mm	decimal equiv.	in	mm	in	straw oxide	TiN	TiCN	TiAlN
23/64			.3594	4.875		3.500	C16574	C16686	—	—
	U		.3680	5.000		3.625	C15669	—	C16449	—
		9.50	.3740		125.00	81.00	C16605	C16717	—	—
3/8			.3750	5.000		3.625	C16575	C16687	C16969	C16999
	V		.3770	5.000		3.625	C15670	—	C16450	—
	W		.3860	5.125		3.750	C15671	—	C16451	—
25/64			.3906	5.125		3.750	C16576	C16688	—	—
		10.00	.3937		133.00	87.00	C16606	C16718	—	C11384
	X		.3970	5.125		3.750	C15672	—	C16452	—
		10.20	.4016		133.00	87.00	C15574	—	—	—
	Y		.4040	5.250		3.875	C15673	—	C16453	—
13/32			.4062	5.250		3.875	C16577	C16689	—	—
	Z		.4130	5.250		3.875	C15674	—	C16454	—
		10.50	.4134		133.00	87.00	C16607	C16719	—	—
27/64			.4219	5.375		3.938	C16578	C16690	—	—
		10.80	.4252		142.00	94.00	C15575	—	—	—
		11.00	.4331		142.00	94.00	C16608	C16720	—	C11385
7/16			.4375	5.500		4.063	C16579	C16691	C16970	C17000
		11.20	.4409		142.00	94.00	C15576	—	—	—
		11.50	.4528		142.00	94.00	C16609	C16721	—	—
29/64			.4531	5.625		4.188	C16580	C16692	—	—
15/32			.4688	5.750		4.313	C16581	C16693	—	—
		12.00	.4724		151.00	101.00	C16610	C16722	—	C11386
		12.25	.4823		151.00	101.00	C15577	—	—	—
31/64			.4844	5.875		4.375	C16582	C16694	—	—
		12.50	.4921		151.00	101.00	C16611	C16723	—	—
1/2			.5000	6.000		4.500	C16583	C16695	C16971	C17001
		13.00	.5118		151.00	101.00	C15583	—	—	C11387

SET

Style: **2075**


Wide Land Parabolic
Q-Cobalt™

no. of pieces	surface treatment	size range	order number
15	straw oxide	1/16" through 1/2" x 1/32"	2075 C00901
29	straw oxide	1/16" through 1/2" x 1/64"	C00902

15-Piece Set
#C00901



29-Piece Set
#C00902



Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	TiN	★		★									
	TiCN	☆		☆		★	★	★	★	☆			
	TiAlN					☆	☆	☆	☆				

☆ = Best Performance

★ = Acceptable

Left Hand

Style: **2006**

Note

Operating parameters begin on page 121.

ASME
B94.11M

HSS


118°

Helix
Regular
21° to 34°

Straight
Shank

Surface
Treatment

Bright

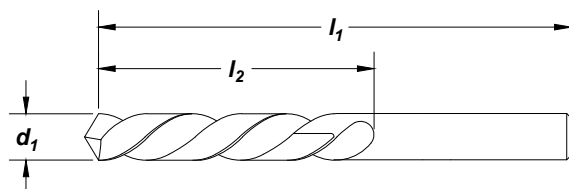

Feature:

Left Hand for reverse spindle application.

drill diameter d₁		overall length l₁ (in)		flute length l₂ (in)	order no. 2006
fraction	decimal equiv.				
1/16	.0625	1.875	.875		C01401
5/64	.0781	2.000	1.000		C01415
3/32	.0938	2.250	1.250		C01430
7/64	.1094	2.625	1.500		C01443
1/8	.1250	2.750	1.625		C01453
9/64	.1406	2.875	1.750		C01462
5/32	.1562	3.125	2.000		C01473
11/64	.1719	3.250	2.125		C01484
3/16	.1875	3.500	2.313		C01495
13/64	.2031	3.875	2.438		C01506
7/32	.2188	3.750	2.500		C01516
1/4	.2500	4.000	2.750		C01532
17/64	.2656	4.125	2.875		C01538
9/32	.2812	4.250	2.938		C01551
5/16	.3125	4.500	3.188		C01561
3/8	.3750	5.000	3.625		C01588
13/32	.4062	5.250	3.875		C01600

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright	☆			☆				☆		☆			

☆ = Best Performance ◆ = Acceptable


Style: 2228
Aircraft NAS 907, Type A
 General Purpose

Note

Split point for reduced thrust and easy penetration.
 Operating parameters begin on page 121.

HSS

NAS 907
TYPE A

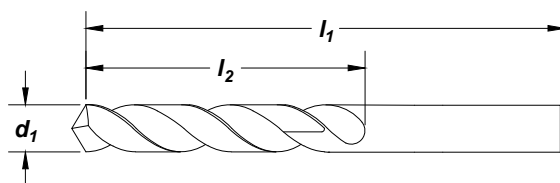Surface
Treatment

Jobber Length
High Speed Steel

drill diameter		decimal equiv.	overall length		flute length		order number
fraction	d ₁		I ₁ (in)	I ₂ (in)			2228 bright
1/16	wire	.0625	1.875	.875			C73400
	52	.0635	1.875	.875			C73480
	51	.0670	2.000	1.000			C73479
	50	.0700	2.000	1.000			C73478
	49	.0730	2.000	1.000			C73477
5/64	48	.0760	2.000	1.000			C73476
		.0781	2.000	1.000			C73401
	47	.0785	2.000	1.000			C73475
	46	.0810	2.125	1.125			C73474
	45	.0820	2.125	1.125			C73473
3/32	44	.0860	2.125	1.125			C73472
	43	.0890	2.250	1.250			C73471
	42	.0935	2.250	1.250			C73470
		.0938	2.250	1.250			C73402
	41	.0960	2.375	1.375			C73469
7/64	40	.0980	2.375	1.375			C73468
	39	.0995	2.375	1.375			C73467
	38	.1015	2.500	1.438			C73466
	37	.1040	2.500	1.438			C73465
	36	.1065	2.500	1.438			C73464
1/8		.1094	2.625	1.500			C73403
	35	.1100	2.625	1.500			C73463
	34	.1110	2.625	1.500			C73462
	33	.1130	2.625	1.500			C73461
	32	.1160	2.750	1.625			C73460
9/64	31	.1200	2.750	1.625			C73459
		.1250	2.750	1.625			C73404
	30	.1285	2.750	1.625			C73458
	29	.1360	2.875	1.750			C73457
	28	.1405	2.875	1.750			C73456
		.1406	2.875	1.750			C73405
	27	.1440	3.000	1.875			C73455
	26	.1470	3.000	1.875			C73454

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆		◆				☆			


☆ = Best Performance ◆ = Acceptable

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number
fraction	d ₁ wire				2228 bright
	25	.1495	3.000	1.875	C73453
	24	.1520	3.125	2.000	C73452
	23	.1540	3.125	2.000	C73451
5/32		.1562	3.125	2.000	C73406
	22	.1570	3.125	2.000	C73450
	21	.1590	3.250	2.125	C73449
	20	.1610	3.250	2.125	C73448
	19	.1660	3.250	2.125	C73447
	18	.1695	3.250	2.125	C73446
11/64		.1719	3.250	2.125	C73407
	17	.1730	3.375	2.188	C73445
	16	.1770	3.375	2.188	C73444
	15	.1800	3.375	2.188	C73443
	14	.1820	3.375	2.188	C73442
	13	.1850	3.500	2.313	C73441
3/16		.1875	3.500	2.313	C73408
	12	.1890	3.500	2.313	C73440
	11	.1910	3.500	2.313	C73439
	10	.1935	3.625	2.438	C73438
	9	.1960	3.625	2.438	C73437
	8	.1990	3.625	2.438	C73436
	7	.2010	3.625	2.438	C73435
13/64		.2031	3.625	2.438	C73409
	6	.2040	3.750	2.500	C73434
	5	.2055	3.750	2.500	C73433
	4	.2090	3.750	2.500	C73432
	3	.2130	3.750	2.500	C73431
7/32		.2188	3.750	2.500	C73410
	2	.2210	3.875	2.625	C73430
	1	.2280	3.875	2.625	C73429
15/64		.2344	3.875	2.625	C73411
1/4		.2500	4.000	2.750	C73412
17/64		.2656	4.125	2.875	C73413
9/32		.2812	4.250	2.938	C73414
19/64		.2969	4.375	3.063	C73415
5/16		.3125	4.500	3.188	C73416
21/64		.3281	4.625	3.313	C73417
11/32		.3438	4.750	3.438	C73418
23/64		.3594	4.875	3.500	C73419
3/8		.3750	5.000	3.625	C73420
25/64		.3906	5.125	3.750	C73421
13/32		.4062	5.250	3.875	C73422
27/64		.4219	5.375	3.938	C73423
7/16		.4375	5.500	4.063	C73424
29/64		.4531	5.625	4.188	C73425
15/32		.4688	5.750	4.313	C73426
31/64		.4844	5.875	4.375	C73427
1/2		.5000	6.000	4.500	C73428

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright	☆			☆		◆				☆			

☆ = Best Performance ◆ = Acceptable

Note
 Operating parameters begin on page 121.

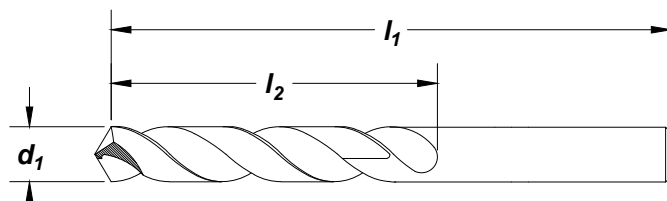

Feature:
 Heavy Duty design for tougher materials.

drill diameter					order number
d ₁		decimal	overall length	flute length	2222
fraction	wire/letter	equiv.	l ₁ (in)	l ₂ (in)	bright
*3/64		.0469	1.750	.750	C11600
1/16		.0625	1.875	.875	C11601
	52	.0635	1.875	.875	C11706
	51	.0670	2.000	1.000	C11705
	50	.0700	2.000	1.000	C11704
	49	.0730	2.000	1.000	C11703
	48	.0760	2.000	1.000	C11702
5/64		.0781	2.000	1.000	C11602
	47	.0785	2.000	1.000	C11701
	46	.0810	2.125	1.125	C11700
	45	.0820	2.125	1.125	C11699
	44	.0860	2.125	1.125	C11698
	43	.0890	2.250	1.250	C11697
	42	.0935	2.250	1.250	C11696
3/32		.0938	2.250	1.250	C11603
	41	.0960	2.375	1.375	C11695
	40	.0980	2.375	1.375	C11694
	39	.0995	2.375	1.375	C11693
	38	.1015	2.500	1.438	C11692
	37	.1040	2.500	1.438	C11691
	36	.1065	2.500	1.438	C11690
7/64		.1094	2.625	1.500	C11604
	35	.1100	2.625	1.500	C11689
	34	.1110	2.625	1.500	C11688
	33	.1130	2.625	1.500	C11687
	32	.1160	2.750	1.625	C11686
	31	.1200	2.750	1.625	C11685
1/8		.1250	2.750	1.625	C11605
	30	.1285	2.750	1.625	C11684
	29	.1360	2.875	1.750	C11683

*Not split point.

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		◆		◆	◆	☆			

☆ = Best Performance ◆ = Acceptable

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number
fraction	d ₁ wire/letter				2222 bright
9/64	28	.1405	2.875	1.750	C11682
		.1406	2.875	1.750	C11606
	27	.1440	3.000	1.875	C11681
	26	.1470	3.000	1.875	C11680
	25	.1495	3.000	1.875	C11679
	24	.1520	3.125	2.000	C11678
	23	.1540	3.125	2.000	C11677
	5/32	.1562	3.125	2.000	C11607
	22	.1570	3.125	2.000	C11676
	21	.1590	3.250	2.125	C11675
	20	.1610	3.250	2.125	C11674
	19	.1660	3.250	2.125	C11673
	18	.1695	3.250	2.125	C11672
	11/64	.1719	3.250	2.125	C11608
	17	.1730	3.375	2.188	C11671
	16	.1770	3.375	2.188	C11670
	15	.1800	3.375	2.188	C11669
	14	.1820	3.375	2.188	C11668
	13	.1850	3.500	2.313	C11667
3/16		.1875	3.500	2.313	C11609
	12	.1890	3.500	2.313	C11666
	11	.1910	3.500	2.313	C11665
	10	.1935	3.625	2.438	C11664
	9	.1960	3.625	2.438	C11663
	8	.1990	3.625	2.438	C11662
	7	.2010	3.625	2.438	C11661
	13/64	.2031	3.625	2.438	C11610
	6	.2040	3.750	2.500	C11660
	5	.2055	3.750	2.500	C11659
	4	.2090	3.750	2.500	C11658
	3	.2130	3.750	2.500	C11657
	7/32	.2188	3.750	2.500	C11611
	2	.2210	3.875	2.625	C11656
	1	.2280	3.875	2.625	C11655
	A	.2340	3.875	2.625	C11630
	15/64	.2344	3.875	2.625	C11612
	B	.2380	4.000	2.750	C11631
	C	.2420	4.000	2.750	C11632
	D	.2460	4.000	2.750	C11633
1/4	E	.2500	4.000	2.750	C11613
	F	.2570	4.125	2.875	C11634
	G	.2610	4.125	2.875	C11635
17/64		.2656	4.125	2.875	C11614
	H	.2660	4.125	2.875	C11636
	I	.2720	4.125	2.875	C11637
	J	.2770	4.125	2.875	C11638
	K	.2810	4.250	2.938	C11639
9/32		.2812	4.250	2.938	C11615
	L	.2900	4.250	2.938	C11640
	M	.2950	4.375	3.063	C11641
19/64		.2969	4.375	3.063	C11616
	N	.3020	4.375	3.063	C11642
5/16		.3125	4.500	3.188	C11617
	O	.3160	4.500	3.188	C11643

continued on next page

Style: 2222 (continued)
Aircraft NAS 907, Type B
Heavy Duty

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number
fraction	wire/letter				2222 bright
21/64	P	.3230	4.625	3.188	C11644
		.3281	4.625	3.188	C11618
	Q	.3320	4.750	3.438	C11645
11/32	R	.3390	4.750	3.438	C11646
		.3438	4.750	3.438	C11619
	S	.3480	4.875	3.500	C11647
23/64	T	.3580	4.875	3.500	C11648
		.3594	4.875	3.500	C11620
	U	.3680	5.000	3.625	C11649
3/8		.3750	5.000	3.625	C11621
	V	.3770	5.000	3.625	C11650
	W	.3860	5.125	3.750	C11651
25/64		.3906	5.125	3.750	C11622
	X	.3970	5.125	3.750	C11652
	Y	.4040	5.250	3.875	C11653
13/32		.4062	5.250	3.875	C11623
	Z	.4130	5.250	3.875	C11654
		.4219	5.375	3.938	C11624
7/16		.4375	5.500	4.063	C11625
29/64		.4531	5.625	4.188	C11626
15/32		.4688	5.750	4.313	C11627
31/64		.4844	5.875	4.375	C11628
1/2		.5000	6.000	4.500	C11629

Jobber Length
High Speed Steel
SET
Style: 2222
Aircraft NAS 907, Type B
Heavy Duty


no. of pieces	drill style	surface treatment	size range	order number
29	2222	bright	1/16" through 1/2" x 1/64"	2222 C70371


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		◆		◆	◆	☆			

☆ = Best Performance ◆ = Acceptable

Note

Operating parameters begin on page 121.

**M42
Cobalt**
**NAS 907
TYPE J**

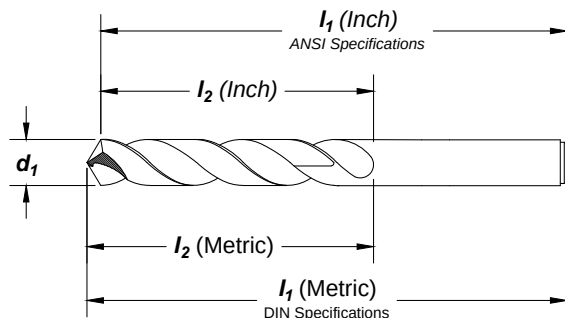**Surface
Treatment**
**Straw
Oxide**

Feature:

Highly heat resistant cobalt substrate for tough to machine materials.

drill diameter			overall length		flute length		order number	
d ₁			l ₁		l ₂			
fraction	wire/letter	mm	decimal equiv.	in	mm	in		mm
	*80		.0135	.750		.125		C70213
	*79		.0145	.750		.125		C70212
*1/64			.0156	.750		.188		C70000
	*78		.0160	.875		.188		C70211
	*77		.0180	.875		.188		C70210
	*76		.0200	.875		.188		C70209
	*75		.0210	1.000		.250		C70208
	*74		.0225	1.000		.250		C70207
	*73		.0240	1.125		.313		C70206
	*72		.0250	1.125		.313		C70205
	*71		.0260	1.250		.375		C70204
	*70		.0280	1.250		.375		C70203
	*69		.0292	1.375		.500		C70202
	*68		.0310	1.375		.500		C70201
*1/32			.0312	1.375		.500		C70001
	*67		.0320	1.375		.500		C70200
	*66		.0330	1.375		.500		C70199
	*65		.0350	1.500		.625		C70198
	*64		.0360	1.500		.625		C70197
	*63		.0370	1.500		.625		C70196
	*62		.0380	1.500		.625		C70195
	*61		.0390	1.625		.688		C70194
		*1.0	.0394		34.00		12.00	C70057
	*60		.0400	1.625		.688		C70193
	*59		.0410	1.625		.688		C70192
	*58		.0420	1.625		.688		C70191
	*57		.0430	1.750		.750		C70190
		*1.1	.0433		36.00		14.00	C70058
	*56		.0465	1.750		.750		C70189
*3/64			.0469	1.750		.750		C70002
		*1.2	.0472		38.00		16.00	C70059
		*1.3	.0512		38.00		16.00	C70060
	*55		.0520	1.875		.875		C70188
	*54		.0550	1.875		.875		C70187
		*1.4	.0551		40.00		18.00	C70061
		*1.5	.0591		40.00		18.00	C70062
	*53		.0595	1.875		.875		C70186

*Not split point.

continued on next page

drill diameter			decimal equiv.	overall length		flute length		order number
fraction	wire/letter	mm		in	mm	in	mm	
2213								
1/16			.0625	1.875		.875		C70003
		1.6	.0630		43.00		20.00	C70063
	52		.0635	1.875		.875		C70185
		1.7	.0669		43.00		20.00	C70064
	51		.0670	2.000		1.000		C70184
	50		.0700	2.000		1.000		C70183
		1.8	.0709		46.00		22.00	C70065
	49		.0730	2.000		1.000		C70182
		1.9	.0748		46.00		22.00	C70220
	48		.0760	2.000		1.000		C70181
5/64			.0781	2.000		1.000		C70004
	47		.0785	2.000		1.000		C70180
		2.0	.0787		49.00		24.00	C70067
	46		.0810	2.125		1.125		C70179
	45		.0820	2.125		1.125		C70178
		2.1	.0827		49.00		24.00	C70068
	44		.0860	2.125		1.125		C70177
		2.2	.0866		53.00		27.00	C70221
	43		.0890	2.250		1.250		C70176
		2.3	.0906		53.00		27.00	C70070
	42		.0935	2.250		1.250		C70175
3/32			.0938	2.250		1.250		C70005
		2.4	.0945		57.00		30.00	C70071
	41		.0960	2.375		1.375		C70174
	40		.0980	2.375		1.375		C70173
		2.5	.0984		57.00		30.00	C70072
	39		.0995	2.375		1.375		C70172
	38		.1015	2.500		1.438		C70171
		2.6	.1024		57.00		30.00	C70073
	37		.1040	2.500		1.438		C70170
		2.7	.1063		61.00		33.00	C70074
	36		.1065	2.500		1.438		C70169
7/64			.1094	2.625		1.500		C70006
	35		.1100	2.625		1.500		C70168
		2.8	.1102		61.00		33.00	C70222
	34		.1110	2.625		1.500		C70167
	33		.1130	2.625		1.500		C70166
		2.9	.1142		61.00		33.00	C70076
	32		.1160	2.750		1.625		C70165
		3.0	.1181		61.00		33.00	C70077
	31		.1200	2.750		1.625		C70164
		3.1	.1220		65.00		36.00	C70078
1/8	1/8		.1250	2.750		1.625		C70007
		3.2	.1260		65.00		36.00	C70079
	30		.1285	2.750		1.625		C70163
		3.3	.1299		65.00		36.00	C70080
		3.4	.1339		70.00		39.00	C70081
	29		.1360	2.875		1.750		C70162
		3.5	.1378		70.00		39.00	C70082

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Straw	☆			☆		☆	☆	◆	◆	☆	◆	◆	

☆ = Best Performance ◆ = Acceptable

drill diameter			overall length		flute length		order number
fraction	wire/letter	d ₁ mm	decimal equiv.	l ₁ in mm	l ₂ in mm		
9/64	28		.1405	2.875	1.750		C70161
			.1406	2.875	1.750		C70008
		3.6	.1417			39.00	C70083
	27		.1440	3.000	1.875		C70160
		3.7	.1457			39.00	C70223
			.1470	3.000	1.875		C70159
	25		.1495	3.000	1.875		C70158
		3.8	.1496			43.00	C70085
			.1520	3.125	2.000		C70157
	23		.1535			43.00	C70086
		3.9	.1540	3.125	2.000		C70156
			.1562	3.125	2.000		C70009
5/32	22		.1570	3.125	2.000		C70155
		4.0	.1575			43.00	C70087
			.1590	3.250	2.125		C70154
	20		.1610	3.250	2.125		C70153
		4.1	.1614			43.00	C70088
		4.2	.1654			43.00	C70089
	19		.1660	3.250	2.125		C70152
		4.3	.1693			47.00	C70090
			.1695	3.250	2.125		C70151
11/64	18		.1719			53.98	C70010
			.1730	3.375	2.188		C70150
		4.4	.1732			47.00	C70091
	16		.1770	3.375	2.188		C70149
		4.5	.1772			47.00	C70092
			.1800	3.375	2.188		C70148
	15		.1811			47.00	C70224
		4.6	.1820	3.375	2.188		C70147
			.1850	3.500	2.313		C70146
3/16	13		.1850			47.00	C70094
			.1875	3.500	2.313		C70011
			.1890	3.500	2.313		C70145
	12		.1890			52.00	C70095
		4.8	.1910	3.500	2.313		C70144
		4.9	.1929			52.00	C70096
	10		.1935	3.625	2.438		C70143
			.1960	3.625	2.438		C70142
		5.0	.1968			52.00	C70097
	8		.1990	3.625	2.438		C70141
		5.1	.2008			52.00	C70098
			.2010	3.625	2.438		C70140
13/64	7		.2031	3.625	2.438		C70012
			.2040	3.750	2.500		C70139
		5.2	.2047			52.00	C70099
	5		.2055	3.750	2.500		C70138
		5.3	.2087			52.00	C70100
			.2090	3.750	2.500		C70137
	4		.2126			57.00	C70101
		5.4	.2130	3.750	2.500		C70136
			.2165			57.00	C70102
7/32	3		.2188	3.750	2.500		C70013
		5.5	.2205			57.00	C70225
			.2210	3.875	2.625		C70135
	2		.2244			57.00	C70104
		5.7	.2280	3.875	2.625		C70134
			.2283			57.00	C70226

continued on next page

drill diameter			overall length		flute length		order number 2213	
d1				l1		l2		
fraction	wire/letter	mm	decimal equiv.	in	mm	in		mm
15/64	A		.2340	3.875		2.625		C70032
			.2344	3.875		2.625		C70014
		6.0	.2362		93.00		57.00	C70106
	B		.2380	4.000		2.750		C70033
		6.1	.2402		101.00		63.00	C70107
	C		.2420	4.000		2.750		C70034
		6.2	.2441		101.00		63.00	C70108
	D		.2460	4.000		2.750		C70035
		6.3	.2480		101.00		63.00	C70109
1/4	E		.2500	4.000		2.750		C70015
			.2500	4.000		2.750		C70015
		6.4	.2520		101.00		63.00	C70110
		6.5	.2559		101.00		63.00	C70111
	F		.2570	4.125		2.875		C70036
		6.6	.2598		101.00		63.00	C70112
	G		.2610	4.125		2.875		C70037
		6.7	.2638		101.00		63.00	C70113
17/64			.2656	4.125		2.875		C70016
	H		.2660	4.125		2.875		C70038
		6.8	.2677		109.00		69.00	C70114
	I		.2720	4.125		2.875		C70039
		7.0	.2756		109.00		69.00	C70115
	J		.2770	4.125		2.875		C70040
9/32			.2812	4.250		2.938		C70017
	K		.2812	4.250		2.938		C70041
		7.2	.2835		109.00		69.00	C70116
	L		.2900	4.250		2.938		C70042
	M		.2950	4.375		3.063		C70043
		7.5	.2953		109.00		69.00	C70117
19/64			.2969	4.375		3.063		C70018
	N		.3020	4.375		3.063		C70044
		7.8	.3071		117.00		75.00	C70118
5/16			.3125	4.500		3.188		C70019
		8.0	.3150		117.00		75.00	C70119
	O		.3160	4.500		3.188		C70045
		8.1	.3189		117.00		75.00	C70120
	P		.3230	4.625		3.313		C70046
21/64			.3281	4.625		3.313		C70020
	Q		.3320	4.750		3.438		C70047
		8.5	.3346		117.00		75.00	C70122
	R		.3390	4.750		3.438		C70048
11/32			.3438	4.750		3.438		C70021
	S		.3480	4.875		3.500		C70049
		9.0	.3543		125.00		81.00	C70124
	T		.3580	4.875		3.500		C70050
23/64			.3594	4.875		3.500		C70022
	U		.3680	5.000		3.625		C70051

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Straw	☆		☆		☆	☆	◆	◆	☆	◆	◆	

☆ = Best Performance ◆ = Acceptable

drill diameter			overall length		flute length		order number
d ₁		decimal equiv.	l ₁		l ₂		
fraction	wire/letter		in	mm	in	mm	
		9.5	.3740		125.00	81.00	C70125
3/8			.3750	5.000		3.625	C70023
	V		.3770	5.000		3.625	C70052
	W		.3860	5.125		3.750	C70053
25/64			.3906	5.125		3.750	C70024
		10.0	.3937		133.00	87.00	C70126
	X		.3970	5.125		3.720	C70054
		10.2	.4016		133.00	87.00	C70127
	Y		.4040	5.250		3.875	C70055
13/32			.4062	5.250		3.875	C70025
	Z		.4130	5.250		3.875	C70056
		10.5	.4134		133.00	87.00	C70128
27/64			.4219	5.375		3.938	C70026
		11.0	.4331		142.00	94.00	C70129
7/16			.4375	5.500		4.063	C70027
		11.5	.4528		142.00	94.00	C70130
29/64			.4531	5.625		4.188	C70028
15/32			.4688	5.750		4.313	C70029
		12.0	.4724		151.00	101.00	C70131
31/64			.4844	5.875		4.375	C70030
		12.5	.4921		151.00	101.00	C70132
1/2			.5000	6.000		4.500	C70031
		13.0	.5118		151.00	101.00	C70133

Aircraft NAS 907, Type J
Cobalt Heavy Duty

SET

Style: 2213

no. of pieces	surface treatment	size range	order number
29	straw oxide	1/16" through 1/2" x 1/64"	C70365
26	straw oxide	A through Z letter	C00986
60	straw oxide	#1 through #60 wire gauge	C70366
115	straw oxide	1/16" through 1/2" x 1/64", A through Z and #1 through #60	C70367



Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Straw	☆			☆		☆	☆	◆	◆	☆	◆	◆	

☆ = Best Performance ◆ = Acceptable

Note


Operating parameters begin on page 121.

ASME
B94.11M

HSS



Surface
Treatment

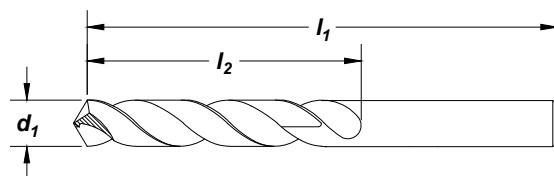

Jobber Length

High Speed Steel

Feature:

Fast penetrating split point design. Constant parallel web for easy regrinds.

drill diameter		decimal equiv.	overall length		order number
fraction	wire/letter		l_1 (in)	l_2 (in)	
	*80	.0135	.750	.125	C02593
	*54	.0550	1.875	.875	C02646
1/16		.0625	1.875	.875	C02652
	52	.0635	1.875	1.000	C02654
	50	.0700	2.000	1.000	C02659
5/64		.0781	2.000	1.000	C02666
	47	.0785	2.000	1.000	C02667
	45	.0820	2.125	1.125	C02671
3/32		.0938	2.250	1.250	C02681
	40	.0980	2.375	1.375	C02685
	37	.1040	2.500	1.438	C02690
7/64		.1094	2.625	1.500	C02694
	32	.1160	2.750	1.625	C02700
	31	.1200	2.750	1.625	C02702
1/8		.1250	2.750	1.625	C02704
	30	.1285	2.750	1.625	C02707
	29	.1360	2.875	1.750	C02710
9/64		.1406	2.875	1.750	C02713
	25	.1495	3.000	1.875	C02719
5/32		.1562	3.125	2.000	C02724
11/64		.1719	3.125	2.000	C02735
3/16		.1875	3.500	2.313	C02746
7/32		.2188	3.750	2.500	C02767
15/64		.2344	3.875	2.625	C02776
1/4	E	.2500	4.000	2.750	C02785
9/32		.2812	4.250	2.938	C02807
19/64		.2969	4.375	3.063	C02811
5/16		.3125	4.500	3.188	C02818
11/32		.3438	4.750	3.188	C02833
3/8		.3750	5.000	3.625	C02848
13/32		.4062	5.250	3.875	C02861
7/16		.4375	5.500	4.063	C02867
15/32		.4688	5.750	4.313	C02872
1/2		.5000	6.000	4.500	C02877

*Not split point.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Black Oxide		★		☆		★		☆	★				
☆ = Best Performance ★ = Acceptable													


Note

High helix for efficient chip removal.

Operating parameters begin on page 121.



Surface
Treatment

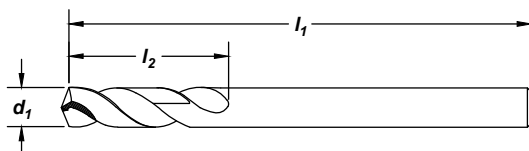
Feature:

Preferred point for work hardening materials, with extra heavy web for superior rigidity.

drill diameter					order number	
d ₁					3780	3780-TC
fraction	wire/letter	decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	black oxide	TiCN
	*60	.0400	1.625	.500	C15880	C19880
	*59	.0410	1.625	.500	C15881	—
	*58	.0420	1.625	.500	C15882	C19882
	*57	.0430	1.750	.500	C15883	—
	*56	.0465	1.750	.500	C15884	—
*3/64		.0469	1.750	.500	C15885	C19885
	*55	.0520	1.750	.625	C15886	—
	*54	.0550	1.875	.625	C15887	—
	*53	.0595	1.875	.625	C15888	—
1/16		.0625	1.875	.625	C15889	C19889
	52	.0635	1.875	.688	C15890	C19890
	51	.0670	2.000	.688	C15891	—
	50	.0700	2.000	.688	C15892	C19892
	49	.0730	2.000	.688	C15893	—
	48	.0760	2.000	.688	C15894	—
5/64		.0781	2.000	.688	C15895	C19895
	47	.0785	2.000	.688	C15896	C19896
	46	.0810	2.125	.750	C15897	—
	45	.0820	2.125	.750	C15898	—
	44	.0860	2.125	.750	C15899	—
	43	.0890	2.250	.750	C15900	C19900
	42	.0935	2.250	.750	C15901	C19901
3/32		.0938	2.250	.750	C15902	C19902
	41	.0960	2.375	.813	C15903	C19903
	40	.0980	2.375	.813	C15904	C19904
	39	.0995	2.375	.813	C15905	—
	38	.1015	2.500	.813	C15906	—
	37	.1040	2.500	.813	C15907	—
	36	.1065	2.500	.813	C15908	—
7/64		.1094	2.625	.813	C15909	C19909
	35	.1100	2.625	.875	C15910	—
	34	.1110	2.625	.875	C15911	—
	33	.1130	2.625	.875	C15912	—
	32	.1160	2.750	.875	C15913	—
	31	.1200	2.750	.875	C15914	—
1/8		.1250	2.750	.875	C15915	C19915
	30	.1285	2.750	.938	C15916	C19916
	29	.1360	2.875	.938	C15917	C19917
	28	.1405	2.875	.938	C15918	—
9/64		.1406	2.875	.938	C15919	C19919
	27	.1440	3.000	1.000	C15920	C19920
	26	.1470	3.000	1.000	C15921	C19921

*Not split point.

continued on next page

drill diameter		decimal equiv.	overall length		flute length		order number	
fraction	d ₁ wire/letter		I ₁ (in)	I ₂ (in)			3780 black oxide	3780-TC TiCN
	25	.1495	3.000	1.000			C15922	C19922
	24	.1520	3.125	1.000			C15923	—
	23	.1540	3.125	1.000			C15924	—
5/32		.1562	3.125	1.000			C15925	C19925
	22	.1570	3.125	1.063			C15926	—
	21	.1590	3.250	1.063			C15927	C19927
	20	.1610	3.250	1.063			C15928	C19928
	19	.1660	3.250	1.063			C15929	C19929
	18	.1695	3.250	1.063			C15930	C19930
11/64		.1719	3.250	1.063			C15931	C19931
	17	.1730	3.375	1.125			C15932	—
	16	.1770	3.375	1.125			C15933	C19933
	15	.1800	3.375	1.125			C15934	—
	14	.1820	3.375	1.125			C15935	—
	13	.1850	3.500	1.125			C15936	—
3/16		.1875	3.500	1.125			C15937	C19937
	12	.1890	3.500	1.188			C15938	—
	11	.1910	3.500	1.188			C15939	C19939
	10	.1935	3.625	1.188			C15940	C19940
	9	.1960	3.625	1.188			C15941	—
	8	.1990	3.625	1.188			C15942	C19942
	7	.2010	3.625	1.188			C15943	—
13/64		.2031	3.625	1.188			C15944	C19944
	6	.2040	3.750	1.250			C15945	—
	5	.2055	3.750	1.250			C15946	—
	4	.2090	3.750	1.250			C15947	—
	3	.2130	3.750	1.250			C15948	—
7/32		.2188	3.750	1.250			C15949	C19949
	2	.2210	3.875	1.313			C15950	—
	1	.2280	3.875	1.313			C15951	C19951
	A	.2340	3.875	1.313			C15952	—
15/64		.2344	3.875	1.313			C15953	C19953
	B	.2380	4.000	1.375			C15954	—
	C	.2420	4.000	1.375			C15955	C19955
	D	.2460	4.000	1.375			C15956	C19956
1/4		.2500	4.000	1.375			C15957	C19957
	F	.2570	4.125	1.438			C15958	C19958
	G	.2610	4.125	1.438			C15959	C19959
17/64		.2656	4.125	1.438			C15960	C19960
	H	.2660	4.125	1.500			C15961	—
	I	.2720	4.125	1.500			C15962	C19962
	J	.2770	4.125	1.500			C15963	—
	K	.2810	4.250	1.500			C15964	—
9/32		.2812	4.250	1.500			C15965	C19965
	L	.2900	4.250	1.563			C15966	—
	M	.2950	4.375	1.563			C15967	—
19/64		.2969	4.375	1.563			C15968	C19968
	N	.3020	4.375	1.625			C15969	C19969

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Hardness	◆		◆		◆	◆		◆	◆		◆		
Black Oxide	☆		☆		☆	☆					☆		
TiCN													

☆ = Best Performance ◆ = Acceptable

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number	
fraction	d ₁ wire/letter				3780 black oxide	3780-TC TiCN
5/16		.3125	4.500	1.625	C15970	C19970
	O	.3160	4.500	1.688	C15971	C19971
	P	.3230	4.625	1.688	C15972	—
21/64		.3281	4.625	1.688	C15973	—
	Q	.3320	4.750	1.688	C15974	C19974
	R	.3390	4.750	1.688	C15975	—
11/32		.3438	4.750	1.688	C15976	C19976
	S	.3480	4.875	1.750	C15977	—
	T	.3580	4.875	1.750	C15978	—
23/64		.3594	4.875	1.750	C15979	—
	U	.3680	5.000	1.813	C15980	—
3/8		.3750	5.000	1.813	C15981	C19981
	V	.3770	5.000	1.875	C15982	—
	W	.3860	5.125	1.875	C15983	—
25/64		.3906	5.125	1.875	C15984	—
	X	.3970	5.125	1.938	C15985	—
	Y	.4040	5.250	1.938	C15986	—
13/32		.4062	5.250	1.938	C15987	C19987
	Z	.4130	5.250	2.000	C15988	—
27/64		.4219	5.375	2.000	C15989	—
7/16		.4375	5.500	2.063	C15990	—
29/64		.4531	5.625	2.125	C15991	—
15/32		.4688	5.750	2.125	C15992	—
31/64		.4844	5.875	2.188	C15993	—
1/2		.5000	6.000	2.250	C15994	C19994

Q-AMD™ Short Flute
Aircraft Maintenance

SET

Style: **3780**



no. of pieces	surface treatment	size range	order number
29	black oxide	1/16" through 1/2" x 1/64"	3780 C14499

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				>45
Hardness													
Black Oxide	★		★		★	★		★	★		★		
TiCN	☆		☆		☆	☆					☆		


☆ = Best Performance ★ = Acceptable

Note

Operating parameters begin on page 121.



Surface
Treatment

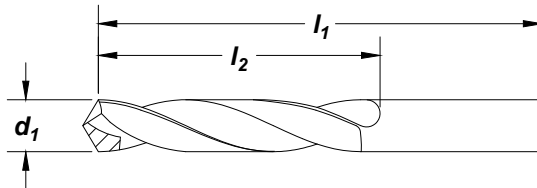

Jobber Length

Carbide

Feature:

Run at carbide speeds with the flexibility of a HSS body and shank.

drill diameter		decimal equiv.	overall length	flute length	order number
d ₁ fraction	wire/letter		l ₁ (in)	l ₂ (in)	
1/8		.1250	2.750	1.625	C48655
5/32		.1562	3.125	2.000	C48675
3/16		.1875	3.500	2.313	C48697
	7	.2010	3.625	2.438	C48707
7/32		.2188	3.750	2.500	C48718
1/4	E	.2500	4.000	2.750	C48736
9/32		.2812	4.250	2.938	C48758
5/16		.3125	4.500	3.188	C48769
11/32		.3438	4.750	3.438	C48784
3/8		.3750	5.000	3.625	C48799
13/32		.4062	5.250	3.875	C48812
7/16		.4375	5.500	4.063	C48818
15/32		.4688	5.750	4.313	C48823
1/2		.5000	6.000	4.500	C48828

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		◆		◆		☆		☆			

☆ = Best Performance ◆ = Acceptable

Straight Flute

Style: 1766



Note

Tolerances for Series DM Drills:
Cutting Diameter: +.000, -.0005
Shank Diameter: +.0000, -.0005

ASME
B94.11M

Carbide


140° 4-Facet

Helix
High
35° to 45°

Straight
Shank

Surface
Treatment

Bright

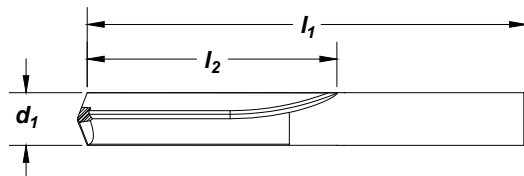

cutting diameter		overall length	flute length	order number
frac	d1 wire decimal	l1	l2	1766
1/32	.0313	1-1/2	1/2	C89410
	60 .0400	1-1/2	1/2	C89411
	59 .0410	1-1/2	1/2	C89412
	58 .0420	1-1/2	1/2	C89413
	57 .0430	1-1/2	1/2	C89414
	56 .0465	1-1/2	1/2	C89415
3/64	.0469	1-1/2	1/2	C89416
	55 .0520	1-1/2	1/2	C89417
	54 .0550	1-1/2	1/2	C89418
	53 .0595	1-1/2	1/2	C89419
1/16	.0625	1-5/8	5/8	C89420
	52 .0635	1-11/16	11/16	C89421
	51 .0670	1-11/16	11/16	C89422
	50 .0700	1-11/16	11/16	C89423
	49 .0730	1-11/16	11/16	C89424
	48 .0760	1-11/16	11/16	C89425
5/64	.0781	1-11/16	11/16	C89426
	47 .0785	1-3/4	3/4	C89427
	46 .0810	1-3/4	3/4	C89428
	45 .0820	1-3/4	3/4	C89429
	44 .0860	1-3/4	3/4	C89430
	43 .0890	1-3/4	3/4	C89431
	42 .0935	1-3/4	3/4	C89432
3/32	.0938	1-3/4	3/4	C89433
	41 .0960	1-13/16	13/16	C89434
	40 .0980	1-13/16	13/16	C89435
	39 .0995	1-13/16	13/16	C89436
	38 .1015	1-13/16	13/16	C89437
	37 .1040	1-13/16	13/16	C89438
	36 .1065	1-13/16	13/16	C89439
7/64	.1094	1-13/16	13/16	C89440
	35 .1100	1-7/8	7/8	C89441
	34 .1110	1-7/8	7/8	C89442
	33 .1130	1-7/8	7/8	C89443
	32 .1160	1-7/8	7/8	C89444
	31 .1200	1-7/8	7/8	C89445
1/8	.1250	1-7/8	7/8	C89446
	30 .1285	1-15/16	15/16	C89447
	29 .1360	1-15/16	15/16	C89448
	28 .1405	1-15/16	15/16	C89449
9/64	.1406	1-15/16	15/16	C89450
	27 .1440	2-1/16	1	C89451
	26 .1470	2-1/16	1	C89452
	25 .1495	2-1/16	1	C89453
	24 .1520	2-1/16	1	C89454
	23 .1540	2-1/16	1	C89455

cutting diameter		overall length	flute length	order number
frac	d1 wire decimal	l1	l2	1766
5/32	.1562	2-1/16	1	C89456
	22 .1570	2-1/8	1-1/16	C89457
	21 .1590	2-1/8	1-1/16	C89458
	20 .1610	2-1/8	1-1/16	C89459
	19 .1660	2-1/8	1-1/16	C89460
	18 .1695	2-1/8	1-1/16	C89461
11/64	.1719	2-1/8	1-1/16	C89462
	17 .1730	2-3/16	1-1/8	C89463
	16 .1770	2-3/16	1-1/8	C89464
	15 .1800	2-3/16	1-1/8	C89465
	14 .1820	2-3/16	1-1/8	C89466
	13 .1850	2-3/16	1-1/8	C89467
3/16	.1875	2-3/16	1-1/8	C89468
	12 .1890	2-1/4	1-3/16	C89469
	11 .1910	2-1/4	1-3/16	C89470
	10 .1935	2-1/4	1-3/16	C89471
	9 .1960	2-1/4	1-3/16	C89472
	8 .1990	2-1/4	1-3/16	C89473
	7 .2010	2-1/4	1-3/16	C89474
13/64	.2031	2-1/4	1-3/16	C89475
	6 .2040	2-3/8	1-1/4	C89476
	5 .2055	2-3/8	1-1/4	C89477
	4 .2090	2-3/8	1-1/4	C89478
	3 .2130	2-3/8	1-1/4	C89479
7/32	.2188	2-3/8	1-1/4	C89480
	2 .2210	2-7/16	1-5/16	C89481
	1 .2280	2-7/16	1-5/16	C89482
15/64	.2344	2-7/16	1-5/16	C89483
1/4	.2500	2-1/2	1-3/8	C89484
17/64	.2656	2-5/8	1-7/16	C89485
9/32	.2812	2-11/16	1-1/2	C89486
19/64	.2969	2-3/4	1-9/16	C89487
5/16	.3125	2-13/16	1-5/8	C89488
21/64	.3281	2-15/16	1-11/16	C89489
11/32	.3438	3	1-11/16	C89490
23/64	.3594	3-1/16	1-3/4	C89491
3/8	.3750	3-1/8	1-13/16	C89492
25/64	.3906	3-1/4	1-7/8	C89493
13/32	.4062	3-5/16	1-15/16	C89494
27/64	.4219	3-3/8	2	C89495
7/16	.4375	3-7/16	2-1/16	C89496
29/64	.4531	3-9/16	2-1/8	C89497
15/32	.4688	3-5/8	2-1/8	C89498
31/64	.4844	3-11/16	2-3/16	C89499
1/2	.5000	3-3/4	2-1/4	C89500

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				>45
Bright	☆	★	☆	★	★			☆	☆	★			★

☆ = Best Performance ★ = Acceptable

Note

Operating parameters begin on page 121.

Carbide


118° 4-Facet

Helix Low 10° to 20°

Straight Shank

Surface Treatment

Bright

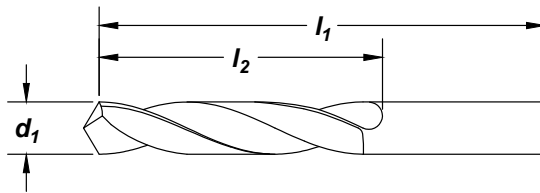
Feature:

Run at 2-3 times SFM over HSS drills.

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number
d ₁	wire				
fraction					1727
1/32		0.0312	1.250	0.313	C89501
	60	0.0400	1.500	0.750	C89502
	59	0.0410	1.500	0.750	C89503
	58	0.0420	1.500	0.750	C89504
	57	0.0430	1.500	0.750	C89505
	56	0.0465	1.500	0.750	C89506
3/64		0.0469	1.500	0.750	C89507
	55	0.0520	1.500	0.750	C89508
	54	0.0550	1.500	0.750	C89509
	53	0.0595	1.500	0.750	C47517
1/16		0.0625	1.500	0.750	C47519
	52	0.0635	1.500	0.750	C89512
	51	0.0670	1.500	0.750	C89513
	50	0.0700	1.750	0.875	C47526
	49	0.0730	1.750	0.875	C89515
	48	0.0760	1.750	0.875	C89516
5/64		0.0781	1.750	0.875	C89517
	47	0.0785	1.750	0.875	C89518
	46	0.0810	1.750	0.875	C89519
	45	0.0820	1.750	0.875	C89520
	44	0.0860	2.000	1.000	C89521
	43	0.0890	2.000	1.000	C89522
	42	0.0935	2.000	1.000	C89523
3/32		0.0938	2.000	1.000	C47548
	41	0.0960	2.000	1.000	C89525
	40	0.0980	2.000	1.000	C47552
	39	0.0995	2.250	1.250	C89527
	38	0.1015	2.250	1.250	C89528
	37	0.1040	2.250	1.250	C89529
	36	0.1065	2.250	1.250	C89530
7/64		0.1094	2.250	1.250	C47561

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number
d ₁	wire				
fraction					1727
	35	0.1100	2.250	1.250	C89532
	34	0.1110	2.250	1.250	C89533
	33	0.1130	2.250	1.250	C89534
	32	0.1160	2.250	1.250	C89535
	31	0.1200	2.250	1.250	C89536
1/8		0.1250	2.250	1.250	C47571
	30	0.1285	2.500	1.375	C47574
	29	0.1360	2.500	1.375	C89539
	28	0.1405	2.500	1.375	C89540
9/64		0.1406	2.500	1.375	C47580
	27	0.1440	2.500	1.375	C47582
	26	0.1470	2.500	1.375	C89543
	25	0.1495	2.500	1.375	C89544
	24	0.1520	2.500	1.375	C89545
	23	0.1540	2.500	1.375	C89546
5/32		0.1562	2.500	1.375	C47591
	22	0.1570	2.500	1.375	C89548
	21	0.1590	2.500	1.375	C89549
	20	0.1610	2.500	1.375	C89550
	19	0.1660	2.750	1.625	C89551
	18	0.1695	2.750	1.625	C89552
11/64		0.1719	2.750	1.625	C47602
	17	0.1730	2.750	1.625	C89554
	16	0.1770	2.750	1.625	C89555
	15	0.1800	2.750	1.625	C89556
	14	0.1820	2.750	1.625	C89557
	13	0.1850	2.750	1.625	C89558
3/16		0.1875	2.750	1.625	C47613
	12	0.1890	2.750	1.625	C89560
	11	0.1910	2.750	1.625	C89561
	10	0.1935	2.750	1.625	C47618

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	★			★		★		☆		☆			
☆ = Best Performance ★ = Acceptable													

Heavy Duty

Style: **1727** (continued)

Jobber Length

Carbide

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number
d ₁	wire				
fraction					1727
	9	0.1960	3.000	1.750	C89563
	8	0.1990	3.000	1.750	C89564
	7	0.2010	3.000	1.750	C47623
13/64		0.2031	3.000	1.750	C89566
	6	0.2040	3.000	1.750	C47625
	5	0.2055	3.000	1.750	C89568
	4	0.2090	3.000	1.750	C89569
	3	0.2130	3.000	1.750	C89570
7/32		0.2188	3.000	1.750	C47634
	2	0.2210	3.000	1.750	C89572
	1	0.2280	3.000	1.750	C89573
	A	0.2340	3.250	2.000	C89574
15/64		0.2344	3.250	2.000	C89575
	B	0.2380	3.250	2.000	C89576
	C	0.2420	3.250	2.000	C89577
	D	0.2460	3.250	2.000	C89578
1/4	E	0.2500	3.250	2.000	C47648
	F	0.2570	3.250	2.000	C89580
	G	0.2610	3.500	2.125	C89581
17/64		0.2656	3.500	2.125	C89582
	H	0.2660	3.500	2.125	C89583
	I	0.2720	3.500	2.125	C89584
	J	0.2770	3.500	2.125	C89585
	K	0.2810	3.500	2.125	C89586
9/32		0.2812	3.500	2.125	C89587
	L	0.2900	3.500	2.125	C89588
	M	0.2950	4.000	2.375	C89589

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number
d ₁	wire				
fraction					1727
19/64		0.2969	4.000	2.375	C89590
	N	0.3020	4.000	2.375	C89591
5/16		0.3125	4.000	2.375	C47671
	O	0.3160	4.000	2.375	C89593
	P	0.3230	4.000	2.375	C89594
21/64		0.3281	4.000	2.500	C89595
	Q	0.3320	4.000	2.500	C89596
11/32		0.3438	4.000	2.500	C89597
	S	0.3480	4.000	2.500	C89598
	T	0.3580	4.000	2.500	C89599
23/64		0.3594	4.250	2.500	C89600
	U	0.3680	4.250	2.750	C89601
3/8		0.3750	4.250	2.750	C47694
	V	0.3770	4.250	2.750	C89603
	W	0.3860	4.500	2.875	C89604
25/64		0.3906	4.500	2.875	C89605
	X	0.3970	4.500	2.875	C89606
	Y	0.4040	4.500	2.875	C89607
13/32		0.4062	4.500	2.875	C89608
	Z	0.4130	4.500	2.875	C89609
27/64		0.4219	4.500	2.875	C89610
7/16		0.4375	4.500	2.875	C47708
29/64		0.4531	4.750	3.000	C89612
15/32		0.4688	4.750	3.000	C89613
31/64		0.4844	4.750	3.000	C89614
1/2		0.5000	4.750	3.000	C47718

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	◆		◆		◆		☆		☆			

☆ = Best Performance ◆ = Acceptable

Style: 2745
**Carbide-Tipped
Heavy Duty, Tanged**
Note

Operating parameters begin on page 121.


 HSS
Carbide
Tipped


 118°


 Helix
Regular
21° to 34°


 Straight
Shank Tang

 Surface
Treatment

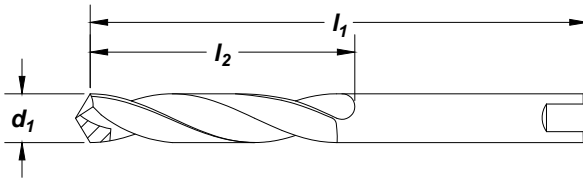
 Bright



Taper Length

Carbide

Feature:

Run at carbide speeds with the flexibility of a HSS body and shank.

drill diameter d_1	decimal equiv.	overall length l_1 (in)	flute length l_2 (in)	order number 2745
1/8	.1250	5.125	2.750	C49017
5/32	.1562	5.375	3.000	C49029
3/16	.1875	5.750	3.375	C49041
7/32	.2188	6.000	3.625	C49052
1/4	.2500	6.125	3.750	C49064
9/32	.2812	6.250	3.875	C49078
5/16	.3125	6.375	4.000	C49087
11/32	.3438	6.500	4.125	C49098
3/8	.3750	6.750	4.250	C49110
13/32	.4062	7.000	4.375	C49119
27/64	.4219	7.250	4.625	C49121
7/16	.4375	7.250	4.625	C49124
15/32	.4688	7.500	4.750	C49129
1/2	.5000	7.750	4.750	C49134
17/32	.5312	8.000	4.750	C49139
9/16	.5625	8.250	4.875	C49145
5/8	.6250	8.750	4.875	C49155

Tang Specifications


shank diameter (inches)		tang dimensions (inches)	
from	to	width A	width B
1/8	3/16	.092	.281
over 3/16	1/4	.120	.312
over 1/4	5/16	.160	.344
over 5/16	3/8	.201	.375
over 3/8	15/32	.241	.438
over 15/32	9/16	.300	.500
over 9/16	21/32	.370	.563
over 21/32	3/4	.440	.625
over 3/4	7/8	.511	.688
over 7/8	1	.605	.750
over 1	1-3/16	.696	.813
over 1-3/16	1-3/8	.813	.875

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆				☆	◆	☆			


☆ = Best Performance ◆ = Acceptable

General Purpose

Style: 2510
Note
Operating parameters begin on page 121.
ASME
B94.11M

DIN
340

HSS

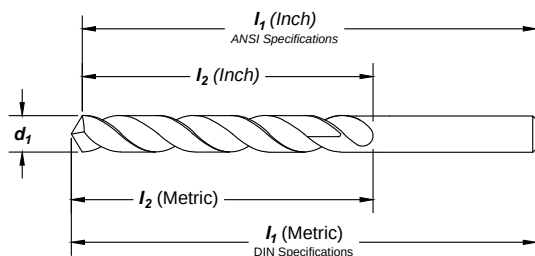Surface Treatment
Black Oxide

Feature:

General purpose with longer length for added reach.

drill diameter			overall length		flute length		order number
fraction	d1 wire	decimal equiv.	I1		I2		2510 black oxide
	mm		in	mm	in	mm	
	1.0	.0394		56.00		33.00	C08592
	60	.0400	2.250		1.125		C08593
	59	.0410	2.250		1.125		C08594
	58	.0420	2.250		1.125		C08596
	57	.0430	2.250		1.125		C08597
	56	.0465	2.250		1.125		C08600
3/64		.0469	2.250		1.125		C08601
	1.25	.0492		65.00		41.00	C08603
	55	.0520	3.000		1.750		C08605
	54	.0550	3.000		1.750		C08607
	53	.0595	3.000		1.750		C08611
	1.55	.0610		70.00		45.00	C08612
1/16		.0625	3.000		1.750		C08613
	52	.0635	3.750		2.000		C08615
	51	.0670	3.750		2.000		C08618
	50	.0700	3.750		2.000		C08620
	49	.0730	3.750		2.000		C08623
	48	.0760	3.750		2.000		C08625
5/64		.0781	3.750		2.000		C08627
	47	.0785	4.250		2.250		C08628
	2.0	.0787		85.00		56.00	C08629
	46	.0810	4.250		2.250		C08631
	45	.0820	4.250		2.250		C08632
	44	.0860	4.250		2.250		C08635
	43	.0890	4.250		2.250		C08638
	2.35	.0925		90.00		59.00	C08640
	42	.0935	4.250		2.250		C08641
3/32		.0938	4.250		2.250		C08642
	2.4	.0945		95.00		62.00	C08643
	41	.0960	4.625		2.500		C08644
	40	.0980	4.625		2.500		C08646
	39	.0995	4.625		2.500		C08648
	38	.1015	4.625		2.500		C08649
	37	.1040	4.625		2.500		C08651
	36	.1065	4.625		2.500		C08653
7/64		.1094	4.625		2.500		C08655
	35	.1100	5.125		2.750		C08656
	2.8	.1102		100.00		66.00	C08578
	34	.1110	5.125		2.750		C08658
	33	.1130	5.125		2.750		C08659
	32	.1160	5.125		2.750		C08661
	3.0	.1181		100.00		66.00	C08662

continued on next page

Style: 2510 (continued)
General Purpose

drill diameter			overall length		flute length		order number
fraction	d ₁ wire	mm	decimal equiv.	I ₁ in mm	I ₂ in mm		2510 black oxide
1/8	31		.1200	5.125	2.750		C08663
			.1250	5.125	2.750		C08665
		3.2	.1260			69.00	C08666
	30		.1285	5.375	3.000		C08668
		3.3	.1299			69.00	C08669
	29		.1360	5.375	3.000		C08671
		3.5	.1378			73.00	C08582
	28		.1405	5.375	3.000		C08673
	9/64		.1406	5.375	3.000		C08674
	27		.1440	5.375	3.000		C08676
	26		.1470	5.375	3.000		C08678
	25		.1495	5.375	3.000		C08680
	24		.1520	5.375	3.000		C08682
	23		.1540	5.375	3.000		C08684
	5/32		.1562	5.375	3.000		C08685
	22		.1570	5.750	3.375		C08686
		4.0	.1575			78.00	C08687
	21		.1590	5.750	3.375		C08688
	20		.1610	5.750	3.375		C08689
		4.2	.1654			78.00	C08587
	19		.1660	5.750	3.375		C08692
	18		.1695	5.750	3.375		C08695
	11/64		.1719	5.750	3.375		C08696
	17		.1730	5.750	3.375		C08697
	16		.1770	5.750	3.375		C08699
	15		.1800	5.750	3.375		C08701
	14		.1820	5.750	3.375		C08703
	13		.1850	5.750	3.375		C08704
	3/16		.1875	5.750	3.375		C08707
	12		.1890	6.000	3.625		C08708
	11		.1910	6.000	3.625		C08710
	10		.1935	6.000	3.625		C08712
	9		.1960	6.000	3.625		C08713
		5.0	.1969			87.00	C08714
	8		.1990	6.000	3.625		C08715
	7		.2010	6.000	3.625		C08717
	13/64		.2031	6.000	3.625		C08718
	6		.2040	6.000	3.625		C08719
	5		.2055	6.000	3.625		C08721
	4		.2090	6.000	3.625		C08724
	3		.2130	6.000	3.625		C08726
	7/32		.2188	6.000	3.625		C08728
	2		.2210	6.125	3.750		C08730
	1		.2280	6.125	3.750		C08733
		5.8	.2283			91.00	C08608
		5.9	.2323			91.00	C08735
	15/64		.2344	6.125	3.750		C08737

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆				☆	☆				
☆ = Best Performance ◆ = Acceptable													

General Purpose

Style: 2510 (continued)

Taper Length

High Speed Steel

drill diameter		decimal equiv.	overall length		flute length		order number
fraction	d ₁ wire		l ₁		l ₂		2510 black oxide
	mm		in	mm	in	mm	
	6.0	.2362		139.00		91.00	C08738
	D	.2460	6.125		3.750		C08743
	6.3	.2480		148.00		97.00	C08745
1/4	E	.2500	6.125		3.750		C08746
	6.5	.2559		148.00		97.00	C08749
	F	.2570	6.250		3.875		C08750
17/64		.2656	6.250		3.875		C08752
	6.8	.2677		156.00		102.00	C08755
	I	.2720	6.250		3.875		C08757
	7.0	.2756		156.00		102.00	C08758
	J	.2770	6.250		3.875		C08759
9/32		.2812	6.250		3.875		C08766
	7.5	.2953		156.00		102.00	C08609
19/64		.2969	6.375		4.000		C08770
	N	.3020	6.375		4.000		C08772
5/16		.3125	6.375		4.000		C08777
	8.0	.3150		165.00		109.00	C08778
	O	.3160	6.500		4.125		C08779
	P	.3230	6.500		4.125		C08782
21/64		.3281	6.500		4.125		C08785
	Q	.3320	6.500		4.125		C08787
	8.5	.3346		165.00		109.00	C08788
	R	.3390	6.500		4.125		C08790
11/32		.3438	6.500		4.125		C08792
	9.0	.3543		175.00		115.00	C08797
23/64		.3594	6.750		4.250		C08800
3/8		.3750	6.750		4.250		C08807
	V	.3770	7.000		4.375		C08808
25/64		.3906	7.000		4.375		C08815
	10.0	.3937		184.00		121.00	C08816
	10.2	.4016		184.00		121.00	C08818
13/32		.4062	7.000		4.375		C08821
	10.5	.4134		184.00		121.00	C08823
27/64		.4219	7.250		4.625		C08824
	11.0	.4331		195.00		128.00	C08826
7/16		.4375	7.250		4.625		C08827
	11.2	.4409		195.00		128.00	C08828
29/64		.4531	7.500		4.750		C08830
15/32		.4688	7.500	190.50	4.750	120.65	C08832
	12.0	.4724		205.00		134.00	C08833
31/64		.4844	7.750		4.750		C08835
	12.5	.4921		205.00		134.00	C08610
1/2		.5000	7.750		4.750		C08837
	13.0	.5118		205.00		134.00	C08839
33/64		.5156	8.000		4.750		C08840
17/32		.5312	8.000		4.750		C08842
35/64		.5469	8.250		4.875		C08845
	14.0	.5512		214.00		140.00	C08846
9/16		.5625	8.250		4.875		C08848
37/64		.5781	8.750		4.875		C08850
	15.0	.5906		220.00		144.00	C08852
19/32		.5938	8.750		4.875		C08853
39/64		.6094	8.750		4.875		C08855
5/8		.6250	8.750		4.875		C08858
	16.0	.6299		227.00		149.00	C08859
41/64		.6406	9.000		5.125		C08861

continued on next page

Style: 2510 (continued)
General Purpose

drill diameter			overall length		flute length		order number
fraction	d ₁ wire	mm	decimal equiv.	l ₁ in mm	l ₂ in mm		2510 black oxide
21/32			.6562	9.000	5.125		C08863
		17.0	.6693			149.00	C08865
43/64			.6719	9.250	5.375		C08866
11/16			.6875	9.250	5.375		C08868
45/64			.7031	9.500	5.625		C08870
		18.0	.7087			143.00	C08871
23/32			.7188	9.500	5.625		C08872
47/64			.7344	9.750	5.875		C08874
3/4			.7500	9.750	5.875		C08876
49/64			.7656	9.875	6.000		C08877
25/32			.7812	9.875	6.000		C08879
		20.0	.7874			156.00	C08880
51/64			.7969	10.000	6.125		C08881
13/16			.8125	10.000	6.125		C08883
53/64			.8281	10.000	6.125		C08885
27/32			.8438	10.000	6.125		C08886
55/64			.8594	10.000	6.125		C08888
7/8			.8750	10.000	6.125		C08890
57/64			.8906	10.000	6.125		C08892
29/32			.9062	10.000	6.125		C08894
59/64			.9219	10.750	6.125		C08895
15/16			.9375	10.750	6.125		C08897
61/64			.9531	11.000	6.375		C08899
31/32			.9688	11.000	6.375		C08901
63/64			.9844	11.000	6.375		C08903
1			1.0000	11.000	6.375		C08904

Taper Length

High Speed Steel

SET
Style: 2510
General Purpose

no. of pieces	surface treatment	size range	order number
29	black oxide	1/16" through 1/2" x 1/64"	2510 C00962



Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Black Oxide	☆		☆					☆	☆			

☆ = Best Performance ◆ = Acceptable

High Helix

Style: **2550**

Note

Operating parameters begin on page 121.

ASME
B94.11M

HSS


118°

Helix
High
35° to 45°

Straight
Shank

Surface
Treatment

Bright

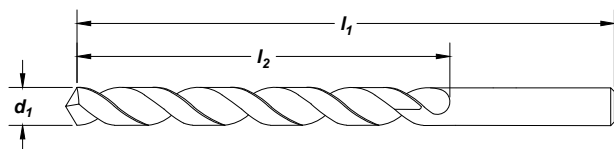

Feature:

Fast spiral aids chip removal in softer materials.

drill diameter		decimal equiv.	overall length		flute length	order number
fraction	d1 wire		l1 (in)	l2 (in)		
1/32		.0312	1.625	.750		C09060
	60	.0400	2.250	1.125		C09062
	57	.0430	2.250	1.125		C09066
	56	.0465	2.250	1.125		C09069
3/64		.0469	2.250	1.125		C09070
	55	.0520	3.000	1.750		C09074
	54	.0550	3.000	1.750		C09076
	53	.0595	3.000	1.750		C09080
1/16		.0625	3.000	1.750		C09082
	51	.0670	3.750	2.000		C09087
	50	.0700	3.750	2.000		C09089
	49	.0730	3.750	2.000		C09092
	48	.0760	3.750	2.000		C09094
5/64		.0781	3.750	2.000		C09096
	47	.0785	4.250	2.250		C09097
	46	.0810	4.250	2.250		C09100
	45	.0820	4.250	2.250		C09101
	44	.0860	4.250	2.250		C09104
	43	.0890	4.250	2.250		C09107
	42	.0935	4.250	2.250		C09110
		.0938	4.250	2.250		C09111
3/32	41	.0960	4.625	2.500		C09113
	40	.0980	4.625	2.500		C09115
	39	.0995	4.625	2.500		C09117
	38	.1015	4.625	2.500		C09118
	37	.1040	4.625	2.500		C09120
	36	.1065	4.625	2.500		C09122
		.1094	4.625	2.500		C09124
	35	.1100	5.125	2.750		C09125
7/64	33	.1130	5.125	2.750		C09128
	32	.1160	5.125	2.750		C09130
	31	.1200	5.125	2.750		C09132
		.1250	5.125	2.750		C09134
1/8	30	.1285	5.375	3.000		C09137
	29	.1360	5.375	3.000		C09140
		.1406	5.375	3.000		C09143
9/64	27	.1440	5.375	3.000		C09145
	26	.1470	5.375	3.000		C09147
		.1562	5.375	3.000		C09154
5/32	21	.1590	5.750	3.375		C09157
	20	.1610	5.750	3.375		C09158

continued on next page

drill diameter		decimal equiv.	overall length		flute length		order number
fraction	d ₁ wire		l ₁ (in)	l ₂ (in)			
11/64		.1719	5.750	3.375			C09165
	16	.1770	5.750	3.375			C09168
	15	.1800	5.750	3.375			C09170
3/16		.1875	5.750	3.375			C09176
	11	.1910	6.000	3.625			C09179
	10	.1935	6.000	3.625			C09181
	8	.1990	6.000	3.625			C09184
	7	.2010	6.000	3.625			C09186
13/64		.2031	6.000	3.625			C09187
	3	.2130	6.000	3.625			C09195
7/32		.2188	6.000	3.625			C09197
	1	.2280	6.125	3.750			C09202
15/64		.2344	6.125	3.750			C09205
1/4		.2500	6.125	3.750			C09211
5/16		.3125	6.375	4.000			C09234
3/8		.3750	6.750	4.250			C09257
7/16		.4375	7.250	4.625			C09271
1/2		.5000	7.750	4.750			C09281

Taper Length

High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	◆		☆						☆			

☆ = Best Performance

◆ = Acceptable

Note

Operating parameters begin on page 121.


ASME
B94.11M

M42
Cobalt



Surface
Treatment

Straw
Oxide

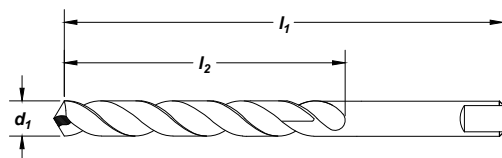
Feature:

Highly heat resistant substrate for tough to machine materials.

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 2513
1/8	.1250	5.125	2.750	C14873
9/64	.1406	5.375	3.000	C14882
5/32	.1562	5.375	3.125	C14893
3/16	.1875	5.750	3.375	C14915
7/32	.2188	6.000	3.625	C14935
1/4	.2500	6.125	3.750	C14954
9/32	.2812	6.250	3.875	C14973
5/16	.3125	6.375	4.000	C14984
11/32	.3438	6.500	4.125	C14999
23/64	.3594	6.750	4.250	C15007
3/8	.3750	6.750	4.250	C15014
13/32	.4062	7.000	4.375	C15028
27/64	.4219	7.250	4.625	C15031
7/16	.4375	7.250	4.625	C15034
29/64	.4531	7.500	4.750	C15037
15/32	.4688	7.500	4.750	C15039
31/64	.4844	7.750	4.750	C15042
1/2	.5000	7.750	4.750	C15044

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Straw		★		☆		★	☆	★	☆				
☆ = Best Performance ★ = Acceptable													

Note


Operating parameters begin on page 121.

ASME
B94.11M

HSS



Surface
Treatment

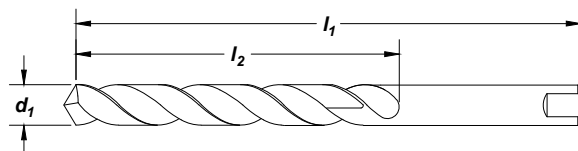

Taper Length

High Speed Steel

Feature:

Heavy duty design with long length for extended reach application.

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 2540
1/8	.1250	5.125	3.375	C09443
5/32	.1562	5.375	3.750	C09455
3/16	.1875	5.750	4.125	C09467
7/32	.2188	6.000	4.375	C09478
1/4	.2500	6.125	4.813	C09490
9/32	.2812	6.250	5.000	C09504
5/16	.3125	6.375	5.125	C09513
11/32	.3438	6.500	5.250	C09524
3/8	.3750	6.750	5.375	C09536
13/32	.4062	7.000	5.625	C09545
7/16	.4375	7.250	5.688	C09550
29/64	.4531	7.500	5.750	C09553
15/32	.4688	7.500	5.750	C09555
1/2	.5000	7.750	5.750	C09560
33/64	.5156	8.000	6.000	C09563
17/32	.5312	8.000	6.000	C09565
9/16	.5625	8.250	6.250	C09571
19/32	.5938	8.750	6.500	C09576
5/8	.6250	8.750	6.500	C09581



Heavy Duty Automotive Tang Taper Length Drills

- These drills feature a 20% longer flute length than regular taper length drills for increased regrinds and reach.

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Black Oxide		★		☆		☆		★	☆				
☆ = Best Performance ★ = Acceptable													

Note

Operating parameters begin on page 121.
Adjust the parameters as follows:
double the given feed rate.

ASME
B94.11M

HSS

118° K-Notch


Helix
High
35° to 45°

Straight
Shank Tang

Surface
Treatment

Bright

TiN

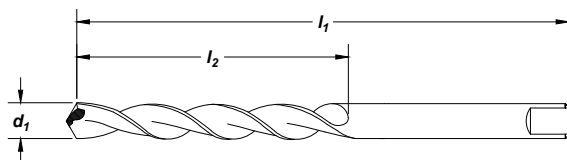

Feature:

Excels in deep hole drilling without pecking in softer, free machining materials. Drill up to 10x diameter without pecking. Taper length for extended reach. Standard with automotive tang.

drill diameter					order number	
fraction	d ₁	decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	2565	2565-TN
	wire/let				bright	TiN
1/16		.0625	3.000	1.750	C16058	C05105
	50	.0700	3.750	2.000	C16269	—
5/64		.0781	3.750	2.000	C16059	—
	47	.0785	4.250	2.250	C16266	—
	43	.0890	4.250	2.250	C16262	—
	42	.0935	4.250	2.250	C16261	—
3/32		.0938	4.250	2.250	C16060	C05118
	40	.0980	4.625	2.500	—	C05120
	37	.1040	4.625	2.500	C16256	C05123
	36	.1065	4.625	2.500	C16255	—
7/64		.1094	4.625	2.500	C16061	—
	33	.1130	5.125	2.750	C16252	—
1/8		.1250	5.125	2.750	C16062	C05131
	30	.1285	5.375	3.000	C16249	—
	29	.1360	5.375	3.000	C16248	—
9/64		.1406	5.375	3.000	C16063	—
	26	.1470	5.375	3.000	C16245	—
	25	.1495	5.375	3.000	C16244	—
5/32		.1562	5.375	3.000	C16064	C05141
	21	.1590	5.750	3.375	C16240	—
	20	.1610	5.750	3.375	C16239	—
11/64		.1719	5.750	3.375	C16065	—
	16	.1730	5.750	3.375	C16235	—
	15	.1770	5.750	3.375	C16234	—
	13	.1820	5.750	3.375	—	C05152
3/16		.1875	5.750	3.375	C16066	C05153
	12	.1890	6.000	3.625	—	C05154
	10	.1935	6.000	3.625	C16229	—
	9	.1960	6.000	3.625	C16228	—
	7	.2010	6.000	3.625	C16226	—
13/64		.2031	6.000	3.625	C16067	C05160
	3	.2130	6.000	3.625	C16222	—
7/32		.2188	6.000	3.625	C16068	C05165
15/64		.2344	6.125	3.750	C16069	—
1/4	E	.2500	6.125	3.750	C16070	C05173
17/64		.2656	6.250	3.875	C16071	C05176
9/32		.2812	6.250	3.875	C16072	C05181

continued on next page

drill diameter		decimal equiv.	overall length l ₁ (in)	flute length l ₂ (in)	order number	
fraction	d ₁ wire/let				2565 bright	2565-TN TiN
19/64		.2969	6.375	4.000	C16073	C05184
5/16		.3125	6.375	4.000	C16074	—
21/64		.3281	6.500	4.125	C16075	C05187
11/32		.3438	6.500	4.125	C16076	C05190
23/64		.3594	6.750	4.250	C16077	C05193
3/8		.3750	6.750	4.250	C16078	C05195
25/64		.3906	7.000	4.375	C16079	C05198
13/32		.4062	7.000	4.375	C16080	C05201
27/64		.4219	7.250	4.625	C16081	C05203
7/16		.4375	7.250	4.625	C16082	C05204
29/64		.4531	7.500	4.750	C16083	C05205
15/32		.4688	7.500	4.750	C16084	C05206
31/64		.4844	7.750	4.750	C16085	C05207
1/2		.5000	7.750	4.750	C16086	—

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32	☆			>45
	Bright	◆		◆		◆				☆			
	TiN	☆		☆		☆							

☆ = Best Performance

◆ = Acceptable

Note

Operating parameters begin on page 121.


ASME
B94.11M

DIN
340

M42
Cobalt



Surface
Treatment

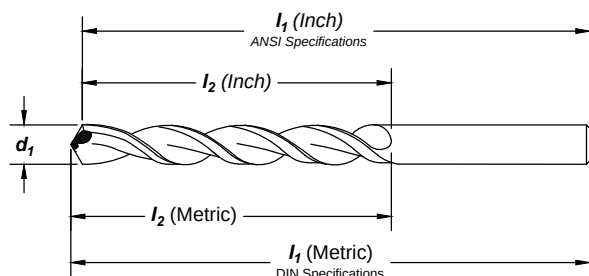
Feature:

Effective deep hole drilling in a wide array of materials. Available coating for extended tool life and productivity. Longer design for deeper holes and extended reach.

drill diameter			overall length		flute length		order number		
d1			l1		l2		2575	2575-TN	2575-TA
fraction	wire/let	mm	in	mm	in	mm	straw oxide	TiN	TiAlN
1/16		*1.50		76.00		44.00	C16805	C16914	C18805
							C16776	C16885	—
	52		3.750		2.000		C16775	C16884	—
		1.70		76.00		50.00	—	—	C18807
	51		3.750		2.000		C16774	C16883	—
	50		3.750		2.000		C16773	C16882	—
	49		3.750		2.000		C16772	C16881	—
	48		3.750		2.000		C16771	C16880	—
5/64							C16777	C16886	—
	47		4.250		2.250		C16770	C16879	—
		2.00		108.00		57.00	C16806	C16915	C18810
							C16769	C16878	—
	46		4.250		2.250		C16768	C16877	—
	45		4.250		2.250		C16767	C16876	—
	44		4.250		2.250		—	—	—
		2.20		90.00		59.00	—	—	C18812
							C16766	C16875	—
	43		4.250		2.250		C16765	C16874	—
	42		4.250		2.250		C16778	C16887	—
	41		4.625		2.500		C16764	C16873	—
	40		4.625		2.500		C16763	C16872	—
		2.50		117.00		64.00	C16807	C16916	C18815
	39		4.625		2.500		C16762	C16871	—
	38		4.625		2.500		C16761	C16870	—
	37		4.625		2.500		C16760	C16869	—
	36		4.625		2.500		C16759	C16868	—
7/64							C16779	C16888	—
	35		5.125		2.750		C16758	C16867	—
	34		5.125		2.750		C16757	C16866	—
	33		5.125		2.750		C16756	C16865	—
	32		5.125		2.750		C16755	C16864	—
		3.00		130.00		70.00	C16808	C16917	—
	31		5.125		2.750		C16754	C16863	—
	30		5.375		3.000		C16780	C16889	—
	29		5.375		3.000		C16753	C16862	—
		3.50		137.00		76.00	C16752	C16861	—
							C16809	C16918	—

*Not split point.

continued on next page

drill diameter			overall length		flute length		order number		
d ₁			l ₁		l ₂		2575	2575-TN	2575-TA
fraction	wire/let	mm	in	mm	in	mm	straw oxide	TiN	TiAlN
9/64	28		.1405	5.375	3.000		C16751	C16860	-
			.1406	5.375	3.000		C16781	C16890	-
	27		.1440	5.375	3.000		C16750	C16859	-
	26		.1470	5.375	3.000		C16749	C16858	-
	25		.1495	5.375	3.000		C16748	C16857	-
5/32	24		.1520	5.375	3.000		C16747	C16856	-
	23		.1540	5.375	3.000		C16746	C16855	-
			.1562	5.375	3.000		C16782	C16891	-
	22		.1570	5.750	3.375		C16745	C16854	-
		4.00	.1575	146.00	86.00		C16810	C16919	-
11/64	21		.1590	5.750	3.375		C16744	C16853	-
	20		.1610	5.750	3.375		C16743	C16852	-
	19		.1660	5.750	3.375		C16742	C16851	-
	18		.1695	5.750	3.375		C16741	C16850	-
			.1719	5.750	3.375		C16783	C16892	-
3/16	17		.1730	5.750	3.375		C16740	C16849	-
	16		.1770	5.750	3.375		C16739	C16848	-
		4.50	.1772	146.00	86.00		C16811	C16920	-
	15		.1800	5.750	3.375		C16738	C16847	-
	14		.1820	5.750	3.375		C16737	C16846	-
13/64	13		.1850	5.750	3.375		C16736	C16845	-
			.1875	5.750	3.375		C16784	C16893	-
	12		.1890	6.000	3.625		C16735	C16844	-
	11		.1910	6.000	3.625		C16734	C16843	-
	10		.1935	6.000	3.625		C16733	C16842	-
7/32	9		.1960	6.000	3.625		C16732	C16841	-
		5.00	.1969	152.00	92.00		C16812	C16921	-
	8		.1990	6.000	3.625		C16731	C16840	-
	7		.2010	6.000	3.625		C16730	C16839	-
			.2031	6.000	3.625		C16785	C16894	-
15/64	6		.2040	6.000	3.625		C16729	C16838	-
		5.20	.2047	152.00	92.00		C16813	C16922	-
	5		.2055	6.000	3.625		C16728	C16837	-
	4		.2090	6.000	3.625		C16727	C16836	-
	3		.2130	6.000	3.625		C16726	C16835	-
17/64		5.50	.2165	152.00	92.00		C16814	C16923	-
		5.60	.2188	6.000	3.625		C16786	C16895	-
	2		.2210	6.125	3.750		C16725	C16834	-
	1		.2280	6.125	3.750		C16724	C16833	-
			.2344	6.125	3.750		C16787	C16896	-
1/4		6.00	.2362	156.00	95.00		C16816	C16925	-
			.2500	6.125	3.750		C16788	C16897	-
		6.50	.2559	159.00	98.00		C16817	C16926	-
17/64			.2656	6.250	3.875		C16789	C16898	-
		6.80	.2677	159.00	98.00		C16818	C16927	-

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Straw										☆			
TiN	◆		◆		◆	◆		◆	◆				
TiAlN	☆		☆		☆	☆		☆	☆				

☆ = Best Performance ◆ = Acceptable

drill diameter			overall length		flute length		order number		
d ₁			l ₁		l ₂		2575	2575-TN	2575-TA
fraction	wire/let	mm	in	mm	in	mm	straw oxide	TiN	TiAlN
9/32		7.00		159.00		98.00	C16819	C16928	—
							C16790	C16899	—
19/64		7.50		162.00		102.00	C16820	C16929	—
							C16791	C16900	—
5/16							C16792	C16901	—
							C16821	C16930	—
		8.00		165.00		105.00	C16822	C16931	—
							C16793	C16902	—
21/64		8.20		165.00		105.00	C16823	C16932	—
							C16824	C16933	—
		8.50		165.00		105.00	C16794	C16903	—
							C16825	C16934	—
11/32		8.60		165.00		105.00	C16795	C16904	—
							C16826	C16935	—
							C16796	C16905	—
							C16797	C16906	—
23/64		9.00		171.00		108.00	C16827	C16936	—
							C16798	C16907	—
		9.50		171.00		108.00	C16828	C16937	—
							C16799	C16908	—
3/8							C16829	C16938	—
							C16800	C16909	—
25/64							C16830	C16939	—
							C16801	C16910	—
							C16802	C16911	—
							C16831	C16940	—
13/32		10.00		178.00		111.00	C16803	C16912	—
							C16832	C16941	—
							C16804	C16913	—
27/64		10.50		184.00		117.00			
7/16		11.00		184.00		117.00			
29/64		11.50		190.00		121.00			
15/32									
31/64		12.00		190.00		121.00			
1/2		12.50		190.00		121.00			

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Straw												
	TiN	★		★		★	★	★	★				
	TiAlN	★		★		★	★	★	★				

★ = Best Performance ◆ = Acceptable


Styles: 3957-6, 3957-12
Aircraft NAS 907, Type B
 6" & 12" Extension

Note

Operating parameters begin on page 121.


 Surface
Treatment

Bright

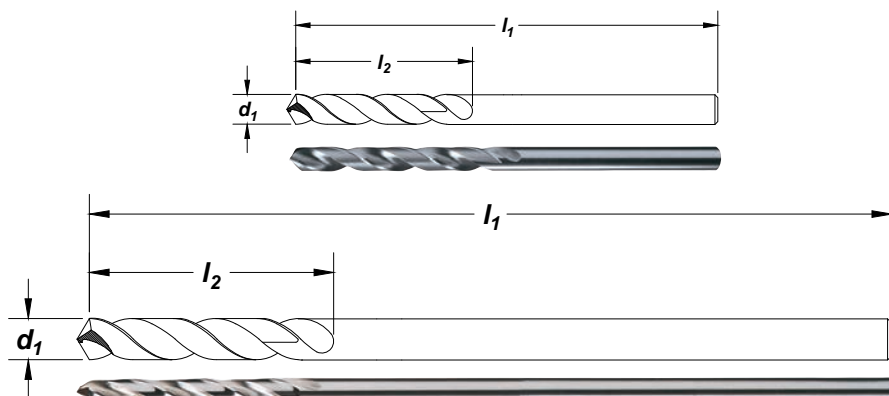
Feature:

Ideal for long reach drilling applications.

				order number		
drill diameter				3957-6	3957-12	
d ₁				overall length		flute length
fraction	wire/letter	decimal equiv.		l ₁ (6.0 in)	l ₁ (12.0 in)	l ₂ (in)
*3/64		.0469		C13100	—	.750
1/16		.0625		C13101	C13176	.875
	52	.0635		C13174	—	.875
	51	.0670		C13173	—	1.000
	50	.0700		C13172	—	1.000
	49	.0730		C13171	—	1.000
	48	.0760		C13170	—	1.000
5/64		.0781		C13102	C13177	1.000
	47	.0785		C13169	—	1.125
	46	.0810		C13168	—	1.125
	45	.0820		C13167	—	1.125
	44	.0860		C13166	—	1.250
	43	.0890		C13165	—	1.250
	42	.0935		C13164	—	1.250
3/32		.0938		C13103	C13178	1.250
	41	.0960		C13163	—	1.375
	40	.0980		C13162	C13244	1.375
	39	.0995		C13161	C13243	1.375
	38	.1015		C13160	—	1.438
	37	.1040		C13159	—	1.438
	36	.1065		C13158	—	1.438
7/64		.1094		C13104	C13179	1.500
	35	.1100		C13157	—	1.500
	34	.1110		C13156	—	1.500
	33	.1130		C13155	—	1.500
	32	.1160		C13154	—	1.625
	31	.1200		C13153	C13242	1.625
1/8		.1250		C13105	C13180	1.625
	30	.1285		C13152	C13241	1.625
	29	.1360		C13151	C13240	1.750
	28	.1405		C13150	C13239	1.750
9/64		.1406		C13106	C13181	1.750

*Not split point.

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆		◆		◆		☆			

☆ = Best Performance ◆ = Acceptable

drill diameter			order number		
d ₁			3957-6	3957-12	
fraction	wire/letter	decimal equiv.	overall length l ₁ (6.0 in)	overall length l ₁ (12.0 in)	flute length l ₂ (in)
	27	.1440	C13149	C13238	1.875
	26	.1470	C13148	C13237	1.875
	25	.1495	C13147	C13236	1.875
	24	.1520	C13146	C13235	2.000
	23	.1540	C13145	—	2.000
5/32		.1562	C13107	C13182	2.000
	22	.1570	C13144	—	2.000
	21	.1590	C13143	C13234	2.125
	20	.1610	C13142	C13233	2.125
	19	.1660	C13141	C13232	2.125
	18	.1695	C13140	—	2.125
11/64		.1719	C13108	C13183	2.125
	17	.1730	C13139	—	2.188
	16	.1770	C13138	C13231	2.188
	15	.1800	C13137	C13230	2.188
	14	.1820	C13136	—	2.188
	13	.1850	C13135	C13229	2.313
3/16		.1875	C13109	C13184	2.313
	12	.1890	C13134	C13228	2.313
	11	.1910	C13133	C13227	2.313
	10	.1935	C13132	C13226	2.438
	9	.1960	C13131	C13225	2.438
	8	.1990	C13130	C13224	2.438
	7	.2010	C13129	C13223	2.438
13/64		.2031	C13110	C13185	2.438
	6	.2040	C13128	C13222	2.500
	5	.2055	C13127	C13221	2.500
	4	.2090	C13126	—	2.500
	3	.2130	C13125	C13220	2.500
7/32		.2188	C13111	C13186	2.500
	2	.2210	C13124	C13219	2.625
	1	.2280	C13123	C13218	2.625
15/64		.2344	C13112	C13187	2.625
1/4	E	.2500	C13113	C13188	2.750
	F	.2570	C13122	—	2.875
17/64		.2656	—	C13189	2.625
9/32		.2812	C13114	C13190	3.063
19/64		.2969	—	C13191	3.063
5/16		.3125	C13115	C13192	3.188
	O	.3160	—	C13211	3.438
21/64		.3281	—	C13193	3.438
11/32		.3438	C13116	C13194	3.438
23/64		.3594	—	C13195	3.500
3/8		.3750	C13117	C13196	3.625
25/64		.3906	—	C13197	3.750
13/32		.4062	C13118	C13198	3.750
27/64		.4219	—	C13199	3.938
7/16		.4375	C13119	C13200	4.063
29/64		.4531	—	C13201	4.188
15/32		.4688	C13120	C13202	4.313
31/64		.4844	—	C13203	4.375
1/2		.5000	C13121	C13204	4.500

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆		◆		◆		☆			

☆ = Best Performance ◆ = Acceptable

Note
 Operating parameters begin on page 121.

M42
 Cobalt

NAS 907
 TYPE J

135° Split

Helix
 Regular
 21° to 34°


Straight
 Shank

Surface
 Treatment

Straw
 Oxide

Aircraft Extension

Cobalt

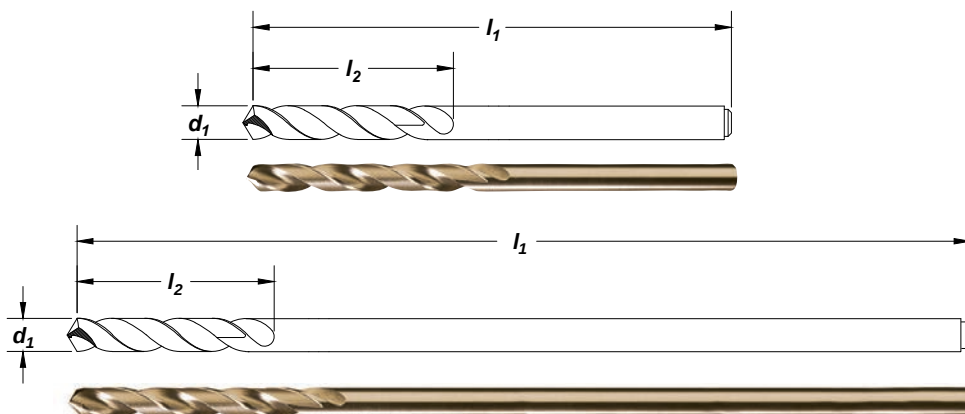

Feature:

Highly heat resistant substrate for tough to machine materials. Extended length for long reach applications.

drill diameter			order number		flute length l ₂ (in)
d ₁			3722-6	3722-12	
fraction	wire/letter	decimal equiv.	overall length l ₁ (6.0 in)	overall length l ₁ (12.0 in)	
3/32	42	0.0935	C08100	—	1.250
		0.0938	C08101	C08188	1.250
	41	0.0960	C08102	—	1.375
	40	0.0980	C08144	C08167	1.375
	39	0.0995	C08103	—	1.375
	38	0.1015	C08104	—	1.438
7/64	37	0.1040	C08105	—	1.438
	36	0.1065	C08106	—	1.438
		0.1094	C08107	C08168	1.500
	35	0.1100	C08108	—	1.500
	34	0.1110	C08109	—	1.500
	32	0.1160	C08110	—	1.625
1/8	31	0.1200	C08111	—	1.625
		0.1250	C08115	C08169	1.625
	30	0.1285	C08142	C08170	1.625
	29	0.1360	C08112	C08171	1.750
	28	0.1405	C08113	—	1.750
		0.1406	C08114	C08172	1.750
9/64	27	0.1440	C08140	C08173	1.875
	26	0.1470	C08145	—	1.875
	25	0.1495	C08146	—	1.875
	24	0.1520	C08147	—	2.000
	23	0.1540	C08148	—	2.000
		0.1562	C08117	C08174	2.000
5/32					

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Straw	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆

☆ = Best Performance ☆ = Acceptable

drill diameter d ₁			order number		flute length l ₂ (in)
fraction	wire/letter	decimal equiv.	3722-6	3722-12	
			overall length l ₁ (6.0 in)	overall length l ₁ (12.0 in)	
	22	0.1570	C08149	—	2.000
	21	0.1590	C08138	C08175	2.125
	20	0.1610	C08137	C08176	2.125
	19	0.1660	C08150	C08177	2.125
	18	0.1695	C08151	—	2.125
11/64		0.1719	C08152	C08178	2.125
	17	0.1730	C08153	—	2.188
	16	0.1770	C08135	C08179	2.188
	15	0.1800	C08154	—	2.188
	14	0.1820	C08155	—	2.188
	13	0.1850	C08134	—	2.313
3/16		0.1875	C08119	C08180	2.313
	12	0.1890	C08156	—	2.313
	11	0.1910	C08133	C08181	2.313
	10	0.1935	C08132	C08182	2.438
	9	0.1960	C08157	—	2.438
	8	0.1990	C08130	—	2.438
	7	0.2010	C08158	—	2.438
13/64		0.2031	C08159	C08183	2.438
	6	0.2040	C08160	—	2.500
	5	0.2055	C08161	—	2.500
	4	0.2090	C08162	—	2.500
	3	0.2130	C08163	—	2.500
7/32		0.2188	C08121	C08184	2.500
	2	0.2210	C08164	C08185	2.625
	1	0.2280	C08165	—	2.625
15/64		0.2344	C08166	C08186	2.625
1/4		0.2500	C08123	C08187	2.750

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Straw	☆			☆		☆	☆	◆	◆	☆	◆	◆	

☆ = Best Performance ◆ = Acceptable

Style: 950E
Extra Length
 General Purpose

Note

Operating parameters begin on page 121.

 ASME
B94.11M


HSS

118° K-Notch

 Helix
Regular
21° to 34°

 Straight
Shank

 Surface
Treatment

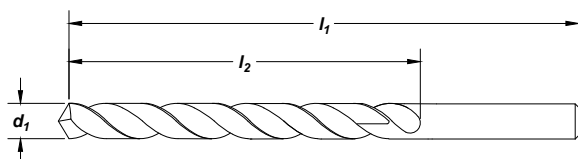 Black
Oxide

Feature:

Extra length for long reach and deeper drilling depth.

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 950E
3/32	.0938	8.000	5.500	C09655
7/64	.1094	8.000	5.500	C09656
1/8	.1250	8.000	5.500	C09657
1/8	.1250	10.000	7.500	C09707
1/8	.1250	12.000	9.000	C09736
9/64	.1406	8.000	5.500	C09658
5/32	.1562	8.000	5.500	C09659
5/32	.1562	10.000	7.500	C09709
5/32	.1562	12.000	9.000	C09738
11/64	.1719	8.000	5.500	C09660
3/16	.1875	8.000	5.500	C09661
3/16	.1875	10.000	7.500	C09711
3/16	.1875	12.000	9.000	C09740
13/64	.2031	8.000	5.500	C09662
7/32	.2188	8.000	5.500	C09663
7/32	.2188	10.000	7.500	C09713
7/32	.2188	12.000	9.000	C09742
15/64	.2344	8.000	5.500	C09664
15/64	.2344	10.000	7.500	C09714
1/4	.2500	8.000	5.500	C09665
1/4	.2500	10.000	7.500	C09715
1/4	.2500	12.000	9.000	C09744
17/64	.2656	8.000	5.500	C09666
9/32	.2812	8.000	5.500	C09667
9/32	.2812	10.000	7.500	C09717
9/32	.2812	12.000	9.000	C09746
19/64	.2969	8.000	5.500	C09668
5/16	.3125	8.000	5.500	C09669
5/16	.3125	10.000	7.500	C09719
5/16	.3125	12.000	9.000	C09748
21/64	.3281	8.000	5.500	C09670
11/32	.3438	8.000	5.500	C09671
11/32	.3438	10.000	7.500	C09721

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Black Oxide		☆		☆				☆	◆				
☆ = Best Performance ◆ = Acceptable													

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 950E
11/32	.3438	12.000	9.000	C09750
23/64	.3594	8.000	5.500	C09672
3/8	.3750	8.000	5.500	C09673
3/8	.3750	10.000	7.500	C09723
3/8	.3750	12.000	9.000	C09752
25/64	.3906	8.000	5.500	C09674
13/32	.4062	8.000	5.500	C09675
13/32	.4062	10.000	7.500	C09725
13/32	.4062	12.000	9.000	C09754
27/64	.4219	8.000	5.500	C09676
7/16	.4375	8.000	5.500	C09677
7/16	.4375	10.000	7.500	C09727
7/16	.4375	12.000	9.000	C09756
29/64	.4531	8.000	5.500	C09678
15/32	.4688	8.000	5.500	C09679
15/32	.4688	10.000	7.500	C09729
15/32	.4688	12.000	9.000	C09758
31/64	.4844	8.000	5.500	C09680
1/2	.5000	8.000	5.500	C09681
1/2	.5000	10.000	7.500	C09731
1/2	.5000	12.000	9.000	C09760
17/32	.5312	10.000	7.500	C09733
17/32	.5312	12.000	9.000	C09762
9/16	.5625	10.000	7.500	C09735
9/16	.5625	12.000	9.000	C09764
19/32	.5938	12.000	9.000	C09766
5/8	.6250	12.000	9.000	C09768
21/32	.6562	12.000	9.000	C09770
11/16	.6875	12.000	9.000	C09772
23/32	.7188	12.000	9.000	C09774
3/4	.7500	12.000	9.000	C09776

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Black Oxide	☆			☆				☆	◆				
☆ = Best Performance ◆ = Acceptable													

Styles: 2410, 2411, 2412

Taper Shank

Standard, Undersized, & Oversized

Note

Undersized and oversized shank drills available from stock in popular sizes.

Operating parameters begin on page 121.

Morse taper shank specifications on page 91.

ASME
B94.11M

HSS


118°

Helix
Regular
21° to 34°

Taper
Shank

Surface
Treatment

Black
Oxide

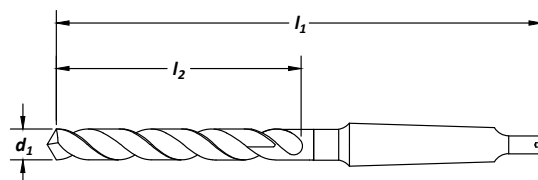

Feature:

General purpose use in steel and iron.

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	morse taper	order number		
					2410 standard	2411 undersized	2412 oversized
1/8	.1250	5.125	1.875	1	C12040	—	—
5/32	.1562	5.375	2.125	1	C12052	—	—
3/16	.1875	5.750	2.500	1	C12064	—	—
13/64	.2031	6.000	2.750	1	C12069	—	—
7/32	.2188	6.000	2.750	1	C12075	—	—
15/64	.2344	6.125	2.875	1	C12082	—	—
1/4-E	.2500	6.125	2.875	1	C12091	—	—
17/64	.2656	6.250	3.000	1	C12099	—	—
9/32	.2812	6.250	3.000	1	C12113	—	—
19/64	.2969	6.375	3.125	1	C12117	—	—
5/16	.3125	6.375	3.125	1	C12124	—	—
21/64	.3281	6.500	3.250	1	C12132	—	—
11/32	.3438	6.500	3.250	1	C12139	—	—
23/64	.3594	6.750	3.500	1	C12147	—	—
3/8	.3750	6.750	3.500	1	C12154	—	—
25/64	.3906	7.000	3.625	1	C12162	—	—
13/32	.4062	7.000	3.625	1	C12167	—	—
27/64	.4219	7.250	3.875	1	C12170	—	—
7/16	.4375	7.250	3.875	1	C12173	—	—
29/64	.4531	7.500	4.125	1	C12176	—	—
15/32	.4688	7.500	4.125	1	C12178	—	—
31/64	.4844	8.250	4.375	2	C12181	—	—
1/2	.5000	8.250	4.375	2	C12183	—	—
1/2	.5000	7.750	4.375	1	—	C12483	—
33/64	.5156	8.500	4.625	2	C12186	—	—
17/32	.5312	8.500	4.625	2	C12188	—	—
35/64	.5469	8.750	4.875	2	C12191	—	—
9/16	.5625	8.750	4.875	2	C12194	—	—
37/64	.5781	8.750	4.875	2	C12196	—	—
19/32	.5938	8.750	4.875	2	C12199	—	—
39/64	.6094	8.750	4.875	2	C12201	—	—
5/8	.6250	8.750	4.875	2	C12204	—	—

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	☆		☆					☆	◆				
Black Oxide	☆		☆					☆	◆				

☆ = Best Performance ◆ = Acceptable

Taper Shank

Standard, Undersized, & Oversized

Styles: **2410, 2411, 2412** (continued)



Taper Shank

High Speed Steel

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	morse taper	order number		
					2410 standard	2411 undersized	2412 oversized
41/64	.6406	9.000	5.125	2	C12207	—	—
21/32	.6562	9.000	5.125	2	C12209	—	—
43/64	.6719	9.250	5.375	2	C12212	—	—
11/16	.6875	9.250	5.375	2	C12214	—	—
11/16	.6875	10.000	5.375	3	—	—	C12670
45/64	.7031	9.500	5.625	2	C12216	—	—
23/32	.7188	9.500	5.625	2	C12218	—	—
47/64	.7344	9.750	5.875	2	C12220	—	—
3/4	.7500	9.750	5.875	2	C12222	—	—
3/4	.7500	10.500	5.875	3	—	—	C12678
49/64	.7656	9.875	6.000	2	C12223	—	—
25/32	.7812	9.875	6.000	2	C12225	—	—
51/64	.7969	10.750	6.125	3	C12227	—	—
13/16	.8125	10.750	6.125	3	C12229	—	—
53/64	.8281	10.750	6.125	3	C12231	—	—
27/32	.8438	10.750	6.125	3	C12232	—	—
55/64	.8594	10.750	6.125	3	C12234	—	—
7/8	.8750	10.750	6.125	3	C12236	—	—
7/8	.8750	10.000	6.125	2	—	C12505	—
57/64	.8906	10.750	6.125	3	C12238	—	—
29/32	.9062	10.750	6.125	3	C12240	—	—
59/64	.9219	10.750	6.125	3	C12241	—	—
15/16	.9375	10.750	6.125	3	C12243	—	—
31/32	.9688	11.000	6.375	3	C12247	—	—
63/64	.9844	11.000	6.375	3	C12249	—	—
1	1.0000	11.000	6.375	3	C12250	—	—
1	1.0000	12.000	6.375	4	—	—	C12684
1-1/64	1.0156	11.125	6.500	3	C12252	—	—
1-1/32	1.0312	11.125	6.500	3	C12254	—	—
1-1/16	1.0625	11.250	6.625	3	C12257	—	—
1-1/16	1.0625	12.250	6.625	4	—	—	C12691
1-1/8	1.1250	12.750	7.125	4	C12265	—	—
1-1/8	1.1250	11.750	7.125	3	—	C12518	—
1-3/16	1.1875	13.000	7.375	4	C12272	—	—
1-1/4	1.2500	13.500	7.875	4	C12279	—	—
1-1/4	1.2500	12.500	7.875	3	—	C12532	—
1-5/16	1.3125	14.250	8.625	4	C12286	—	—
1-11/32	1.3438	14.375	8.750	4	C12290	—	—
1-3/8	1.3750	14.500	8.875	4	C12293	—	—
1-7/16	1.4375	14.750	9.125	4	C12301	—	—
1-15/32	1.4688	14.875	9.250	4	C12304	—	—
1-1/2	1.5000	15.000	9.375	4	C12308	—	—
1-17/32	1.5312	15.000	9.375	4	—	C12541	—
1-9/16	1.5625	16.625	9.625	5	C12315	—	—
1-5/8	1.6250	17.000	10.000	5	C12322	—	—
1-3/4	1.7500	17.125	10.125	5	C12336	—	—
1-3/4	1.7500	16.250	10.375	4	—	C12566	—
1-7/8	1.8750	17.375	10.375	5	C12351	—	—
2	2.0000	17.375	10.375	5	C12365	—	—

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				>45
Black Oxide	☆			☆				☆	★				

☆ = Best Performance ★ = Acceptable

Style: 2440
**Cobalt
Heavy-Duty**
Note

Operating parameters begin on page 121.
Morse taper shank specifications on page 91.

ASME
B94.11M


M42
Cobalt

135° MOD

Helix
Regular
21° to 34°

Taper
Shank

Surface
Treatment

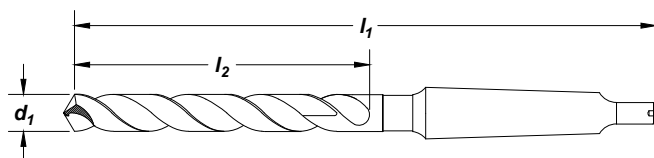
Straw
Oxide

Feature:

Highly heat resistant substrate for tough to machine materials.

Taper Shank

Cobalt

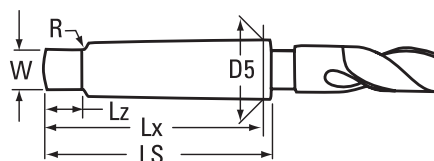drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	morse taper	order number 2440
1/4	.2500	6.125	2.875	1	C12705
5/16	.3125	6.375	3.125	1	C12728
3/8	.3750	7.375	3.500	2	C12751
7/16	.4375	7.750	3.875	2	C12765
1/2	.5000	8.250	4.375	2	C12775
9/16	.5625	8.750	4.875	2	C12786
5/8	.6250	8.750	4.875	2	C12796
11/16	.6875	10.000	5.375	3	C12806
3/4	.7500	10.500	5.875	3	C12814
7/8	.8750	10.750	6.125	3	C12828
15/16	.9375	10.750	6.125	3	C12835
1	1.0000	11.000	6.375	3	C12842


TECH TIPS
Morse Taper Shank Specifications


morse taper shank no.	taper per foot	taper per inch	D5 max shank dia.	LS length of shank	Lx length of shank to gauge line	Lz length of tang	W thickness of tang	R radius
1	.5985	.0498	.475	2.56	2.44	.37	.20	.19
2	.5994	.0499	.700	3.12	2.94	.44	.25	.25
3	.602391	.0501	.938	3.87	3.69	.56	.31	.28
4	.6232	.0519	1.231	4.87	4.62	.62	.47	.31
5	.6315	.0526	1.749	6.12	5.87	.75	.62	.37
6	.6256	.0521	2.494	8.56	8.25	1.12	.75	.50

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Straw	☆		☆		☆	☆	◆	☆	☆			

☆ = Best Performance ◆ = Acceptable

Taper Shank Extra Length

Style: **940E**



Note

Operating parameters begin on page 121.

Morse taper shank specifications on page 91.


ASME
B94.11M

HSS



Surface
Treatment

Black
Oxide

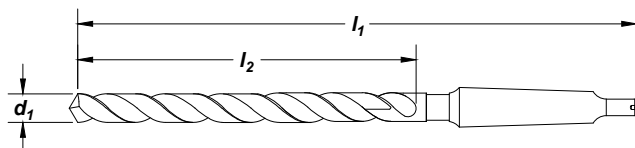

Feature:

Extra length for long reach and deeper drilling depth.

drill diameter d_1	decimal equiv.	overall length l_1 (in)	flute length l_2 (in)	morse taper	order number 940E
31/64	.4844	11.875	8.000	2	C13830
1/2	.5000	11.875	8.000	2	C13831
33/64	.5156	11.875	8.000	2	C13832
17/32	.5312	11.875	8.000	2	C13833
35/64	.5469	11.875	8.000	2	C13834
9/16	.5625	11.875	8.000	2	C13835
37/64	.5781	11.875	8.000	2	C13836
19/32	.5938	11.875	8.000	2	C13837
5/8	.6250	11.875	8.000	2	C13839
41/64	.6406	11.875	8.000	2	C13840
21/32	.6562	11.875	8.000	2	C13841
43/64	.6719	11.875	8.000	2	C13842
11/16	.6875	11.875	8.000	2	C13843
45/64	.7031	11.875	8.000	2	C13844
23/32	.7188	11.875	8.000	2	C13845
3/4	.7500	11.875	8.000	2	C13847
49/64	.7656	11.875	8.000	2	C13848
25/32	.7812	11.875	8.000	2	C13849

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Black Oxide	☆		☆					☆	★				

☆ = Best Performance ★ = Acceptable

Note


Operating parameters begin on page 121.

ASME
B94.11M

Carbide

Surface
Treatment

Bright

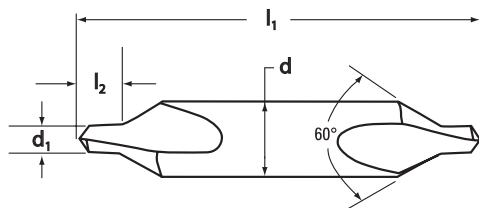

Countersink

Carbide

size number	drill diameter d₁		body diameter d in	overall length l₁ in	drill length l₂ in	order number 1798
	in	decimal				
#1	3/64	.0469	.125	1.500	.0469	C52772
#2	5/64	.0781	.188	2.000	.0781	C52773
#3	7/64	.1094	.250	2.000	.1094	C52774
#4	1/8	.1250	.313	2.125	.1250	C52775
#5	3/16	.1875	.438	2.750	.1875	C52776
#6	7/32	.2188	.500	3.000	.2188	C52777

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32	☆	☆	☆	>45
	Bright	☆	◆	☆	◆	◆	◆	☆	☆	☆			

☆ = Best Performance ◆ = Acceptable


Bell Type Drill & Countersink

Style: **996**



Note

Bell-type tool forms protected centers.

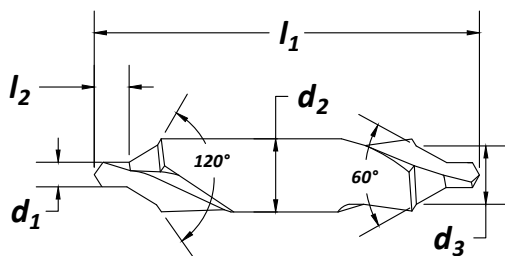

ASME
B94.11M

HSS



Surface
Treatment


Bright



size number	body diameter d_2 in	drill diameter d_1 in decimal	bell diameter d_3 in	overall length L_1 in	drill length L_2 in	order number
						996
#11	.125	3/64 .0469	.100	1.250	.047	C46272
#12	.188	1/16 .0625	.150	1.875	.063	C46273
#13	.250	3/32 .0938	.200	2.000	.094	C46274
#14	.313	7/64 .1094	.250	2.125	.109	C46275
#15	.438	5/32 .1562	.350	2.750	.156	C46276
#16	.500	3/16 .1875	.400	3.000	.188	C46277
#17	.625	7/32 .2188	.500	3.250	.219	C46278
#18	.750	1/4 .2500	.600	3.500	.250	C46279

Plain Drill & Countersink

Style: **998**

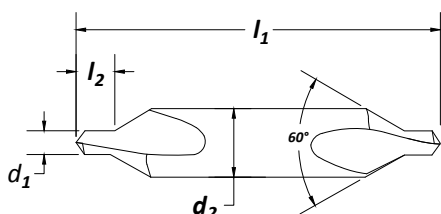

ASME
B94.11M

HSS



Surface
Treatment

Bright



size number	body diameter d_2 in	drill diameter d_1 in decimal	overall length L_1 in	drill length L_2 in	order number
					998
#00	.125	.025 .0250	1.250	.030	C46261
#0	.125	1/32 .0312	1.250	.038	C46262
#1	.125	3/64 .0469	1.250	.047	C46263
#2	.188	5/64 .0781	1.875	.078	C46264
#3	.250	7/64 .1094	2.000	.109	C46265
#4	.313	1/8 .1250	2.125	.125	C46266
#5	.438	3/16 .1875	2.750	.188	C46267
#6	.500	7/32 .2188	3.000	.219	C46268
#7	.625	1/4 .2500	3.250	.250	C46269
#8	.750	5/16 .3125	3.500	.313	C46270

Plain Drill & Countersink

SET

Style: **998**

no. of pieces	size range	order number
5	#1 through #5	998 C00944



Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright	☆			☆				☆	☆	☆			


☆ = Best Performance ◆ = Acceptable

Note

All dimensions in inches.

Many tools are available with additional surface treatments. Please call for a quote.

Countersink and deburring tools are simple, all-purpose tools made of Cobalt that provide flawless countersinking and deburring. The chatter-free cutting action requires minimal power. The micro-smooth CNC precision ground construction produces clean, smooth cutting without smearing on a variety of materials. The tool especially excels in countersinking or deburring holes in aluminum, plastics and other nonmetallic.

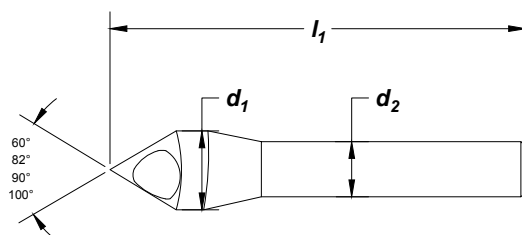**M42
Cobalt**
**Straight
Shank**
**Surface
Treatment**
Bright

Additional View

Countersink
Cobalt
60° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d₁	min	max	l₁ (in)	d₂ (in)	3001 bright
5/16	7/64	9/32	1-7/8	1/4	C94560
3/8	5/32	11/32	1-7/8	1/4	C94561
1/2	11/64	29/64	2	5/16	C94562
5/8	3/16	37/64	2-1/2	3/8	C94563
3/4	1/4	45/64	2-3/4	3/8	C94564
1	19/64	27/32	3	3/8	C94565
1-1/4	27/64	1-1/32	3-1/2	1/2	C94566

82° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d₁	min	max	l₁ (in)	d₂ (in)	3001 bright
5/16	3/32	9/32	1-5/8	1/4	C94567
3/8	9/64	11/32	1-3/4	1/4	C94568
1/2	5/32	29/64	1-3/4	5/16	C94569
5/8	11/64	37/64	2-1/8	3/8	C94570
3/4	13/64	45/64	2-3/8	3/8	C94571
1	19/64	59/64	2-5/8	3/8	C94572
1-1/4	23/64	1-1/32	3-1/8	1/2	C94573

90° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d₁	min	max	l₁ (in)	l₂ (in)	3001 bright
5/16	3/32	9/32	1-5/8	1/4	C94574
3/8	9/64	11/32	1-3/4	1/4	C94575
1/2	5/32	29/64	1-3/4	5/16	C94576
5/8	11/64	37/64	2-1/8	3/8	C94577
3/4	13/64	45/64	2-3/8	3/8	C94578
1	19/64	59/64	2-5/8	3/8	C94579
1-1/4	23/64	1-1/32	3-1/8	1/2	C94580

100° Countersink Angle

head diameter	diameter of cut		overall length	shank diameter	order number
d₁	min	max	l₁ (in)	l₂ (in)	3001 bright
5/16	3/32	9/32	1-5/8	1/4	C94581
3/8	9/64	11/32	1-3/4	1/4	C94582
1/2	5/32	29/64	1-3/4	5/16	C94583
5/8	11/64	37/64	2-1/8	3/8	C94584
3/4	13/64	45/64	2-3/8	3/8	C94585
1	19/64	59/64	2-5/8	3/8	C94586
1-1/4	23/64	1-1/32	3-1/8	1/2	C94587

SET
Style: 3001 4 Pieces

angle	sizes	order number
60°	5/16, 3/8, 1/2, 5/8 C94560, C94561, C94562, C94563	C94588
82°	5/16, 3/8, 1/2, 5/8 C94567, C94568, C94569, C94570	C94589
90°	5/16, 3/8, 1/2, 5/8 C94574, C94575, C94576, C94577	C94590
100°	5/16, 3/8, 1/2, 5/8 C94581, C94582, C94583, C94584	C94591

SET
Style: 3001 5 Pieces

angle	sizes	order number
60°	5/16, 3/8, 1/2, 3/4, 1 C94560, C94561, C94562, C94564, C94565	C94592
82°	5/16, 3/8, 1/2, 3/4, 1 C94567, C94568, C94569, C94571, C94572	C94593
90°	5/16, 3/8, 1/2, 3/4, 1 C94574, C94575, C94576, C94578, C94579	C94594
100°	5/16, 3/8, 1/2, 3/4, 1 C94581, C94582, C94583, C94585, C94586	C94595

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆		◆				☆			

☆ = Best Performance ◆ = Acceptable

Note


Operating parameters begin on page 121.

ASME
B94.11M

HSS



Surface
Treatment

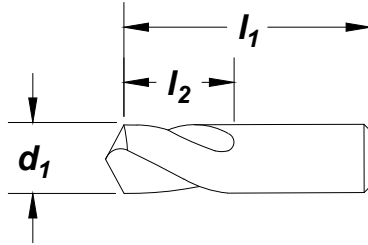

drill diameter d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	order number 995
3/8	.3750	2.000	1.000	C11739
1/2	.5000	2.000	1.000	C11757
5/8	.6250	2.250	1.125	C11771
3/4	.7500	2.250	1.125	C11782
1	1.0000	2.500	1.250	C11796

TECH TIP

Using Spotting and Centering Drills

- Use these drills to get true and accurate centers.
- There is no body clearance on these drills to allow chucking close to the point. This feature helps to maintain drill accuracy for centering.

TECH TIP

Point Angle: 90° versus 120°

- Use the 90° point spotting drill for a 118° point following drill.
- Use the 120° point spotting drill for a 135° following drill.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆				☆	☆	◆			

☆ = Best Performance

◆ = Acceptable



NC Spotting & Centering Short

Style: **2636**

Note

Operating parameters begin on page 121.


ASME
B94.11M

M42
Cobalt



Surface
Treatment

Straw
Oxide

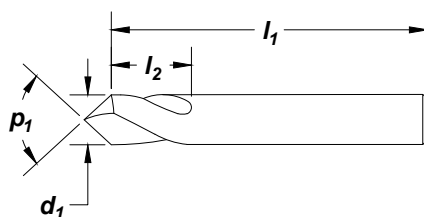

drill diameter d_1	decimal equiv.	overall length I_1 (in)	flute length I_2 (in)	order number p_1 - point angle	
				90°	120°
1/4	.2500	2.500	1.000	C26167	C26174
3/8	.3750	3.125	1.125	C26168	C26175
1/2	.5000	3.750	1.500	C26169	C26176
5/8	.6250	4.250	1.625	C26170	C26177
3/4	.7500	5.000	1.750	C26171	C26178
1	1.0000	6.000	1.750	C26172	C26179

Spotting / Centering

Cobalt

NC Spotting & Centering Long

Style: **2646**


ASME
B94.11M

M42
Cobalt



Surface
Treatment

Straw
Oxide

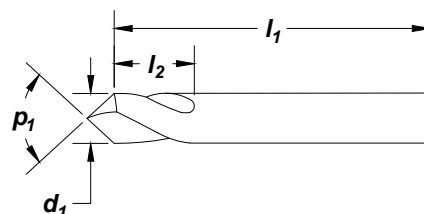

drill diameter d_1	decimal equiv.	overall length I_1 (in)	flute length I_2 (in)	order number p_1 - point angle	
				90°	120°
1/4	.2500	4.000	1.000	C26181	C26188
3/8	.3750	5.000	1.125	C26182	C26189
1/2	.5000	6.000	1.500	C26183	C26190
5/8	.6250	7.125	1.625	C26184	C26191
3/4	.7500	8.000	1.750	C26185	C26192
1	1.0000	8.000	1.750	C26186	C26193

NC Spotting & Centering Short and Long

SET

Style: **2636, 2646**

no. of pieces	point angle	size range	order number	
			2636	2646
6	90°	1/4" through 1"	C26173	C26187
6	120°	1/4" through 1"	C26180	C26194



6-Piece Set
#C26173

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Hardness													
Straw	☆		☆		☆			☆	☆	☆	◆		

☆ = Best Performance


◆ = Acceptable

NC Spotting & Centering Short

Style: **2635**




Note
Operating parameters begin on page 121.

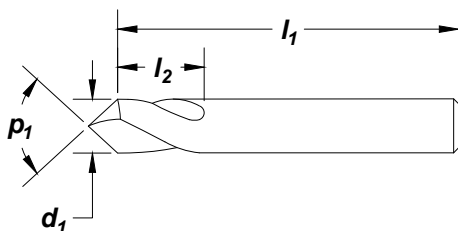

				order number	
				p ₁ - point angle	
drill diameter	decimal	overall length	flute length	90°	120°
d ₁	equiv.	l ₁ (in)	l ₂ (in)		
1/4	.2500	2.500	1.000	C24167	C24174
3/8	.3750	3.125	1.125	C24168	C24175
1/2	.5000	3.750	1.500	C24169	C24176
5/8	.6250	4.250	1.625	C24170	C24177
3/4	.7500	5.000	1.750	C24171	C24178
1	1.0000	6.000	1.750	C24172	C24179

NC Spotting & Centering Long

Style: **2645**

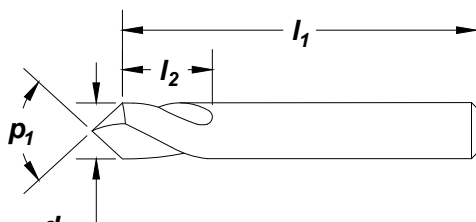

				order number	
				p ₁ - point angle	
drill diameter	decimal	overall length	flute length	90°	120°
d ₁	equiv.	l ₁ (in)	l ₂ (in)		
1/4	.2500	4.000	1.000	C24181	C24188
3/8	.3750	5.000	1.125	C24182	C24189
1/2	.5000	6.000	1.500	C24183	C24190
5/8	.6250	7.125	1.625	C24184	C24191
3/4	.7500	8.000	1.750	C24185	C24192
1	1.0000	8.000	1.750	C24186	C24193

NC Spotting & Centering Short and Long

SET

Style: **2635, 2645**

no. of pieces	point angle	size range	order number	
			2635	2645
6	90°	1/4" through 1"	C24173	C24187
6	120°	1/4" through 1"	C24180	C24194



6-Piece Set #C24187

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness				300 Series	400 series		18-22	22-32				>45
Bright	☆		☆		◆			☆	☆	☆			

☆ = Best Performance ◆ = Acceptable




Style: 10001

Single Flute Countersink

Note

Operating parameters begin on page 121.

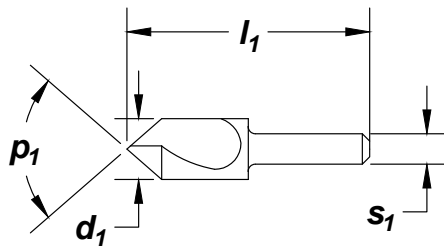

ASME
B94.11M

HSS



Surface
Treatment



tool diameter

d_1 (in)

shank diameter

overall length

p_1 order number - 10001

fraction	decimal	s_1 (in)	l_1 (in)	60° angle	82° angle	90° angle	100° angle	120° angle
1/4	.2500	.188	1.500	C46101	C46102	C46103	C46104	C46106
3/8	.3750	.250	1.750	C46107	C46108	C46109	C46110	C46112
1/2	.5000	.250	2.000	C46113	C46114	C46115	C46116	C46118
5/8	.6250	.375	2.250	C46119	C46120	C46121	C46122	C46123
3/4	.7500	.500	2.625	C46124	C46125	C46126	C46127	C46129
1	1.0000	.500	2.750	C46130	C46131	C46132	C46133	C46135
1-1/4	1.2500	.500	2.750	C46136	C46137	C46138	—	—
1-1/2	1.5000	.750	2.875	C46141	C46139	C46140	—	—
2	2.0000	.750	3.250	C46142	—	C46143	—	—


Style: 10003

3 Flute Countersink

ASME
B94.11M

HSS

Surface
Treatment

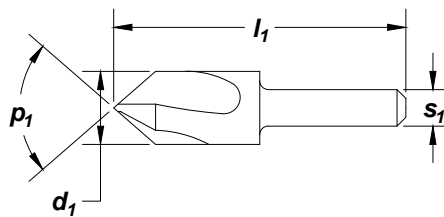

tool diameter

d_1

shank diameter

overall length

p_1 order number - 10003

fraction	decimal	s_1 (in)	l_1 (in)	60° angle	82° angle	90° angle	100° angle	120° angle
1/4	.2500	.188	1.500	C46150	C46151	C46152	C46153	C46155
3/8	.3750	.250	1.750	C46156	C46157	C46158	C46159	C46161
1/2	.5000	.250	2.000	C46162	C46163	C46164	C46165	C46167
5/8	.6250	.375	2.250	C46168	C46169	C46170	C46171	C46173
3/4	.7500	.500	2.625	C46174	C46175	C46176	C46177	C46179
1	1.0000	.500	2.750	C46180	C46181	C46182	C46183	C46185
1-1/4	1.2500	.500	2.750	C46186	C46187	C46188	—	—
1-1/2	1.5000	.750	2.875	C46189	C46190	C46191	—	—
2	2.0000	.750	3.250	—	—	C46192	—	—

SET

Style: 10001, 10003

Countersink Sets Single flute and 3 flute

no. of pieces	angle	size range	order number	
			10001	10003
5	60°	1/4" through 3/4" x 1/8"	C00970	C00972
5	82°	1/4" through 3/4" x 1/8"	C00971	C00973

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Black Oxide	☆		◆					☆	☆				

☆ = Best Performance

◆ = Acceptable



CUSTOMER SERVICE: telephone 800.348.2885 • fax 800.892.4290

4 Flute Center Reamer / Countersink

Style: **610**




ASME
B94.11M

HSS

Surface
Treatment

Black
Oxide

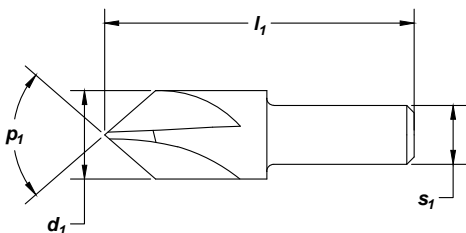

tool diameter

d_1 (in)

shank diameter

overall length

p_1 order number - **610**

fraction	decimal	s_1 (in)	l_1 (in)	60° angle	82° angle	90° angle	100° angle
1/4	.2500	.188	1.500	C46198	C46199	C46200	C46201
3/8	.3750	.250	1.750	C46204	C46205	C46206	C46207
1/2	.5000	.375	2.000	C46210	C46211	C46212	C46213
5/8	.6250	.375	2.250	C46216	C46217	C46218	C46219
3/4	.7500	.500	2.625	C46222	C46223	C46224	C46225

4 Flute Center Reamer/ Countersink

SET

Style: **610**

no. of pieces	angle	size range	order number
5	82°	1/4" through 3/4" x 1/8"	C00969

Drift Drill

Style: **105**

ASME
B94.11M

HSS

Surface
Treatment

Bright

fits morse taper socket or sleeve	order number
#1	C53665
#2	C53666
#3	C53667
#4	C53668



TECH TIPS

Using Drill Drifts

- Used to remove taper shank drills and tapered sockets from the spindle or from holders.

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						>45
Bright		★		☆				☆	☆				

☆ = Best Performance


★ = Acceptable

Note

Operating parameters begin on page 121.

ANSI
SIZES

Carbide

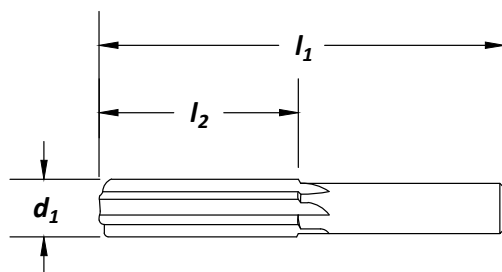
Surface
Treatment

Feature:

High red hardness for extended wear life in high heat conditions.

reamer dia. d₁	decimal equiv.	shank dia.	overall length l₁ (in)	flute length l₂ (in)	number of flutes	order number 1730
1/16	.0625	.058	1.500	.375	4	C50103
3/32	.0938	.088	2.000	.500	4	C50121
1/8	.1250	.120	2.250	.625	4	C50133
5/32	.1562	.151	2.500	.750	4	C50145
3/16	.1875	.182	2.750	.875	4	C50157
7/32	.2188	.213	3.000	1.000	4	C50168
1/4	.2500	.244	3.000	1.000	4	C50180
9/32	.2812	.270	3.250	1.125	6	C50194
5/16	.3125	.301	3.250	1.125	6	C50203
11/32	.3438	.332	3.500	1.250	6	C50214
3/8	.3750	.363	3.500	1.250	6	C50226



How to Select the Correct Reamer Style

- Straight flute reamers, styles 4001, 4005, 1730, and 4703, are for use in through hole applications.
- Spiral flute reamers, style 4030, are for use in blind holes. They produce a smoother finish than straight flute reamers.
- Use reamer style 616, bridge reamer and style 618, car reamer, for aligning misaligned holes.
- Style 642 taper pipe reamers are used to ream a tapered hole before tapping only in soft, stringy materials.
- High spiral Taper Pin Reamers, style 650 are used to produce taper pin holes; the high spiral prevents chip packing.
- Taper pin reamers styles 657 and 659 are used to produce taper pin holes primarily by hand reaming; drill the starting hole a few thousandths of an inch smaller than the desired small diameter of the finished hole.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆	◆	☆	◆	☆	☆	☆	☆	☆			

☆ = Best Performance ◆ = Acceptable

Straight Shank and Flute Chucking

Styles: **4001**



Note
Custom reamer dimensions
shown in Technical Section.

Operating parameters begin
on page 121.


ASME
B94.2

DIN
338

HSS



Surface
Treatment

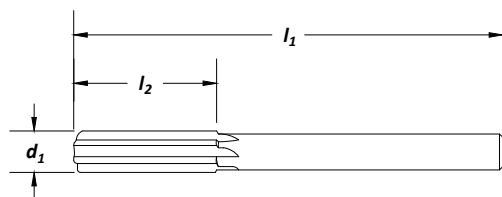

reamer dia.		overall length		flute length		number of flutes	order number
in	d1 wire	metric	decimal equiv.	l1 in	l2 mm		
	60		.0400	2.500	.500	4	C25003
	59		.0410	2.500	.500	4	C25005
	58		.0420	2.500	.500	4	C25008
	57		.0430	2.500	.500	4	C25010
	56		.0465	2.500	.500	4	C25019
3/64			.0469	2.500	.500	4	C25020
	55		.0520	2.500	.500	4	C25034
	54		.0550	2.500	.500	4	C25041
		1.5	.0591	63.50	12.70	4	C25059
	53		.0595	2.500	.500	4	C25053
1/16			.0625	2.500	.500	4	C25060
	52		.0635	2.500	.500	4	C25063
	51		.0670	3.000	.750	4	C25072
	50		.0700	3.000	.750	4	C25079
	49		.0730	3.000	.750	4	C25087
	48		.0760	3.000	.750	4	C25094
5/64			.0781	3.000	.750	4	C25100
	47		.0785	3.000	.750	4	C25101
		2.0	.0787	76.20	19.05	4	C25095
	46		.0810	3.000	.750	4	C25108
	45		.0820	3.000	.750	4	C25110
	44		.0860	3.000	.750	4	C25120
	43		.0890	3.000	.750	4	C25128
	42		.0935	3.000	.750	4	C25139
3/32			.0938	3.000	.750	4	C25140
	41		.0960	3.500	.875	4	C25146
	40		.0980	3.500	.875	4	C25151
	39		.0995	3.500	.875	4	C25155
	38		.1015	3.500	.875	4	C25159
	37		.1040	3.500	.875	4	C25165
	36		.1065	3.500	.875	4	C25171
7/64			.1094	3.500	.875	4	C25178
	35		.1100	3.500	.875	4	C25180
	34		.1110	3.500	.875	4	C25183
	33		.1130	3.500	.875	4	C25187
	32		.1160	3.500	.875	4	C25194
		3.0	.1181	88.90	22.23	4	C25185
	31		.1200	3.500	.875	6	C25203
1230*			.1230	3.500	.875	6	*C25210
.1240			.1240	3.500	.875	6	C25212
.1247*			.1247	3.500	.875	6	*C25215
1/8			.1250	3.500	.875	6	C25216
.1260			.1260	3.500	.875	6	C25220
	30		.1285	3.500	.875	6	C25226
	29		.1360	4.000	1.000	6	C25243

*dowel pin reamer tolerance +.0000/- .0002

continued on next page

reamer dia.			overall length		flute length		number of flutes	order number
in	d1 wire	metric	decimal equiv.	l1 in mm	l2 in mm			
9/64	28		.1405	4.000	1.000	6	C25253	
			.1406	4.000	1.000	6	C25254	
	27		.1440	4.000	1.000	6	C25262	
	26		.1470	4.000	1.000	6	C25269	
	25		.1495	4.000	1.000	6	C25275	
5/32	24		.1520	4.000	1.000	6	C25281	
	23		.1540	4.000	1.000	6	C25285	
			.1562	4.000	1.000	6	C25290	
	22		.1570	4.000	1.000	6	C25292	
		4.0	.1575		101.60	25.40	6	C25291
11/64	21		.1590	4.500	1.125	6	C25297	
	20		.1610	4.500	1.125	6	C25301	
	19		.1660	4.500	1.125	6	C25313	
	18		.1695	4.500	1.125	6	C25322	
			.1719	4.500	1.125	6	C25327	
	17		.1730	4.500	1.125	6	C25330	
	16		.1770	4.500	1.125	6	C25339	
	15		.1800	4.500	1.125	6	C25346	
	14		.1820	4.500	1.125	6	C25351	
	13		.1850	4.500	1.125	6	C25357	
1855*		.1855	4.500	1.125	6	*C25360		
.1865		.1865	4.500	1.125	6	C25362		
.1870*		.1870	4.500	1.125	6	*C25365		
3/16		.1875	4.500	1.125	6	C25366		
.1885		.1885	4.500	1.125	6	C25368		
13/64	12		.1890	4.500	1.125	6	C25369	
	11		.1910	5.000	1.250	6	C25374	
	10		.1935	5.000	1.250	6	C25380	
	9		.1960	5.000	1.250	6	C25385	
		5.0	.1969		127.00	31.75	6	C25314
7/32	8		.1990	5.000	1.250	6	C25392	
	7		.2010	5.000	1.250	6	C25397	
			.2031	5.000	1.250	6	C25402	
	6		.2040	5.000	1.250	6	C25404	
	5		.2055	5.000	1.250	6	C25408	
15/64	4		.2090	5.000	1.250	6	C25417	
	3		.2130	5.000	1.250	6	C25426	
			.2188	5.000	1.250	6	C25438	
	2		.2210	6.000	1.500	6	C25443	
	1		.2280	6.000	1.500	6	C25459	
2480*	A		.2340	6.000	1.500	6	C25473	
			.2344	6.000	1.500	6	C25474	
		6.0	.2362		152.40	38.10	6	C25475
	B		.2380	6.000	1.500	6	C25483	
	C		.2420	6.000	1.500	6	C25492	
.2490	D		.2460	6.000	1.500	6	C25501	
			.2480	6.000	1.500	6	*C25508	
			.2490	6.000	1.500	6	C25510	
.2495*		.2495	6.000	1.500	6	*C25512		

*dowel pin reamer tolerance $+.0000/-0.0002$

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	Bright	☆		☆		☆		☆	◆	☆			
☆ = Best Performance ◆ = Acceptable													

reamer dia.			overall length		flute length		number of flutes	order number
in	d ₁ wire	metric	decimal equiv.	l ₁ in mm	l ₂ in mm	4001		
1/4	E		.2500	6.000	1.500	6	C25513	
.2510			.2510	6.000	1.500	6	C25516	
	F		.2570	6.000	1.500	6	C25530	
	G		.2610	6.000	1.500	6	C25539	
17/64			.2656	6.000	1.500	6	C25550	
	H		.2660	6.000	1.500	6	C25552	
	I		.2720	6.000	1.500	6	C25566	
		7.0	.2756	152.40	38.10	6	C25567	
	J		.2770	6.000	1.500	6	C25577	
	K		.2810	6.000	1.500	6	C25585	
9/32			.2812	6.000	1.500	6	C25608	
	L		.2900	6.000	1.500	6	C25605	
	M		.2950	6.000	1.500	6	C25617	
19/64			.2969	6.000	1.500	6	C25622	
	N		.3020	6.000	1.500	6	C25634	
.3105*			.3105	6.000	1.500	6	*C25655	
.3115			.3115	6.000	1.500	6	C25658	
.3120*			.3120	6.000	1.500	6	*C25660	
5/16			.3125	6.000	1.500	6	C25661	
.3135			.3135	6.000	1.500	6	C25663	
		8.0	.3150	152.40	38.10	6	C25668	
	O		.3160	6.000	1.500	6	C25669	
	P		.3230	6.000	1.500	6	C25685	
21/64			.3281	6.000	1.500	6	C25698	
	Q		.3320	6.000	1.500	6	C25707	
	R		.3390	6.000	1.500	6	C25723	
11/32			.3438	6.000	1.500	6	C25733	
	S		.3480	7.000	1.750	6	C25742	
		9.0	.3543	177.80	44.45	6	C25743	
	T		.3580	7.000	1.750	6	C25764	
23/64			.3594	7.000	1.750	6	C25768	
	U		.3680	7.000	1.750	6	C25789	
.3730*			.3730	7.000	1.750	6	*C25801	
.3740			.3740	7.000	1.750	6	C25804	
.3745*			.3745	7.000	1.750	6	*C25806	
3/8			.3750	7.000	1.750	6	C25807	
.3760			.3760	7.000	1.750	6	C25809	
	V		.3770	7.000	1.750	6	C25811	
	W		.3860	7.000	1.750	6	C25833	
25/64			.3906	7.000	1.750	6	C25844	
		10.0	.3937	177.80	44.45	6	C25845	
	X		.3970	7.000	1.750	6	C25858	
	Y		.4040	7.000	1.750	6	C25873	
13/32			.4062	7.000	1.750	6	C25878	
	Z		.4130	7.000	1.750	6	C25892	
27/64			.4219	7.000	1.750	6	C25911	
		11.0	.4331	177.80	44.45	6	C25912	
.4355*			.4355	7.000	1.750	6	*C25942	
.4365			.4365	7.000	1.750	6	C25944	
.4370*			.4370	7.000	1.750	6	*C25946	
7/16			.4375	7.000	1.750	6	C25947	
.4385			.4385	7.000	1.750	6	C25949	
29/64			.4531	7.000	1.750	6	C25981	
15/32			.4688	7.000	1.750	6	C26014	
		12.0	.4724	203.20	50.80	6	C26015	
31/64			.4844	8.000	2.000	6	C26048	

*dowel pin reamer tolerance +.0000/-.0002

continued on next page

Styles: 4001 (continued)
Straight Shank and Flute
Chucking
Reamers
High Speed Steel

reamer dia.			overall length		flute length		number of flutes	order number	
d ₁		decimal equiv.	l ₁		l ₂				
in	wire		in	mm	in	mm			
.4990*			.4990	8.000		2.000	6	*C26080	
1/2			.5000	8.000		2.000	6	C26083	
.5010*			.5010	8.000		2.000	8	*C26085	
		13.0	.5118		203.20		50.80	8	C26086
17/32			.5312	8.000		2.000		8	C26150
		14.0	.5512		203.20		50.80	8	C26151
9/16			.5625	8.000		2.000		8	C26217
		15.0	.5906		203.20		50.80	8	C26218
19/32			.5938	8.000		2.000		8	C26284
5/8			.6250	9.000		2.250		8	C26351
		16.0	.6299		228.60		57.15	8	C26352
21/32			.6562	9.000		2.250		8	C26418
11/16			.6875	9.000		2.250		8	C26485
23/32			.7188	9.000		2.250		8	C26550
3/4			.7500	9.500		2.500		8	C26615
25/32			.7812	9.500		2.500		8	C26680
13/16			.8125	9.500		2.500		8	C26746
27/32			.8438	9.500		2.500		8	C26811
7/8			.8750	10.000		2.625		8	C26876
29/32			.9062	10.000		2.625		8	C26941
15/16			.9375	10.000		2.625		8	C27006
31/32			.9688	10.000		2.625		8	C27072
1			1.0000	10.500		2.750		8	C27137
1-1/16			1.0625	10.500		2.750		10	C27144
1-1/8			1.1250	11.000		2.875		10	C27152
1-3/16			1.1875	11.000		2.875		10	C27159
1-1/4			1.2500	11.500		3.000		10	C27166
1-3/8			1.3750	12.000		3.250		10	C27180
1-1/2			1.5000	12.500		3.500		12	C27195

*dowel pin reamer tolerance +.0000/-.0002

SET
Style: 4001
Straight Shank and Flute
Chucking

no. of pieces	surface treatment	size range	order number
29	bright	1/16" through 1/2" x 1/64"	C00964



Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆		☆		☆	◆	☆			

☆ = Best Performance ◆ = Acceptable

Straight Shank, Spiral Flute Chucking



Styles: **4030**

Note

Custom reamer dimensions shown in Technical Section.


Operating parameters begin on page 121.

ASME
B94.2

HSS



Surface
Treatment

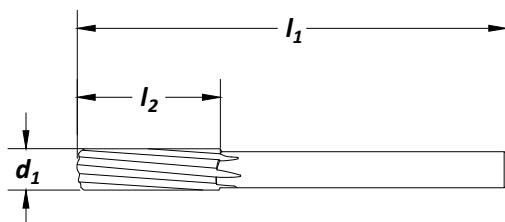

reamer dia. d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	number of flutes	order number 4030
1/16	.0625	2.500	.500	4	C29273
5/64	.0781	3.000	.750	4	C29311
3/32	.0938	3.000	.750	4	C29350
7/64	.1094	3.500	.875	4	C29386
1/8	.1250	3.500	.875	6	C29421
9/64	.1406	4.000	1.000	6	C29457
5/32	.1562	4.000	1.000	6	C29493
3/16	.1875	4.500	1.125	6	C29565
13/64	.2031	5.000	1.250	6	C29601
7/32	.2188	5.000	1.250	6	C29637
1/4	.2500	6.000	1.500	6	C29709
17/64	.2656	6.000	1.500	6	C29745
9/32	.2812	6.000	1.500	6	C29803
5/16	.3125	6.000	1.500	6	C29853
21/64	.3281	6.000	1.500	6	C29890
11/32	.3438	6.000	1.500	6	C29925
23/64	.3594	7.000	1.750	6	C29960
3/8	.3750	7.000	1.750	6	C29997
25/64	.3906	7.000	1.750	6	C30033
13/32	.4062	7.000	1.750	6	C30067
7/16	.4375	7.000	1.750	6	C30134
29/64	.4531	7.000	1.750	6	C30168
15/32	.4688	7.000	1.750	6	C30201
31/64	.4844	8.000	2.000	6	C30235
1/2	.5000	8.000	2.000	6	C30268
17/32	.5312	8.000	2.000	8	C30335
9/16	.5625	8.000	2.000	8	C30402
19/32	.5938	8.000	2.000	8	C30469
5/8	.6250	9.000	2.250	8	C30536
21/32	.6562	9.000	2.250	8	C30603
11/16	.6875	9.000	2.250	8	C30670
23/32	.7188	9.000	2.250	8	C30735
3/4	.7500	9.500	2.500	8	C30800
25/32	.7812	9.500	2.500	8	C30865
13/16	.8125	9.500	2.500	8	C30931
7/8	.8750	10.000	2.625	8	C31061
15/16	.9375	10.000	2.625	8	C31191
1	1.0000	10.500	2.750	8	C31322
1-1/8	1.1250	11.000	2.875	10	C31337
1-1/4	1.2500	11.500	3.000	10	C31351
1-3/8	1.3750	12.000	3.250	10	C31365
1-1/2	1.5000	12.500	3.500	12	C31380

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆		☆		☆	◆	☆			
☆ = Best Performance ◆ = Acceptable													

Styles: 4005

Taper Shank, Straight Flute
Chucking

Note

Custom reamer dimensions shown in Technical Section.


Operating parameters begin on page 121.

ANSI
SIZES

HSS



Surface
Treatment

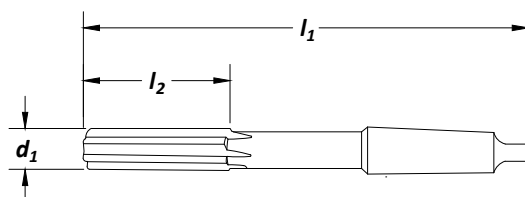

Reamers

High Speed Steel

reamer dia. d₁	decimal equiv.	overall length l₁ (in)	flute length l₂ (in)	morse taper	number of flutes	order number 4005
1/4	.2500	6.000	1.500	1	6	C33842
5/16	.3125	6.000	1.500	1	6	C33986
3/8	.3750	7.000	1.750	1	6	C34129
7/16	.4375	7.000	1.750	1	6	C34266
1/2	.5000	8.000	2.000	1	6	C34400
17/32	.5312	8.000	2.000	1	6	C34467
9/16	.5625	8.000	2.000	1	8	C34534
19/32	.5938	8.000	2.000	1	8	C34601
5/8	.6250	9.000	2.250	2	8	C34668
21/32	.6562	9.000	2.250	2	8	C34735
11/16	.6875	9.000	2.250	2	8	C34802
23/32	.7188	9.000	2.250	2	8	C34867
3/4	.7500	9.500	2.500	2	8	C34932
25/32	.7812	9.500	2.500	2	8	C34997
13/16	.8125	9.500	2.500	2	8	C35063
27/32	.8438	9.500	2.500	2	8	C35128
7/8	.8750	10.000	2.625	2	8	C35193
29/32	.9062	10.000	2.625	2	8	C35258
15/16	.9375	10.000	2.625	3	8	C35323
31/32	.9688	10.000	2.625	3	8	C35389
1"	1.0000	10.500	2.750	3	8	C35454
1-1/16	1.0625	10.500	2.750	3	10	C35461
1-1/8	1.1250	11.000	2.875	3	10	C35469
1-3/16	1.1875	11.000	2.875	3	10	C35476
1-1/4	1.2500	11.500	3.000	4	10	C35483
1-5/16	1.3125	11.500	3.000	4	10	C35490
1-3/8	1.3750	12.000	3.250	4	10	C35497
1-7/16	1.4375	12.000	3.250	4	10	C35505
1-1/2	1.5000	12.500	3.500	4	12	C35512

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆		☆		☆	◆	☆			
☆ = Best Performance ◆ = Acceptable													

Straight Shank and Flute Chucking - Carbide-Tipped



Styles: **4703**

Note

Run at carbide speeds.

HSS shank and body for extra strength.


Operating parameters begin on page 121.

ANSI
SIZES

HSS



Surface
Treatment

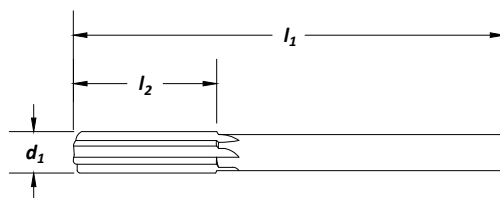

reamer dia. d₁	decimal equiv.	shank dia.	overall length l₁ (in)	flute length l₂ (in)	number of flutes	order number 4703
1/4	.2500	.2405	6.000	1.500	4	C50368
9/32	.2812	.2485	6.000	1.500	4	C50382
5/16	.3125	.2792	6.000	1.500	4	C50391
11/32	.3438	.2792	6.000	1.500	4	C50402
3/8	.3750	.3105	7.000	1.750	4	C50414
13/32	.4062	.3105	7.000	1.750	4	C50423
7/16	.4375	.3730	7.000	1.750	6	C50428
15/32	.4688	.3730	7.000	1.750	6	C50433
1/2	.5000	.4355	8.000	2.000	6	C50438
17/32	.5312	.4355	8.000	2.000	6	C50443
9/16	.5625	.4355	8.000	2.000	6	C50449
5/8	.6250	.5620	9.000	2.250	6	C50459

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32			>45
	Bright	☆	◆	☆	◆	☆	◆	◆	☆	◆	☆		
	☆ = Best Performance ◆ = Acceptable												

Style: 616

Taper Shank Bridge Reamer

Note

Operating parameters
begin on page 121.

ANSI
SIZES


HSS

LHS /
RHC

Taper
Shank

Surface
Treatment

Black
Oxide

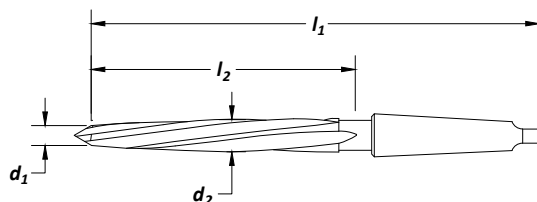

reamer dia. d₂	decimal equiv.	small end dia. d₁ (in)	overall length l₁ (in)	flute length l₂ (in)	morse taper	number of flutes	order number
							616
7/16	.4375	.266	8.250	4.375	2	4	C23812
1/2	.5000	.313	9.000	5.125	2	4	C23813
9/16	.5625	.375	9.000	5.125	2	4	C23814
5/8	.6250	.391	10.000	6.125	2	4	C23815
11/16	.6875	.406	11.750	7.125	3	4	C23816
3/4	.7500	.469	12.000	7.375	3	4	C23817
13/16	.8125	.547	12.000	7.375	3	4	C23818
7/8	.8750	.609	12.000	7.375	3	4	C23819
15/16	.9375	.672	12.000	7.375	3	4	C23820
1	1.0000	.734	12.000	7.375	3	4	C23821
1-1/16	1.0625	.813	12.000	7.375	3	4	C23822
1-1/8	1.1250	.859	12.000	7.375	3	4	C23823
1-3/16	1.1875	.922	12.000	7.375	3	4	C23824

Style: 618

Taper Shank Car Reamer

Note

Operating parameters
begin on page 121.

ANSI
SIZES


HSS

LHS /
RHC

Taper
Shank

Surface
Treatment

Black
Oxide

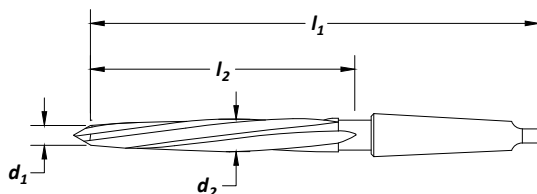

reamer dia. d₂	decimal equiv.	small end dia. d₁ (in)	overall length l₁ (in)	flute length l₂ (in)	morse taper	number of flutes	order number
							618
9/16	.5625	0.313	7.563	3.938	2	5	C23957
5/8	.6250	0.328	8.063	4.438	2	5	C23958
11/16	.6875	0.359	8.813	4.438	3	5	C23959
3/4	.7500	0.422	9.500	5.000	3	5	C23960
13/16	.8125	0.469	9.500	5.000	3	5	C23961
15/16	.9375	0.563	9.500	5.000	3	5	C23962

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
Bright	☆			☆					☆	☆			

☆ = Best Performance ◆ = Acceptable

Taper Pipe

Style: 642

Note
Operating parameters
begin on page 121.

ANSI
SIZES


HSS

LHS /
RHC

Square
Shank

Surface
Treatment

Bright

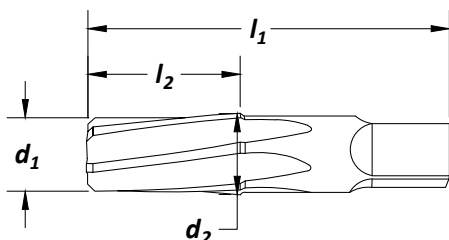

nominal pipe diameter	small end dia. d_1 (in)	large end dia. d_2 (in)	overall length l_1 (in)	flute length l_2 (in)	no. of flutes	order number 642
1/8	.316	.362	2.125	.750	6	C24982
1/4	.406	.472	2.438	1.063	6	C24983
3/8	.540	.606	2.563	1.063	6	C24984
1/2	.665	.751	3.125	1.375	6	C24985
3/4	.876	.962	3.750	1.375	8	C24986
1	1.103	1.212	3.750	1.750	8	C24987
1-1/4	1.444	1.553	4.000	1.750	10	C24988
1-1/2	1.684	1.793	4.250	1.750	10	C24989

High Spiral Spirex

Taper Pin

Style: 650

Note
Operating parameters
begin on page 121.

ANSI
SIZES


HSS

1/4" / 12"

LH
Spiral
Flute

Surface
Treatment

Bright

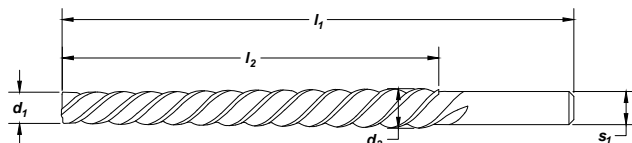

pin size	small end dia. d_1 (in)	large end dia. d_2 (in)	overall length l_1 (in)	flute length l_2 (in)	shank dia. s_1 (in)	order number 650
#7/0	.0497	.0666	1.813	.813	.0781	C24229
#6/0	.0611	.0806	1.938	.938	.0938	C24230
#5/0	.0719	.0966	2.188	1.188	.1094	C24231
#4/0	.0869	.1142	2.313	1.313	.1250	C24232
#3/0	.1029	.1302	2.313	1.313	.1406	C24233
#2/0	.1137	.1462	2.563	1.563	.1562	C24234
#0	.1287	.1638	2.938	1.688	.1719	C24235
#1	.1447	.1798	2.938	1.688	.1875	C24236
#2	.1605	.2008	3.188	1.938	.2031	C24237
#3	.1813	.2294	3.688	2.313	.2344	C24238
#4	.2071	.2604	4.063	2.563	.2656	C24239
#5	.2409	.2994	4.313	2.813	.3125	C24240
#6	.2773	.3540	5.438	3.688	.3594	C24241
#7	.3297	.4220	6.313	4.438	.4062	C24242
#8	.3971	.5050	7.188	5.188	.4375	C24243
#9	.4805	.6066	8.313	6.063	.5625	C24244
#10	.5799	.7216	9.313	6.813	.6250	C24245

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
Bright	☆			☆						☆			

☆ = Best Performance ♦ = Acceptable

Styles: 657, 659
Taper Pin
 Straight & Helical Flute

Note

 Operating parameters
 begin on page 121.

 ANSI
 SIZES

HSS

1/4" / 12"


 LHS /
 RHC

 Straight
 Flute


 Square
 Shank

 Surface
 Treatment

Bright

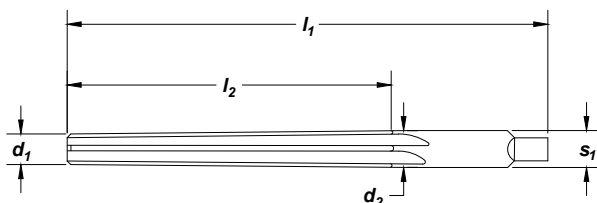

Style 657 - Straight Flute

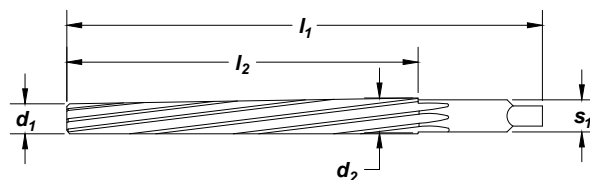

Style 659 - LHH/RHC

pin size	small end dia. d ₁ (in)	large end dia. d ₂ (in)	overall length L ₁ (in)	flute length L ₂ (in)	shank dia. s ₁ (in)	order number	
						657	659
						straight flute	helical flute
#6/0	.0611	.0806	1.938	.938	.0938	C24250	C24271
#5/0	.0719	.0966	2.188	1.188	.1094	C24251	C24272
#4/0	.0869	.1142	2.313	1.313	.1250	C24252	C24273
#3/0	.1029	.1302	2.313	1.313	.1406	C24253	C24274
#2/0	.1137	.1462	2.563	1.563	.1562	C24254	C24275
#0	.1287	.1638	2.938	1.688	.1719	C24255	C24276
#1	.1447	.1798	2.938	1.688	.1875	C24256	C24277
#2	.1605	.2008	3.188	1.938	.2031	C24257	C24278
#3	.1813	.2294	3.688	2.313	.2344	C24258	C24279
#4	.2071	.2604	4.063	2.563	.2656	C24259	C24280
#5	.2409	.2994	4.313	2.813	.3125	C24260	C24281
#6	.2773	.3540	5.438	3.688	.3594	C24261	C24282
#7	.3297	.4220	6.313	4.438	.4062	C24262	C24283
#8	.3971	.5050	7.188	5.188	.4375	C24263	C24284
#9	.4805	.6066	8.313	6.063	.5625	C24264	C24285
#10	.5799	.7216	9.313	6.813	.6250	C24265	C24286

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆				☆	☆	☆			

☆ = Best Performance ◆ = Acceptable

Note
Pilots listed on page 125.

ANSI
SIZES


HSS

RH
Spiral
Flute

Straight
Shank

Surface
Treatment

Bright

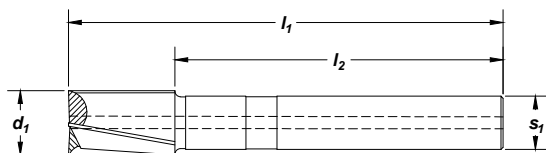

counterbore diameter d₁		pilot shank sizes		shank length L₂ (in)	overall length L₁ (in)	shank diameter S₁ (in)	pilot size range	no. of flutes	order no.
fraction	in	fraction	in						879
3/16	.1875	3/32	.0938	2.125	3.000	.234	1/8 - 3/16	3	C46421
7/32	.2188	3/32	.0938	2.125	3.000	.234	1/8 - 7/32	3	C46422
1/4	.2500	3/32	.0938	3.063	3.813	.234	1/8 - 3/16	3	C46423
9/32	.2812	3/32	.0938	3.063	3.813	.266	1/8 - 7/32	3	C46424
5/16	.3125	3/32	.0938	3.063	3.813	.297	1/8 - 1/4	3	C46425
11/32	.3438	3/32	.0938	3.063	3.813	.313	1/8 - 9/32	3	C46426
3/8	.3750	5/32	.1562	3.063	4.063	.313	3/16 - 5/16	3	C46427
13/32	.4062	5/32	.1562	3.063	4.063	.375	3/16 - 11/32	3	C46428
7/16	.4375	5/32	.1562	3.063	4.063	.375	3/16 - 3/8	3	C46429
15/32	.4688	3/16	.1875	3.063	4.313	.438	1/4 - 13/32	3	C46430
1/2	.5000	3/16	.1875	3.063	4.313	.438	1/4 - 7/16	3	C46431
17/32	.5312	3/16	.1875	3.063	4.313	.500	1/4 - 15/32	3	C46432
9/16	.5625	3/16	.1875	3.063	4.313	.500	1/4 - 1/2	3	C46433
19/32	.5938	3/16	.1875	3.875	5.125	.500	1/4 - 17/32	3	C46434
5/8	.6250	3/16	.1875	3.875	5.125	.500	1/4 - 9/16	3	C46435
21/32	.6562	3/16	.1875	3.875	5.125	.500	1/4 - 19/32	3	C46436
11/16	.6875	3/16	.1875	3.875	5.125	.500	1/4 - 5/8	3	C46437
23/32	.7188	1/4	.2500	3.875	5.375	.500	5/16 - 21/32	3	C46438
3/4	.7500	1/4	.2500	3.875	5.375	.500	5/16 - 11/16	3	C46439
25/32	.7812	1/4	.2500	3.875	5.375	.625	5/16 - 23/32	3	C46440
13/16	.8125	1/4	.2500	3.875	5.375	.625	5/16 - 3/4	3	C46441
7/8	.8750	1/4	.2500	3.875	5.375	.750	5/16 - 13/16	3	C46443
15/16	.9375	1/4	.2500	4.625	6.125	.750	5/16 - 7/8	3	C46445
1	1.0000	5/16	.3125	4.625	6.375	.750	3/8 - 15/16	3	C46447
1-1/16	1.0625	5/16	.3125	4.625	6.375	.750	3/8 - 1	3	C46448
1-1/8	1.1250	5/16	.3125	4.625	6.375	1.000	3/8 - 1-1/16	3	C46449

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright	☆			☆				☆	☆	☆			

☆ = Best Performance ◆ = Acceptable

Note

Pilot listed on page 125.


ANSI
SIZES

HSS

Straight
Shank

Surface
Treatment

Bright

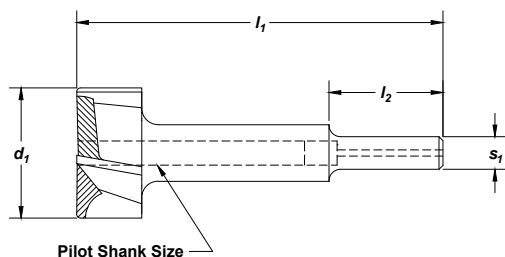

counterbore diameter d₁		pilot shank sizes		shank length l₂ (in)	overall length l₁ (in)	shank diameter s₁ (in)	pilot size range	no. of flutes	order no. 884
fraction	in	fraction	in						
1/4	.2500	3/32	.0938	1.125	2.375	.250	1/8 - 3/16	4	C46886
5/16	.3125	3/32	.0938	.875	2.375	.250	1/8 - 1/4	4	C46888
3/8	.3750	3/32	.0938	.875	2.375	.250	3/16 - 5/16	4	C46890
13/32	.4062	1/8	.1250	.875	2.813	.250	3/16 - 11/32	4	C46891
7/16	.4375	1/8	.1250	.875	2.813	.250	3/16 - 3/8	4	C46892
15/32	.4688	1/8	.1250	.875	2.813	.250	1/4 - 13/32	4	C46893
1/2	.5000	1/8	.1250	.875	2.813	.250	1/4 - 7/16	4	C46894
9/16	.5625	1/8	.1250	.875	2.813	.250	1/4 - 1/2	4	C46896
5/8	.6250	1/8	.1250	.875	2.813	.250	1/4 - 9/16	4	C46898
11/16	.6875	3/16	.1875	.875	2.813	.250	1/4 - 5/8	4	C46900
3/4	.7500	3/16	.1875	.875	2.813	.250	5/16 - 11/16	4	C46902
13/16	.8125	3/16	.1875	.875	2.813	.250	5/16 - 3/4	4	C46904
7/8	.8750	3/16	.1875	.875	2.813	.250	5/16 - 13/16	4	C46906
15/16	.9375	3/16	.1875	.875	2.813	.250	5/16 - 7/8	4	C46908
1	1.0000	3/16	.1875	.875	2.813	.250	3/8 - 15/16	4	C46910


TECH TIPS
Aircraft Type Counterbores

- Designed for aircraft fabricating use with portable pneumatic and electric drills.
- Smaller pilot holes than standard counterbores.
- Corner radius of 1/32" is standard.

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆				☆	☆	☆			

☆ = Best Performance ◆ = Acceptable

Interchangeable Pilot for Counterbore & Spot Facer

Style: **879P**



Note


For pilot diameter, match pilot shank size, from style #884 or #879, to pilot shank size **S₁** in these columns.

ANSI
SIZES

HSS

Surface
Treatment

Bright

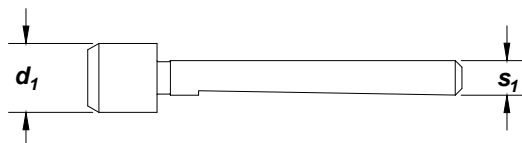

pilot diameter d₁	decimal equiv.	S₁ order number 879P							
		3/32"	1/8"	5/32"	3/16"	1/4"	5/16"	3/8"	7/16"
3/32	.0938	C46520	—	—	—	—	—	—	—
.127	.1250	C46525	—	—	—	—	—	—	—
1/8	.1250	C46523	C46522	—	—	—	—	—	—
5/32	.1562	C46528	C46527	C46529	—	—	—	—	—
.157	.1570	C46531	—	—	—	—	—	—	—
.159	.1590	C46533	—	—	—	—	—	—	—
3/16	.1875	C46538	C46537	C46539	C46540	—	—	—	—
.191	.1910	C46545	C46544	—	C46546	—	—	—	—
13/64	.2031	—	C46547	—	—	—	—	—	—
7/32	.2188	C46549	C46548	C46550	C46551	—	—	—	—
1/4	.2500	C46554	C46553	C46555	C46556	C46557	—	—	—
.255	.2550	—	C46558	—	C46560	—	—	—	—
5/16	.3125	C46570	C46569	C46571	C46572	C46573	—	—	—
11/32	.3438	—	C46576	C46578	C46579	C46580	—	—	—
3/8	.3750	C46314	C46583	C46584	C46585	C46586	C46587	—	—
13/32	.4062	—	—	—	C46592	C46593	C46594	—	—
7/16	.4375	—	—	C46597	C46598	C46599	C46600	—	—
15/32	.4688	—	—	—	C46605	—	—	—	—
1/2	.5000	—	—	—	C46612	C46613	C46614	—	—
17/32	.5312	—	—	—	C46620	C46621	C46622	—	—
9/16	.5625	—	—	—	—	C46629	C46630	—	—
19/32	.5938	—	—	—	—	—	—	C46639	—
9/32	.5938	—	—	C46565	C46566	—	—	—	—
5/8	.6250	—	—	—	—	C46645	—	C46647	—
11/16	.6875	—	—	—	—	C46657	C46658	C46659	—
3/4	.7500	—	—	—	C46316	—	—	C46669	—
25/32	.7812	—	—	—	—	—	C46673	C46674	—
13/16	.8125	—	—	—	—	—	C46678	C46679	—
7/8	.8750	—	—	—	—	C46687	—	—	—
1	1.0000	—	—	—	—	—	—	—	—
1-1/16	1.0625	—	—	—	—	—	—	—	C46716
1-1/8	1.1250	—	—	—	—	—	—	C46723	—

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32	☆	☆	☆	>45
Bright	☆			☆				☆	☆	☆			

☆ = Best Performance ◆ = Acceptable

Style: 655
**Clearance or
Taper Router**


ANSI
SIZES

HSS

Straight
Shank

Surface
Treatment

Bright

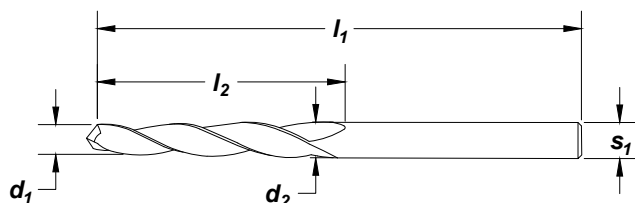

size number	shank diameter S_1 (in)	small end diameter d_1 (in)	large end diameter d_2 (in)	flute length L_2 (in)	overall length L_1 (in)	order no. 655
#1	.098	.081	.0980	.813	2.000	C24292
#2	.128	.110	.1280	.875	2.250	C24293
#3	.188	.165	.1875	1.063	2.500	C24294
#4	.250	.224	.2500	1.250	2.750	C24295

Counterbore
High Speed Steel


TECH TIPS
Clearance or Taper Router

- Use for cutting, trimming, routing, and elongating existing holes.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆				☆	☆	☆			

☆ = Best Performance

◆ = Acceptable

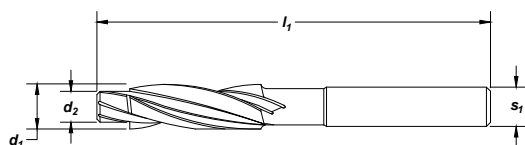

counterbore number	cutter diameter d_1 (in)	pilot diameter d_2 (in)	shank diameter s_1 (in)	overall length l_1 (in)	cap screw size	order no. 183
183-CSS-6	.230	.135	.219	3.000	No. 6	C91695
183-CSS-7	.242	.150	.219	3.000	No. 6	C91696
183-CSS-8	.274	.161	.250	3.000	No. 8	C91697
183-CSS-9	.286	.178	.250	3.000	No. 8	C91698
183-CSS-10	.316	.187	.313	3.500	No. 10	C91699
183-CSS-11	.328	.204	.313	3.500	No. 10	C91700
183-CSS-12	.348	.213	.344	3.500	No. 12	C91701
183-CSS-16	.375	.250	.375	3.500	No. 12	C91703
183-CSS-17	.391	.266	.375	5.750	1/4	C92704
183-CSS-18	.406	.281	.375	5.750	1/4	C92705
183-CSM-6	.433	.268	.438	6.000	6mm	C91830
183-CSS-20	.438	.313	.438	6.000	5/16	C92706
183-CSS-21	.453	.328	.438	6.000	5/16	C92708
183-CSS-20-60	.469	.313	.438	6.000	5/16	C92707
183-CSS-22	.469	.344	.438	6.000	5/16	C91710
183-CSS-21-60	.484	.328	.438	6.000	5/16	C91709
183-CSS-22-60	.500	.344	.438	6.000	5/16	C91711
183-CSS-24	.563	.375	.500	6.500	3/8	C91712
183-CSS-25	.578	.391	.500	6.500	3/8	C91713
183-CSS-26	.594	.406	.500	6.500	3/8	C91714
183-CSS-28	.625	.438	.500	7.000	7/16	C91715
183-CSS-29	.641	.453	.500	7.000	7/16	C91717
183-CSS-30	.656	.469	.500	7.000	7/16	C91719
183-CSS-30-60	.688	.469	.500	7.000	7/16	C91720
183-CSM-10	.709	.433	.500	7.000	10mm	C91832
183-CSS-32	.750	.500	.500	7.250	1/2	C91721
183-CSS-33	.766	.516	.500	7.250	1/2	C91722
183-CSS-34	.781	.531	.500	7.250	1/2	C91723
183-CSM-12	.787	.531	.500	7.000	12mm	C91833
183-CSS-36	.813	.563	.750	7.500	9/16	C91724
183-CSS-40	.875	.625	.750	8.250	5/8	C91726
183-CSS-42	.906	.656	.750	8.250	5/8	C91728
183-CSS-42-60	.969	.656	.750	8.250	5/8	C91729
183-CSM-16	1.024	.689	.750	8.250	16mm	C91834
183-CSS-50	1.031	.781	1.000	8.813	3/4	C91734
183-CSS-50-60	1.156	.781	1.000	8.813	3/4	C91735
183-CSS-52-60	1.188	.813	1.000	8.813	3/4	C91737
183-CSM-20	1.299	.866	1.000	8.813	20mm	C91835
183-CSS-68-60	1.563	1.063	1.000	8.813	1	C91749
183-CSM-24	1.575	1.024	1.000	8.813	24mm	C92836

set number	no. of pieces	size range	order number
183-CSS-1	9	CSS-6, -8, -10, -12, -16, -20, -24, -28, -32	C91750
183-CSS-3	8	CSS-18, -20-60, -21-60, -22-60, -22, -26, -30, -34	C91770

#C91750



#C91770



Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright	☆		☆					☆	☆			

☆ = Best Performance ◆ = Acceptable

Cost Saving Sets

Screw Machine / Stub Length Drills

	Type	Style	Order No.	Number of pieces	Surface Treatment				Material		Size Range	Case Type	
					Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
	General Purpose	2120	C00980	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C01332	26	•	•	•	•	•	•	letter A through Z	•	•
	NAS907-C Heavy Duty	2330	C70370	15	•	•	•	•	•	•	1/16" through 1/2" x 1/32"	•	•
			C70369	21	•	•	•	•	•	•	1/16" through 3/8" x 1/64"	•	•
			C70368	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•

#C00980

#C01332

#C70370

#C70369

#C70368



Jobber Drills

	Type	Style	Order No.	Number of pieces	Surface Treatment				Material		Size Range	Case Type	
					Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
	General Purpose	2001G	C72197	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C71000	25	•	•	•	•	•	•	1 mm through 13 mm x 0.5 mm	•	•
			C00960	50	•	•	•	•	•	•	1 mm through 5.9 mm x 0.1 mm	•	•
	General Purpose	2002G	C72199	15	•	•	•	•	•	•	1/16" through 1/2" x 1/32"	•	•
			C72198	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C00939	26	•	•	•	•	•	•	letter A through Z	•	•
			C00934	60	•	•	•	•	•	•	wire gauge #1 through #60	•	•
			C01330	115	•	•	•	•	•	•	1/16" through 1/2" x 1/16", A through Z and #1 through #60	•	•
			C72000	25	•	•	•	•	•	•	1 mm through 13 mm x 0.5 mm	•	•
	General Purpose	2002	C00937	20	•	•	•	•	•	•	#61-#80	•	•
			C00901	15	•	•	•	•	•	•	1/16" through 1/2" x 1/32"	•	•
	Q-Cobalt Wide Land Parabolic	2075	C00902	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C70371	20	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
	NAS907-B Heavy Duty	2222	C70365	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•
			C00986	26	•	•	•	•	•	•	A through Z letter	•	•
			C70366	60	•	•	•	•	•	•	#1 through #60 wire gauge	•	•
			C70367	115	•	•	•	•	•	•	1/16" through 1/2" x 1/64", A through Z and #1 through #60	•	•
	Q-AMD Short Flute	3780	C14499	29	•	•	•	•	•	•	1/16" through 1/2" x 1/64"	•	•

#C72197

#C71000

#C00960

#C72199

#C72198

#C00939

#C00934

#C01330

#C72000



#C00937

#C00901

#C00902

#C70371

#C70365

#C00366

#C00986

#C70367

#C14499


Cost Saving Sets

Taper Length Drills

Taper Length Drills					Surface Treatment		Material		Size Range		Case Type		
				Number of pieces	Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
					•	•	•	•	•	•		•	•
	Type	Style	Order No.	29							1/16" through 1/2" x 1/64"	•	

Misc. Drills

Misc. Drills					Surface Treatment			Material		Size Range		Case Type		
		Type	Style	Order No.	Number of pieces	Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
		Spotting / Centering	2636	C26173	6			•		•	•	90° - 1/4" through 1" (short)		•
				C26180	6			•		•	•	120° - 1/4" through 1" (short)		•
2646			C26187	6			•		•	•	90° - 1/4" through 1" (long)		•	
			C26194	6			•		•	•	120° - 1/4" through 1" (long)		•	
2635		C24173	6	•			•		•	•	90° - 1/4" through 1" (short)		•	
		C24180	6	•					•		120° - 1/4" through 1" (short)		•	
		2645	C24187	6	•					•		90° - 1/4" through 1" (long)		•
			C24194	6	•					•		120° - 1/4" through 1" (long)		•
	Countersink / Deburring	3001	C94588	4	•					•	•	60° - 5/16, 3/8, 1/2, 5/8		•
			C94589	4	•					•	•	82° - 5/16, 3/8, 1/2, 5/8		•
			C94590	4	•					•	•	90° - 5/16, 3/8, 1/2, 5/8		•
			C94591	4	•					•	•	100° - 5/16, 3/8, 1/2, 5/8		•
			C94592	5	•					•	•	60° - 5/16, 3/8, 1/2, 3/4, 1		•
			C94593	5	•					•	•	82° - 5/16, 3/8, 1/2, 3/4, 1		•
			C94594	5	•					•	•	90° - 5/16, 3/8, 1/2, 3/4, 1		•
			C94595	5	•					•	•	100° - 5/16, 3/8, 1/2, 3/4, 1		•
	Countersink / Drill Plain	998	C00944	5	•				•		#1 through #5		•	
	Single Flute Countersink	10001	C00970	5		•				•		60° - 1/4" through 3/4" x 1/8"		•
			C00971	5		•				•		82° - 1/4" through 3/4" x 1/8"		•
	3 Flute Countersink	10003	C00972	5		•				•		60° - 1/4" through 3/4" x 1/8"		•
			C00973	5		•				•		82° - 1/4" through 3/4" x 1/8"		•
	4 Flute Reamer / Countersink	610	C00969	5		•				•		82° - 1/4" through 3/4" x 1/8"		•

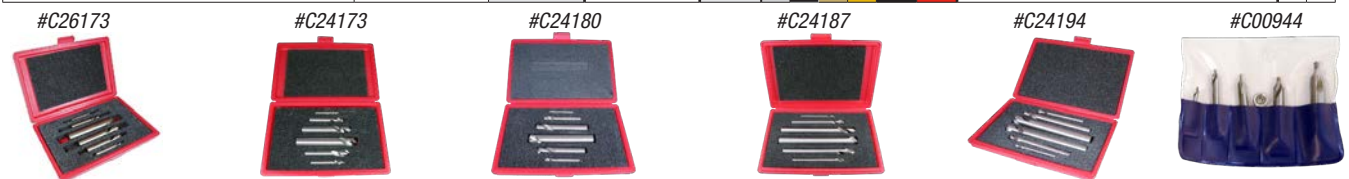

Reamers

Reamers									Surface Treatment	Material	Size Range	Case Type	
				Number of pieces	Bright	Black Oxide	Straw Oxide	TIN	HSS	Cobalt		Metal	Plastic
	Type	Style	Order No.	29	•				•		1/16" through 1/2" x 1/64"	•	
Straight Shank, Straight Flute													
4001													
C00964													

Counterbores

Counterbores					Surface Treatment	Material		Size Range		Case Type					
	Type	Style	Order No.	Number of pieces	Bright	Black Oxide	Straw Oxide	TiN	HSS	Cobalt	#C91750	#C91770	Metal	Plastic	
	3 Flute Continuous Pilot	183 <i>(Set #183-CSS-1)</i>	C91750		9	•				•			CSS-6, -8, -10, -12, -16, -20, -24, -28, -32		•
		183 <i>(Set #183-CSS-3)</i>	C91770		8	•				•			CSS-18, -20-60, -21-60, -22-60, -22, -26, -30, -34		•

Nomenclature

Technical Information

Technical Information

Nomenclature	120
High Speed Steel Drills	
Material Class	121
Operating Parameters	122
Surface Treatments	123
Special Drills	123
Cobalt Drills	
Material Class	124
Operating Parameters	125

Drill Cutting Speeds	126
Dimensional Specifications	129
Shank / Tang	135
Morse Taper Shank	135
Reamers	
Custom Reamers	136
Reamer Speeds and Feeds	138
Tolerances / Regrinding	139
Reamer Cutting Speeds	140

Drill Nomenclature

Axis

The imaginary straight line which forms the longitudinal center line of the drill.

Back Taper

A slight decrease in diameter, from front to back in the body of the drill.

Body

The portion of the drill extending from the shank or neck to the outer corners of the cutting lips.

Body Diameter Clearance

That portion of the land that has been cut away so it will not rub against the walls of the hole.

Chisel Edge

The edge at the end of the web that connects the cutting lips.

Drill Diameter

The diameter over the margins of the drill measured at the point.

Flutes

Helical or straight grooves cut or formed in the body of the drill to provide cutting lips, to permit removal of chips, and to allow cutting fluid to reach the cutting lips.

Flute Length

The length from the outer corners of the cutting lips to the extreme back end of the flutes. However, metric drills are measured from the extreme end of the shank to the end of the flute at the point.

Land

The peripheral portion of the body between adjacent flutes.

Land Width

The distance between the leading edge and the heel of the land measured at a right angle to the leading edge.

Lip Relief

The axial relief on the drill point.

Margin

The cylindrical portion of the land which is not cut away to provide clearance.

Neck

The section of reduced diameter between the body and the shank of a drill.

Overall Length

The length from the extreme end of the shank to the outer corners of the cutting lips. However, metric drills are measured from the extreme end of the shank to the end of the flute at the point.

Point

The cutting end of a drill, made up of the ends of the lands and the web. In form it resembles a cone, but departs from a true cone to furnish clearance behind the cutting lips.

Point Angle

The angle included between the cutting lips projected upon a plane parallel to the drill axis and parallel to the two cutting lips.

Shank



The part of the drill by which it is held and driven.

Tang

The flattened end of a taper shank, intended to fit into a driving slot in a socket.

Web

The central portion of the body that joins the lands. The extreme end of the web forms the chisel edge on a two flute drill.

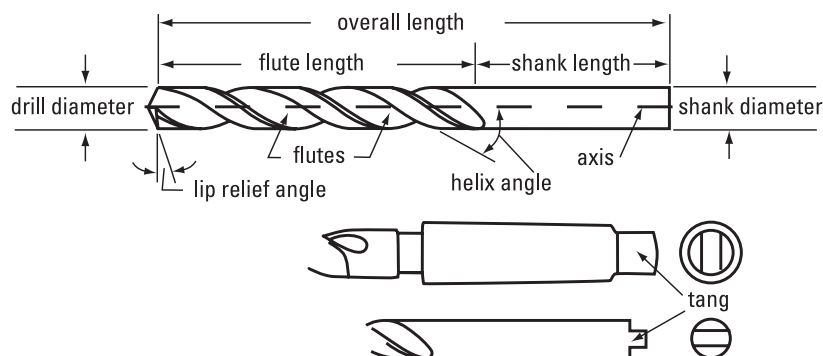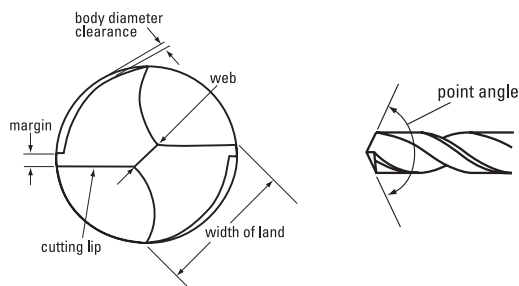

Recommended Surface Feet per Minute (SFM) and Coolant by Material Application
Ferrous Materials

Materials	Brinell Hardness	geometry	SFM	coolant
Low Carbon Steel	85-125	general-purpose	80-95	soluble oil
Medium Carbon Steel	125-175	general-purpose	70-85	soluble oil
High Carbon Steel	175-225	heavy-duty	45-65	soluble oil
Steels Alloyed	under 200	general-purpose	60-90	soluble oil
	200-300	heavy-duty	40-70	soluble oil
	over 300	cobalt	20-30	soluble oil
Steel Drop Forgings Heat Treated	330-370		30-40	cutting oil
	370-420		20-30	cutting oil
	over 420		10-20	cutting oil
Grey Cast Iron Soft	125	general-purpose	140-150	dry
Grey Cast Iron Medium	120-200	heavy-duty	50-80	soluble oil
Grey Cast Iron Hard	up to 350	heavy-duty	25-40	soluble oil
Titanium Alloys (Ti)-75A	300-440	cobalt	50-60	cutting oil
Ti-150A, RS-120	300-440	cobalt	40-50	cutting oil
Ti-140A, RC 130B	300-440	cobalt	30-40	cutting oil
Ti-6AL -4V	300-440	cobalt	20-30	cutting oil
300 Series Stainless	120-200	cobalt	20-40	cutting oil
400 Series Stainless	200-300	cobalt	40-70	cutting oil
Martensitic 416, 420, F416 Plus K, 400F, 416SE, 440F	135-185	cobalt	40-50	cutting oil
Precipitation Hardening	325-375	cobalt	30	cutting oil
Stainless Steel, Cast	400-450	cobalt	20	cutting oil
Heat Resisting Steels	175-225	cobalt	10-25	cutting oil
Nimonic Alloys	200-300	cobalt	10-20	cutting oil
Manganese 12-14% min	125-220	heavy-duty	10-12	cutting oil
Spring Steels	402	cobalt	15-30	soluble oil
Armor Plate	200-250	cobalt	40	soluble oil
	250-300	cobalt	35	soluble oil
	300-350	cobalt	30	cutting oil

Non-Ferrous Materials

Materials	Brinell Hardness	geometry	SFM	coolant
Aluminum Pure	140-350	fast spiral*	130-200	soluble oil
Aluminum Alloys	140-330	fast spiral*	150-300	soluble oil
Aluminum Leaded	40-100	fast spiral*	200-325	soluble oil
Aluminum Silicon Alloy Die Cast	40-100	fast spiral*	25-50	soluble oil
Brass	190-210	slow spiral*	200-250	cutting or soluble oil
Bronze	150-200	slow spiral*	200-250	soluble oil
Copper - Nickel & Copper Tin Alloy	65-100	general-purpose*	140-200	cutting or soluble oil
Copper - Aluminum Alloys	30-100	general-purpose*	120-200	cutting or soluble oil
Magnesium Alloys - Wrought	50-90	general-purpose*	140-330	cutting or soluble oil
Magnesium Alloys - Cast	50-90	general-purpose*	140-365	cutting or soluble oil
Nickel Alloys - Wrought and Cast	80-170	general-purpose	70	cutting or soluble oil
Nickel Alloys - Monel	115-240	general-purpose	55	cutting or soluble oil
Nickel Alloys - Beryllium Nickel	200-250	general-purpose	12	cutting or soluble oil
Zinc Alloy	112-126	general-purpose	200-250	soluble oil

**bright only*

Determining Feed and Speed

This Cleveland catalog offers starting feed and speed parameters for each style of tool. The recommended operating parameters are found in front of each tool style for high-performance tools and in the beginning of the general application section for those tools. Drill cutting speed tables for individual sizes of drills can be found in this section, titled "Drill Cutting Speeds".

To determine your own starting speeds and feeds, follow this procedure.

Look up the material to be drilled in the Recommended SFM (surface feet per minute) by material class table in this section, titled "Material Class" and determine the geometry class.

Determine the drill style from the Drill Style by Geometry and Length/Construction table on page 3 based on recommended drill type and drill length desired.

Review each drill style to understand the geometry differences. Select the appropriate geometry and check to ensure the desired size is available.

Starting speed and feed recommendations for the drill can be determined from the formulas below.

Recommended operating parameters for high-performance drills are generally 20% faster than for conventional geometries and are shown with the individual drill styles. Feed rates for high performance drills are heavier than for conventional geometries by 50% or more.

Drill Diameter Tolerances

Diameter Range (inches)	Plus (+) (inches)	Minus (-) (inches)
through 1/8	.0000	.0005
over 1/8 through 1/4	.0000	.0007
over 1/4 through 1/2	.0000	.0010
over 1/2 through 1	.0000	.0012
over 1 through 2	.0000	.0015
over 2 through 3-1/2	.0000	.0020

Drill Overall Length and Flute Length Tolerances

Diameter Range (inches)	Plus (+) (inches)	Minus (-) (inches)
#80 through 1/8	.1250	.0625
over 1/8 through 1/2	.1250	.1250
over 1/2 through 1	.2500	.1250
over 1 through 2	.2500	.2500
over 2 through 3-1/2	.3750	.3750

Drill Point Angle Tolerances

Diameter Range (inches)	Included Angle (degrees)	Tolerance (degrees)
1/16 through 1/2	118° or 135°	± 5°
over 1/2 through 1-1/2	118°	± 3°
over 1-1/2 through 3-1/2	118°	± 2°

Drill Lip Height Tolerances

Diameter Range (inches)	Total Indicator Variation (inches)
1/16 through 1/8	.0020
over 1/8 through 1/4	.0030
over 1/4 through 1/2	.0040
over 1/2 through 1	.0050
over 1 through 3-1/2	.0060

Drill Definitions

RPM = revolutions per minute
 SFM = surface feet per minute
 FR = feed rate in inches per minute
 IPR = inches per revolution

Drill Formula



$RPM = 3.8 \times SFM / \text{drill diameter}$
 $SFM = 0.26 \times RPM \times \text{drill diameter}$
 $FR = RPM \times IPR$

Drill Feeds

Diameter Range (inches)	IPR (inches per revolution)	
	Normal Feeds	Heavy Feed
1/16 through 1/8	.001 - .002	.002 - .004
over 1/8 through 1/4	.002 - .004	.004 - .008
over 1/4 through 1/2	.004 - .008	.008 - .016
over 1/2 through 1	.008 - .016	.016 - .024
over 1	.016 - .024	.024 - .032

Surface Treatment	Recommended Applications	Precautions
TiN (Titanium Nitride)	For ferrous and non-metallic materials: free-machining steels and irons, high tensile steels, tough machining steels, plastics, hard rubber, and fiber. The hard, smooth treatment increases tool life, improves finish, and allows higher speeds.	Avoid titanium and titanium alloys due to tendency to gall.
TiCN (Titanium Carbonitride)	For ferrous and non-ferrous materials: cast iron, aluminum, stainless steel, brass, abrasive materials, high-silicon automotive aluminum, glass-filled plastics, and composites. The hard, smooth treatment increases tool life and improves finish.	Use with caution in titanium, titanium alloys, and aluminum die casting due to tendency to gall.
TiAlN (Titanium Aluminum Nitride)	For ferrous materials, high-temperature alloys, and titanium: stainless steels, gray cast irons or nodular irons, and steels containing high-nickel, cobalt, chromium, and tungsten. Most effective where higher speeds are available.	Avoid in most non-ferrous materials.
CrN (Chromium Nitride)	For non-ferrous materials: brass, bronze, zinc alloys, and magnesium alloys. CrN is medium-hard and has a lower wear resistance than TiN, TiCN, and TiAlN. However, unlike these treatments, CrN does not gall in non-ferrous materials.	Ineffective in ferrous materials.

Special Drills

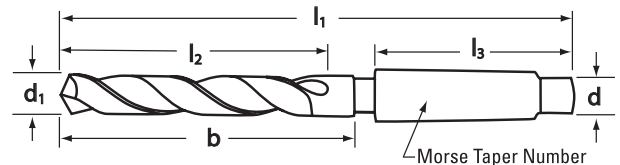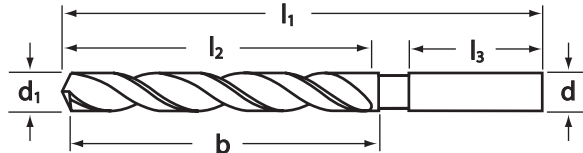

If you know the specs for your special tool, please send a blueprint and/or provide this information:

- Material/hardness to be drilled.
- d = shank diameter or size.**
 - If standard taper shank is ordered, specify as No. 2 American National Standard Taper, No. 3 American National Standard Taper, etc.
 - If taper shank is special, give diameter at small end, length of shank, diameter at large end, taper per foot, and furnish a sample of gauge if possible.
 - If tang is special, give thickness and length.
- b = body length.**
- d¹ = diameter of fluted section.** For multiple diameter drills, indicate the diameter of the large fluted section
- l¹ = overall length.**
 - When ordering extra-length drills, specify: type of material being drilled, depth of hole, whether drilling in a vertical or horizontal position, and whether feed is intermittent or with only occasional withdrawals.
- l² = flute length.**
- l³ = shank length.**

For multiple-diameter drills, provide:

- the diameter of the small, fluted section
- the included angle of cutting shoulder. Note: this is measured as an angle between the two cutting edges (included angle) and not as an angle with the center line.
- the length of small diameter. Note: this is measured from the outer corner of the point to the bottom or inner corner of the cutting shoulder.

For special accuracy requirements, give tolerances on the important dimensions.

For assistance in designing your special tool, provide

- Workpiece material hardness
- Depth of hole
- Shank type
- Step length if necessary
- Hole diameter
- Thru hole or blind hole
- Coolant or non-coolant
- Step angle

Make sure that suitable allowance has been made for re-sharpening and for clearance for the spindle above the drill bushings. If a particular style of flute-construction is desired, it should be specified by reference to the regular drill of the required flute-style.

Material Class

Technical Information

TECHNICAL

Cobalt

		Speeds (SFM) Drill Surface Treatment				Feed Rate (IPR) increase by 25% for TiCN			
Ferrous Material									
		Bright, Black Oxide & Straw				1/8"	1/4"	3/8"	1/2"
Material	Hardness	TiN	TiCN	TiAlN		3.17mm	6.35mm	9.52mm	12.70mm
low carbon steel	85-125 Bhn	90	125	135	—	.0040	.0065	.0080	.0100
medium carbon steel	125-175 Bhn	90	125	135	—	.0040	.0065	.0080	.0100
high carbon steel	175-225 Bhn	90	125	135	—	.0030	.0050	.0065	.0080
alloyed steel	200-300 Bhn	60	80	90	—	.0025	.0040	.0050	.0065
heat-treatable steel and forgings	370-420 Bhn	40	50	60	70	.0025	.0040	.0050	.0065
tool steels	< 24 HRC	60	80	90	110	.0030	.0050	.0065	.0080
	> 24-30 HRC	30	40	45	55	.0025	.0040	.0050	.0065
high-speed steels	14-30 HRC	35	50	55	60	.0025	.0040	.0050	.0065
gray cast iron	240 Bhn	115	160	175	—	.0050	.0080	.0100	.0125
	<300 Bhn	90	125	135	—	.0050	.0080	.0100	.0125
mallable cast iron	<300 Bhn	70	95	105	—	.0050	.0080	.0100	.0125
chilled cast iron	<350 Bhn	25	35	40	—	.0025	.0040	.0050	.0065
stainless steel									
300 series (Austenetic)	120-200 Bhn	60	80	90	100	.0025	.0040	.0050	.0065
400 series (Martensitic)	200-300 Bhn	40	50	60	80	.0025	.0040	.0050	.0065
sulphurized	> 25 HRC	45	65	70	80	.0025	.0040	.0050	.0065
spring steel	400 Bhn	25	35	40	45	.0020	.0030	.0040	.0050
Non-Ferrous Material									
		Bright, Black Oxide & Straw				1/8"	1/4"	3/8"	1/2"
Material	Hardness	TiN	TiCN	TiAlN		3.17mm	6.35mm	9.52mm	12.70mm
aluminum and aluminum alloys	40-100 Bhn	180	—	—	—	.0050	.0080	.0100	.0125
cast aluminum									
	< 10% Si	200 Bhn	200	275	—	.0050	.0080	.0100	.0125
	> 10% Si	200 Bhn	180	225	—	.0040	.0065	.0080	.0100
brass, long chipping	190-210 Bhn	150	—	—	—	.0040	.0065	.0080	.0100
bronze, long chipping	150-200 Bhn	90	115	—	130	.0030	.0050	.0065	.0080
copper, low alloy	65-100 Bhn	120	145	—	—	.0040	.0065	.0080	.0100
plastics, duraplastics	N/A	55	75	80	—	.0030	.0050	.0065	.0080

The speeds and feeds listed here are conservative recommendations for initial setup. In actual use, depending on the machine environment and workpiece material, significantly higher speeds and feeds may be achievable.

Use these speeds and feeds as a starting point. Cutting conditions can be gradually adjusted until the optimum settings for the application are found.
Questions? Contact Technical Support at 800.892.4281.



Q-Cobalt Advantages

- Deliver close hole tolerance for high-precision work.
- Use higher speeds and feeds for increased productivity.
- Ideal for deep-hole drilling in a wide range of materials.

Technical Information
Operating Parameters

Material	Hardness	Speeds (SFM)		Feed Rate (IPR) for drill diameter					
		Bright		.0625"	.1250"	.2500"	.5000"	.7500"	1.0000"
low carbon steel, annealed	85-125 Bhn	85-150	low	.0005	.0010	.0020	.0040	.0050	.0060
			high	.0015	.0030	.0050	.0090	.0100	.0120
medium carbon steel	275-425 Bhn	65-120	low	.0005	.0010	.0020	.0030	.0040	.0040
			high	.0010	.0020	.0040	.0080	.0900	.0100
hardened steel	48-52 Rc C	30-90	low	.0005	.0010	.0020	.0030	.0040	.0040
			high	.0010	.0030	.0030	.0050	.0060	.0070
stainless steel (soft)	135-275 Bhn	50-150	low	.0005	.0005	.0020	.0040	.0050	.0060
			high	.0010	.0030	.0060	.0060	.0080	.0100
stainless steel (hard)	275-425 Bhn	30-90	low	.0005	.0005	.0010	.0015	.0020	.0025
			high	.0010	.0020	.0030	.0040	.0060	.0070
cast iron (soft)	120-220 Bhn	100-300	low	.0010	.0020	.0040	.0050	.0070	.0090
			high	.0020	.0040	.0080	.0100	.0120	.0140
cast iron (hard)	220-320 Bhn	60-200	low	.0015	.0010	.0020	.0030	.0040	.0050
			high	.0020	.0030	.0040	.0070	.0080	.0100
ductile iron		70-250	low	.0010	.0020	.0030	.0050	.0060	.0070
			high	.0020	.0040	.0060	.0080	.0090	.0150
malleable iron		80-250	low	.0010	.0020	.0030	.0050	.0060	.0070
			high	.0020	.0050	.0060	.0120	.0140	.0150
high-temp alloys, nickel-based		30-90	low	.0005	.0005	.0010	.0015	.0020	.0025
			high	.0010	.0030	.0040	.0050	.0600	.0070
monel, high nickel steels		30-90	low	.0005	.0005	.0010	.0015	.0020	.0025
			high	.0010	.0020	.0030	.0040	.0050	.0060
titanium (soft)		60-200	low	.0005	.0020	.0040	.0050	.0060	.0070
			high	.0010	.0030	.0060	.0060	.0080	.0100
titanium (hard)		45-200	low	.0005	.0010	.0020	.0040	.0040	.0050
			high	.0020	.0040	.0070	.0090	.0100	.0120
refractory alloys		50-200	low	.0005	.0005	.0020	.0040	.0050	.0050
			high	.0010	.0030	.0060	.0100	.0120	.0120
aluminum, aluminum alloys		150-400	low	.0010	.0020	.0030	.0050	—	—
			high	.0020	.0040	.0070	.0130	—	—
brass, bronze		100-300	low	.0005	.0010	.0020	.0040	—	—
			high	.0015	.0030	.0040	.0100	—	—
copper, copper alloys		150-400	low	.0010	.0030	.0050	.0060	—	—
			high	.0030	.0050	.0120	.0140	—	—
magnesium, magnesium alloys		200-650	low	.0015	.0030	.0050	.0080	—	—
			high	.0030	.0070	.0120	.0150	—	—
plastics, glass filled		150-300	low	.0010	.0020	.0030	.0050	—	—
			high	.0020	.0040	.0060	.0120	—	—
plastics		250-600	low	.0015	.0030	.0040	.0060	—	—
			high	.0030	.0050	.0120	.0160	—	—

Higher feed and speed values should be favored for softer materials; lower feed and speed values should be used for harder materials. The above recommendations are for hole depths up to 2 drill diameters.

When hole depths run 3 to 6 times diameters, speeds should be reduced 10% to 35% respectively, and feeds should be reduced 10% to 20% respectively.

Drill Cutting Speeds

Technical Information

Fractional

Drill Size Frac / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
Revolutions per Minute															
1/16 .0625	611	1222	1833	2445	3056	3667	4278	4889	5500	6111	6722	7334	7945	8556	9167
1/8 .1250	306	611	917	1222	1528	1833	2139	2445	2750	3056	3361	3667	3973	4278	4584
3/16 .1875	204	407	611	815	1019	1222	1426	1630	1833	2037	2241	2445	2648	2852	3056
1/4 .2500	153	306	458	611	764	917	1070	1222	1375	1528	1681	1833	1986	2139	2292
5/16 .3125	122	244	367	489	611	733	856	978	1100	1222	1345	1467	1589	1711	1833
3/8 .3750	102	204	306	407	509	611	713	815	917	1019	1120	1222	1324	1426	1528
7/16 .4375	87	175	262	349	437	524	611	698	786	873	960	1048	1135	1222	1310
1/2 .5000	76	153	229	306	382	458	535	611	688	764	840	917	993	1070	1146
5/8 .6250	61	122	183	244	306	367	428	489	550	611	672	733	794	856	917
3/4 .7500	51	102	153	203	255	306	357	407	458	509	560	611	662	713	764
7/8 .8750	44	87	131	175	218	262	306	349	393	436	480	524	568	611	655
1 1.0000	38	76	115	153	191	229	267	306	344	382	420	458	497	535	573
1-1/8 1.1250	34	68	102	136	170	204	238	272	306	340	373	407	441	475	509
1-1/4 1.2500	31	61	92	122	153	183	214	244	275	306	336	367	397	428	458
1-3/8 1.3750	28	56	83	111	139	167	194	222	250	278	306	333	361	389	417
1-1/2 1.5000	26	51	76	102	127	153	178	204	229	255	280	306	331	357	382
1-5/8 1.6250	24	47	70	94	117	141	165	188	212	235	259	282	306	329	353
1-3/4 1.7500	22	44	65	87	109	131	153	175	196	218	240	262	284	306	327
1-7/8 1.8750	20	41	61	81	102	122	143	163	183	204	224	244	265	285	306
2 2.0000	19	38	57	76	95	115	134	153	172	191	210	229	248	267	287
2-1/4 2.2500	17	34	51	68	85	102	119	136	153	170	187	204	221	238	255
2-1/2 2.5000	15	31	46	61	76	92	107	122	137	153	168	183	199	214	229
2-3/4 2.7500	14	28	42	56	69	83	97	111	125	139	153	167	181	194	208
3 3.0000	13	25	38	51	64	76	89	102	115	127	140	153	166	178	191

Letter

Drill Size Letter / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
Revolutions per Minute															
A .2340	163	326	491	654	818	982	1145	1309	1472	1636	1796	1959	2122	2285	2448
B .2380	161	321	482	642	803	963	1124	1284	1445	1605	1765	1926	2086	2247	2407
C .2420	158	316	473	631	789	947	1105	1262	1420	1578	1736	1894	2052	2210	2368
D .2460	155	311	467	622	778	934	1089	1245	1400	1556	1708	1863	2018	2174	2329
E .2500	153	306	458	611	764	917	1070	1222	1375	1528	1681	1834	1986	2139	2292
F .2570	149	297	446	594	743	892	1040	1189	1337	1486	1635	1784	1932	2081	2229
G .2610	146	293	440	585	732	878	1024	1170	1317	1463	1610	1756	1903	2049	2195
H .2660	144	287	430	574	718	862	1005	1149	1292	1436	1580	1723	1867	2010	2154
I .2720	140	281	421	562	702	842	983	1123	1264	1404	1545	1685	1826	1966	2106
J .2770	138	276	414	552	690	827	965	1103	1241	1379	1517	1655	1793	1930	2068
K .2810	136	272	408	544	680	815	951	1087	1223	1359	1495	1631	1767	1903	2039
L .2900	132	263	395	527	659	790	922	1054	1185	1317	1449	1581	1712	1844	1976
M .2950	129	259	389	518	648	777	907	1036	1166	1295	1424	1554	1683	1813	1942
N .3020	126	253	380	506	633	759	886	1012	1139	1265	1391	1518	1644	1771	1897
O .3160	121	242	363	484	605	725	846	967	1088	1209	1330	1450	1571	1692	1813
P .3230	118	237	355	473	592	710	828	946	1065	1183	1301	1419	1537	1657	1774
Q .3320	115	230	345	460	575	690	805	920	1035	1150	1266	1384	1496	1611	1726
R .3390	113	225	338	451	564	676	789	902	1014	1127	1239	1355	1465	1577	1690
S .3480	110	220	329	439	549	659	769	878	988	1098	1207	1317	1427	1537	1646
T .3580	107	213	320	426	533	640	746	853	959	1066	1173	1280	1387	1494	1600
U .3680	104	208	311	415	519	623	727	830	934	1038	1142	1246	1349	1453	1557
V .3770	101	203	304	405	507	608	709	810	912	1013	1114	1219	1317	1418	1520
W .3860	99	198	297	396	495	594	693	792	891	989	1088	1188	1286	1385	1484
X .3970	96	192	289	385	481	576	672	769	865	962	1058	1155	1251	1347	1443
Y .4040	95	189	284	378	473	567	662	756	851	945	1040	1135	1229	1324	1418
Z .4130	92	185	277	370	462	555	647	740	832	925	1017	1110	1202	1295	1387

Technical Information
Drill Cutting Speeds

Diameter Range (inches)	Normal Feeds (IPR)	Heavy Feed (IPR)
from 1/16 thru 1/8	.001-.002	.002-.004
over 1/8 thru 1/4	.002-.004	.004-.008
over 1/4 thru 1/2	.004-.008	.008-.016
over 1/2 thru 1	.008-.016	.016-.024
over 1	.016-.024	.024-.032

Wire Gage

Drill Size Wire / Dec		Feet per Minute														
		10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
		Revolutions per Minute														
1	.2280	168	335	503	670	838	1005	1173	1340	1508	1675	1843	2010	2179	2346	2513
2	.2210	173	345	518	691	864	1037	1210	1382	1555	1728	1901	2074	2247	2420	2593
3	.213	179	359	538	717	897	1076	1255	1434	1614	1793	1974	2152	2331	2511	2690
4	.2090	183	365	548	731	914	1097	1280	1462	1645	1828	2010	2193	2376	2560	2741
5	.2055	186	372	558	744	930	1115	1301	1487	1673	1859	2045	2230	2416	2602	2788
6	.2040	187	374	562	749	936	1123	1310	1498	1685	1872	2060	2247	2434	2621	2809
7	.2010	190	380	570	760	950	1140	1330	1520	1710	1900	2090	2281	2470	2660	2850
8	.1990	192	384	576	768	960	1151	1343	1535	1727	1919	2111	2303	2495	2687	2879
9	.1960	195	390	585	780	975	1169	1364	1559	1754	1949	2144	2339	2534	2728	2923
10	.1935	197	395	592	790	987	1184	1382	1579	1777	1974	2171	2369	2566	2764	2961
11	.1910	200	400	600	800	1000	1200	1400	1600	1800	2000	2200	2400	2600	2800	3001
12	.1890	202	404	606	808	1010	1213	1415	1617	1819	2021	2223	2425	2627	2829	3032
13	.1850	206	413	620	826	1032	1239	1450	1652	1859	2065	2271	2479	2684	2891	3097
14	.1820	210	420	630	840	1050	1259	1469	1679	1889	2099	2309	2518	2728	2938	3148
15	.1800	213	425	638	851	1064	1276	1489	1702	1914	2127	2334	2546	2759	2971	3183
16	.1770	216	432	647	863	1079	1295	1511	1726	1942	2158	2374	2590	2806	3021	3237
17	.1730	221	442	662	883	1104	1325	1546	1766	1987	2208	2429	2650	2870	3091	3313
18	.1695	226	452	678	904	1130	1356	1582	1808	2034	2260	2479	2704	2930	3155	3380
19	.1660	230	460	690	920	1151	1381	1611	1841	2071	2301	2531	2761	2991	3222	3453
20	.1610	237	475	712	949	1186	1423	1660	1898	2135	2372	2610	2847	3084	3322	3559
21	.1590	240	480	721	961	1201	1441	1681	1922	2162	2402	2644	2883	3123	3363	3604
22	.1570	243	487	730	973	1217	1460	1703	1946	2190	2433	2676	2920	3164	3406	3649
23	.1540	248	496	744	992	1240	1488	1736	1984	2232	2480	2728	2976	3224	3472	3720
24	.1520	251	503	754	1005	1257	1508	1759	2010	2262	2513	2764	3016	3267	3518	3769
25	.1495	256	511	767	1022	1276	1533	1789	2044	2300	2555	2810	3066	3322	3577	3832
26	.1470	260	520	779	1039	1299	1559	1819	2078	2338	2598	2858	3118	3378	3638	3898
27	.1440	265	531	796	1061	1327	1592	1857	2122	2388	2653	2919	3183	3448	3714	3979
28	.1405	272	544	816	1088	1360	1631	1903	2175	2447	2719	2990	3262	3534	3806	4078
29	.1360	281	562	843	1124	1405	1685	1966	2247	2528	2809	3090	33701	3651	3932	4213
30	.1285	297	595	892	1189	1487	1784	2081	2378	2676	2973	3270	3567	3864	4162	4459
31	.1200	318	637	955	1273	1592	1910	2228	2546	2865	3183	3501	3821	4138	4456	4775
32	.1160	329	659	988	1317	1647	1976	2305	2634	2964	3293	3622	3951	4281	4610	4939
33	.1130	338	676	1014	1352	1690	2028	2366	2704	3042	3380	3718	4056	4394	4732	5070
34	.1110	344	688	1032	1376	1721	2065	2409	2753	3097	3442	3785	4129	4474	4818	5162
35	.1100	347	694	1042	1389	1736	2083	2430	2778	3125	3472	3821	4167	4514	4861	5209
36	.1065	359	717	1076	1435	1794	2152	2511	2870	3228	3587	3945	4304	4663	5021	5380
37	.1040	367	735	1102	1469	1837	2204	2571	2938	3306	3673	4040	4407	4775	5142	5509
38	.1015	376	753	1129	1505	1882	2258	2634	3010	3387	3763	4140	4516	4892	5269	5645

continued on next page

Drill Cutting Speeds

Technical Information

Wire Gage (continued)

Drill Size Wire / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions per Minute														
39 .0995	384	768	1152	1536	1920	2303	2687	3071	3455	3839	4222	4607	4991	5374	5758
40 .0980	390	780	1169	1559	1949	2339	2729	3118	3508	3898	4287	4677	5067	5457	5846
41 .0960	398	796	1194	1592	1990	2387	2785	3183	3581	3979	4377	4775	5172	5570	5968
42 .0935	408	817	1226	1634	2043	2451	2860	3268	3677	4085	4494	4902	5311	5719	6128
43 .0890	429	858	1288	1717	2146	2575	3004	3434	3863	4292	4721	5150	5579	6008	6438
44 .0860	444	888	1333	1777	2221	2665	3109	3554	3999	4442	4886	5330	5774	6218	6662
45 .0820	466	932	1397	1863	2329	2795	3261	3726	4192	4658	5124	5590	6056	6522	6987
46 .0810	472	943	1415	1886	2358	2830	3301	3773	4244	4716	5187	5659	6130	6602	7074
47 .0785	487	973	1460	1946	2433	2920	3406	3893	4379	4866	5352	5839	6326	6812	7299
48 .0760	503	1005	1508	2010	2513	3016	3518	4021	4523	5026	5528	6031	6534	7036	7539
49 .0730	523	1047	1570	2093	2617	3140	3663	4186	4710	5233	5756	6279	6808	7326	7849
50 .0700	546	1091	1637	2183	2729	3274	3820	4366	4911	5457	6002	6548	7094	7640	8185
51 .0670	570	1140	1710	2280	2851	3421	3991	4561	5131	5701	6271	6841	7413	798	8552
52 .0635	602	1203	1805	2406	3008	3609	4211	4812	5414	6015	6619	7218	7820	8421	9023
53 .0595	641	1283	1924	2566	3207	3848	4490	5131	5773	6414	7062	7704	8346	8988	9630
54 .0550	694	1389	2084	2778	3473	4167	4862	5556	6251	6945	7639	8334	9028	9723	10417
55 .0520	735	1469	2204	2938	3673	4408	5142	5877	6611	7346	8080	8815	9549	10284	11028
56 .0465	821	1643	2465	3286	4108	4929	5751	6572	7394	8215	9036	9857	10678	11500	12322
57 .0430	888	1777	2671	3561	4452	5342	6232	7122	8013	8903	9771	10660	11548	12436	13325
58 .0420	910	1819	2729	3637	4547	5456	6367	7275	8186	9095	10004	10913	11823	12732	13642
59 .0410	932	1863	2795	3726	4658	5590	6521	7453	8388	9316	10248	11180	12111	13043	13975
60 .0400	955	1910	2865	3820	4775	5729	6684	7639	8594	9549	10504	11459	12414	13369	14324
61 .0390	979	1959	2938	3918	4897	5876	6856	7835	8815	9794	10774	11753	12732	13712	14691
62 .0380	1005	2010	3015	4020	5025	6030	7035	8040	9045	10050	11057	12060	13068	14073	15078
63 .0370	1032	2064	3096	4128	5160	6192	7224	8256	9288	10320	11366	12398	13421	14453	15485
64 .0360	1061	2122	3183	4244	5305	6366	7427	8488	9549	10610	11671	12732	13793	14854	15915
65 .0350	1091	2182	3273	4364	5455	6546	7637	8728	9819	10910	12005	13096	14187	15279	16370
66 .0330	1158	2316	3474	4632	5790	6948	8106	9264	10422	11580	12732	13890	15047	16205	17362
67 .0320	1194	2388	3582	4776	5970	7164	8358	9552	10746	11940	13130	14324	15517	16712	17905
68 .0310	1232	2465	3696	4928	6160	7392	8624	9856	11088	12320	13554	14786	16018	17250	18482
69 .0292	1308	2616	3918	5224	6530	7836	9142	10448	11754	13060	14369	15677	17006	18314	19622
70 .0280	1364	2729	4091	5456	6820	8184	9548	10912	12276	13640	15006	16370	17734	19099	20463
71 .0260	1469	2938	4419	5892	7365	8838	10311	11784	13257	14730	16160	17629	19099	20568	22037
72 .0250	1528	3056	4584	6112	7640	9168	10696	12224	13752	15280	16807	18335	19863	21390	22918
73 .0240	1592	3183	4776	6368	7960	9552	11144	12736	14328	15920	17507	19099	20690	22282	23873
74 .0225	1698	3396	5106	6808	8510	10212	11914	13616	15318	17020	18674	20372	22069	23767	25465
75 .0210	1819	3638	5457	7276	9095	10914	12733	14552	16371	18190	20008	21827	23646	25465	27284
76 .0200	1910	3820	5730	7640	9550	11460	13370	15280	17190	19100	21008	22918	24828	26738	28648
77 .0180	2122	4244	6366	8488	10610	12732	14854	16976	19098	21220	23343	25465	27587	29709	31831
78 .0160	2388	4775	7161	9548	11935	14322	16709	19096	21483	23870	26260	28648	31035	33422	35810
79 .0145	2634	5269	7902	10536	13170	15804	18438	21072	23706	26340	28988	31611	34246	36880	39514
80 .0135	2830	5659	8490	11320	14150	16980	19810	22640	25470	28300	31123	33953	36782	39612	42441

Technical Information
Dimensional Specs
Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Inch Drill Sizes

Drill Sizes	Decimal Equiv.	Screw Machine Length				Jobbers Length				Taper Length			
		flute length		overall length		flute length		overall length		flute length		overall length	
		fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal
1/64	.0156	—	—	—	—	3/16	.1875	3/4	.7500	5/16	.3125	1-1/2	1.5000
80	.0135	—	—	—	—	1/8	.1250	3/4	.7500	5/16	.3125	1-1/2	1.5000
79	.0145	—	—	—	—	1/8	.1250	3/4	.7500	5/16	.3125	1-1/2	1.5000
78	.0160	—	—	—	—	3/16	.1875	7/8	.8750	5/16	.3125	1-1/2	1.5000
77	.0180	—	—	—	—	3/16	.1875	7/8	.8750	5/16	.3125	1-1/2	1.5000
76	.0200	—	—	—	—	3/16	.1875	7/8	.8750	5/16	.3125	1-1/2	1.5000
75	.0210	—	—	—	—	1/4	.2500	1	1.0000	5/16	.3125	1-1/2	1.5000
74	.0225	—	—	—	—	1/4	.2500	1	1.0000	5/16	.3125	1-1/2	1.5000
73	.0240	—	—	—	—	5/16	.3125	1-1/8	1.1250	5/16	.3125	1-1/2	1.5000
72	.0250	—	—	—	—	5/16	.3125	1-1/8	1.1250	5/16	.3125	1-1/2	1.5000
71	.0260	—	—	—	—	3/8	.3750	1-1/4	1.2500	3/4	.7500	2	2.0000
70	.0280	—	—	—	—	3/8	.3750	1-1/4	1.2500	3/4	.7500	2	2.0000
69	.0292	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
68	.0310	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
1/32	.0312	1/2	.5000	1-3/8	1.3750	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
67	.0320	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
66	.0330	—	—	—	—	1/2	.5000	1-3/8	1.3750	3/4	.7500	2	2.0000
65	.0350	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
64	.0360	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
63	.0370	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
62	.0380	—	—	—	—	5/8	.6250	1-1/2	1.5000	3/4	.7500	2	2.0000
61	.0390	—	—	—	—	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
60	.0400	1/2	.5000	1-3/8	1.3750	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
59	.0410	1/2	.5000	1-3/8	1.3750	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
58	.0420	1/2	.5000	1-3/8	1.3750	11/16	.6875	1-5/8	1.6250	1-1/8	1.1250	2-1/4	2.2500
57	.0430	1/2	.5000	1-3/8	1.3750	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/4	2.2500
56	.0465	1/2	.5000	1-3/8	1.3750	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/4	2.2500
3/64	.0469	1/2	.5000	1-3/8	1.3750	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/4	2.2500
55	.0520	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
54	.0550	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
53	.0595	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
1/16	.0625	5/8	.6250	1-5/8	1.6250	7/8	.8750	1-7/8	1.8750	1-3/4	1.7500	3	3.0000
52	.0635	11/16	.6875	1-11/16	1.6875	7/8	.8750	1-7/8	1.8750	2	2.0000	3-3/4	3.7500
51	.0670	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
50	.0700	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
49	.0730	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
48	.0760	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
5/64	.0781	11/16	.6875	1-11/16	1.6875	1	1.0000	2	2.0000	2	2.0000	3-3/4	3.7500
47	.0785	3/4	.7500	1-3/4	1.7500	1	1.0000	2	2.0000	2-1/4	2.2500	4-1/4	4.2500
46	.0810	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/8	2.1250	2-1/4	2.2500	4-1/4	4.2500
45	.0820	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/8	2.1250	2-1/4	2.2500	4-1/4	4.2500
44	.0860	3/4	.7500	1-3/4	1.7500	1-1/8	1.1250	2-1/8	2.1250	2-1/4	2.2500	4-1/4	4.2500
43	.0890	3/4	.7500	1-3/4	1.7500	1-1/4	1.2500	2-1/4	2.2500	2-1/4	2.2500	4-1/4	4.2500
42	.0935	3/4	.7500	1-3/4	1.7500	1-1/4	1.2500	2-1/4	2.2500	2-1/4	2.2500	4-1/4	4.2500
3/32	.0938	3/4	.7500	1-3/4	1.7500	1-1/4	1.2500	2-1/4	2.2500	2-1/4	2.2500	4-1/4	4.2500
41	.0960	13/16	.8125	1-13/16	1.8125	1-3/8	1.3750	2-3/8	2.3750	2-1/2	2.5000	4-5/8	4.6250
40	.0980	13/16	.8125	1-13/16	1.8125	1-3/8	1.3750	2-3/8	2.3750	2-1/2	2.5000	4-5/8	4.6250
39	.0995	13/16	.8125	1-13/16	1.8125	1-3/8	1.3750	2-3/8	2.3750	2-1/2	2.5000	4-5/8	4.6250
38	.1015	13/16	.8125	1-13/16	1.8125	1-7/16	1.4375	2-1/2	2.5000	2-1/2	2.5000	4-5/8	4.6250
37	.1040	13/16	.8125	1-13/16	1.8125	1-7/16	1.4375	2-1/2	2.5000	2-1/2	2.5000	4-5/8	4.6250
36	.1065	13/16	.8125	1-13/16	1.8125	1-7/16	1.4375	2-1/2	2.5000	2-1/2	2.5000	4-5/8	4.6250
7/64	.1094	13/16	.8125	1-13/16	1.8125	1-1/2	1.5000	2-5/8	2.6250	2-1/2	2.5000	4-5/8	4.6250
35	.1100	7/8	.8750	1-7/8	1.8750	1-1/2	1.5000	2-5/8	2.6250	2-3/4	2.7500	5-1/8	5.1250
34	.1110	7/8	.8750	1-7/8	1.8750	1-1/2	1.5000	2-5/8	2.6250	2-3/4	2.7500	5-1/8	5.1250
33	.1130	7/8	.8750	1-7/8	1.8750	1-1/2	1.5000	2-5/8	2.6250	2-3/4	2.7500	5-1/8	5.1250
32	.1160	7/8	.8750	1-7/8	1.8750	1-5/8	1.6250	2-3/4	2.7500	2-3/4	2.7500	5-1/8	5.1250

continued on next page

Dimensional Specs

Technical Information

Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Inch Drill Sizes (continued)

Drill Sizes	Decimal Equiv.	Screw Machine Length				Jobbers Length				Taper Length			
		flute length		overall length		flute length		overall length		flute length		overall length	
		fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal
1/8	.1250	7/8	.8750	1-7/8	1.8750	1-5/8	1.6250	2-3/4	2.7500	2-3/4	2.7500	5-1/8	5.1250
30	.1285	15/16	.9375	1-15/16	1.9375	1-5/8	1.6250	2-3/4	2.7500	3	3.0000	5-3/8	5.3750
29	.1360	15/16	.9375	1-15/16	1.9375	1-3/4	1.7500	2-7/8	2.8750	3	3.0000	5-3/8	5.3750
28	.1405	15/16	.9375	1-15/16	1.9375	1-3/4	1.7500	2-7/8	2.8750	3	3.0000	5-3/8	5.3750
9/64	.1406	15/16	.9375	1-15/16	1.9375	1-3/4	1.7500	2-7/8	2.8750	3	3.0000	5-3/8	5.3750
27	.1440	1	1.0000	2-1/16	2.0625	1-7/8	1.8750	3	3.0000	3	3.0000	5-3/8	5.3750
26	.1470	1	1.0000	2-1/16	2.0625	1-7/8	1.8750	3	3.0000	3	3.0000	5-3/8	5.3750
25	.1495	1	1.0000	2-1/16	2.0625	1-7/8	1.8750	3	3.0000	3	3.0000	5-3/8	5.3750
24	.1520	1	1.0000	2-1/16	2.0625	2	2.0000	3-1/8	3.1250	3	3.0000	5-3/8	5.3750
23	.1540	1	1.0000	2-1/16	2.0625	2	2.0000	3-1/8	3.1250	3	3.0000	5-3/8	5.3750
5/32	.1562	1	1.0000	2-1/16	2.0625	2	2.0000	3-1/8	3.1250	3	3.0000	5-3/8	5.3750
22	.1570	1-1/16	1.0625	2-1/8	2.1250	2	2.0000	3-1/8	3.1250	3-3/8	3.3750	5-3/4	5.7500
21	.1590	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
20	.1610	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
19	.1660	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
18	.1695	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
11/64	.1719	1-1/16	1.0625	2-1/8	2.1250	2-1/8	2.1250	3-1/4	3.2500	3-3/8	3.3750	5-3/4	5.7500
17	.1730	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
16	.1770	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
15	.1800	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
14	.1820	1-1/8	1.2500	2-3/16	2.1875	2-3/16	2.1875	3-3/8	3.3750	3-3/8	3.3750	5-3/4	5.7500
13	.1850	1-1/8	1.2500	2-3/16	2.1875	2-5/16	2.3125	3-1/2	3.5000	3-3/8	3.3750	5-3/4	5.7500
3/16	.1875	1-1/8	1.2500	2-3/16	2.1875	2-5/16	2.3125	3-1/2	3.5000	3-3/8	3.3750	5-3/4	5.7500
12	.1890	1-3/16	1.1875	2-1/4	2.2500	2-5/16	2.3125	3-1/2	3.5000	3-5/8	3.6250	6	6.0000
11	.1910	1-3/16	1.1875	2-1/4	2.2500	2-5/16	2.3125	3-1/2	3.5000	3-5/8	3.6250	6	6.0000
10	.1935	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
9	.1960	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
8	.1990	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
7	.2010	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
13/64	.2031	1-3/16	1.1875	2-1/4	2.2500	2-7/16	2.4375	3-5/8	3.6250	3-5/8	3.6250	6	6.0000
6	.2040	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
5	.2055	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
4	.2090	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
3	.2130	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
7/32	.2188	1-1/4	1.2500	2-3/8	2.3750	2-1/2	2.5000	3-3/4	3.7500	3-5/8	3.6250	6	6.0000
2	.2210	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
1	.2280	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
A	.2340	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
15/64	.2344	1-5/16	1.3125	2-7/16	2.4375	2-5/8	2.6250	3-7/8	3.8750	3-3/4	3.7500	6-1/8	6.1250
B	.2380	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
C	.2420	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
D	.2460	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
1/4-E	.2500	1-3/8	1.3750	2-1/2	2.5000	2-3/4	2.7500	4	4.0000	3-3/4	3.7500	6-1/8	6.1250
F	.2570	1-7/16	1.4375	2-5/8	2.6250	2-7/8	2.8750	4-1/8	4.1250	3-3/4	3.7500	6-1/8	6.1250
G	.2610	1-7/16	1.4375	2-5/8	2.6250	2-7/8	2.8750	4-1/8	4.1250	3-3/4	3.7500	6-1/8	6.1250
17/64	.2656	1-7/16	1.4375	2-5/8	2.6250	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
H	.2660	1-1/2	1.5000	2-11/16	2.6875	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
I	.2720	1-1/2	1.5000	2-11/16	2.6875	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
J	.2770	1-1/2	1.5000	2-11/16	2.6875	2-7/8	2.8750	4-1/8	4.1250	3-7/8	3.8750	6-1/4	6.2500
9/32	.2812	1-1/2	1.5000	2-11/16	2.6875	2-15/16	2.9375	4-1/4	4.2500	3-7/8	3.8750	6-1/4	6.2500
K	.2812	1-1/2	1.5000	2-11/16	2.6875	2-15/16	2.9375	4-1/4	4.2500	3-7/8	3.8750	6-1/4	6.2500
L	.2900	1-9/16	1.5625	2-3/4	2.7500	2-15/16	2.9375	4-1/4	4.2500	3-7/8	3.8750	6-1/4	6.2500
M	.2950	1-9/16	1.5625	2-3/4	2.7500	3-1/16	3.0625	4-3/8	4.3750	4	4.0000	6-3/8	6.3750
19/64	.2969	1-9/16	1.5625	2-3/4	2.7500	3-1/16	3.0625	4-3/8	4.3750	4	4.0000	6-3/8	6.3750
N	.3020	1-5/8	1.6250	2-13/16	2.8125	3-1/16	3.0625	4-3/8	4.3750	4	4.0000	6-3/8	6.3750
5/16	.3125	1-5/8	1.6250	2-13/16	2.8125	3-3/16	3.1875	4-1/2	4.5000	4	4.0000	6-3/8	6.3750

continued on next page



Technical Information

Dimensional Specs

Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Inch Drill Sizes (continued)

Drill Sizes	Decimal Equiv.	Screw Machine Length				Jobbers Length				Taper Length			
		flute length		overall length		flute length		overall length		flute length		overall length	
		fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal	fraction	decimal
O	.3160	1-11/16	1.6875	2-15/16	2.9375	3-3/16	3.1875	4-1/2	4.5000	4	4.0000	6-3/8	6.3750
P	.3230	1-11/16	1.6875	2-15/16	2.9375	3-5/16	3.1875	4-5/8	4.6250	4	4.0000	6-3/8	6.3750
21/64	.3281	1-11/16	1.6875	2-15/16	2.9375	3-5/16	3.1875	4-5/8	4.6250	4-1/8	4.1250	6-1/2	6.5000
Q	.3320	1-11/16	1.6875	3	3.0000	3-7/16	3.4375	4-3/4	4.7500	4-1/8	4.1250	6-1/2	6.5000
R	.3390	1-11/16	1.6875	3	3.0000	3-7/16	3.4375	4-3/4	4.7500	4-1/8	4.1250	6-1/2	6.5000
11/32	.3438	1-11/16	1.6875	3	3.0000	3-7/16	3.4375	4-3/4	4.7500	4-1/8	4.1250	6-1/2	6.5000
S	.3480	1-3/4	1.7500	3-1/16	3.0625	3-1/2	3.5000	4-7/8	4.8750	4-1/4	4.2500	6-3/4	6.7500
T	.3580	1-3/4	1.7500	3-1/16	3.0625	3-1/2	3.5000	4-7/8	4.8750	4-1/4	4.2500	6-3/4	6.7500
23/64	.3594	1-3/4	1.7500	3-1/16	3.0625	3-1/2	3.5000	4-7/8	4.8750	4-1/4	4.2500	6-3/4	6.7500
U	.3680	1-13/16	1.8125	3-1/8	3.1250	3-5/8	3.6250	5	5.0000	4-1/4	4.2500	6-3/4	6.7500
3/8	.3750	1-13/16	1.8125	3-1/8	3.1250	3-5/8	3.6250	5	5.0000	4-1/4	4.2500	6-3/4	6.7500
V	.3770	1-7/8	1.8750	3-1/4	3.2500	3-5/8	3.6250	5	5.0000	4-1/4	4.2500	6-3/4	6.7500
W	.3860	1-7/8	1.8750	3-1/4	3.2500	3-3/4	3.7500	5-1/8	5.1250	4-1/4	4.2500	6-3/4	6.7500
25/64	.3906	1-7/8	1.8750	3-1/4	3.2500	3-3/4	3.7500	5-1/8	5.1250	4-3/8	4.3750	7	7.0000
X	.3970	1-15/16	1.9375	3-5/16	3.3125	3-3/4	3.7500	5-1/8	5.1250	4-3/8	4.3750	7	7.0000
Y	.4040	1-15/16	1.9375	3-5/16	3.3125	3-7/8	3.8750	5-1/4	5.2500	4-3/8	4.3750	7	7.0000
13/32	.4062	1-15/16	1.9375	3-5/16	3.3125	3-7/8	3.8750	5-1/4	5.2500	4-3/8	4.3750	7	7.0000
Z	.4130	2	2.0000	3-3/8	3.3750	3-7/8	3.8750	5-1/4	5.2500	4-5/8	4.6250	7-1/4	7.2500
27/64	.4219	2	2.0000	3-3/8	3.3750	3-15/16	3.9375	5-3/8	5.3750	4-5/8	4.6250	7-1/4	7.2500
7/16	.4375	2-1/16	2.0625	3-7/16	3.4375	4-1/16	4.0625	5-1/2	5.5000	4-5/8	4.6250	7-1/4	7.2500
29/64	.4531	2-1/8	2.1250	3-9/16	3.5625	4-3/16	4.1875	5-5/8	5.6250	4-3/4	4.7500	7-1/2	7.5000
15/32	.4688	2-1/8	2.1250	3-5/8	3.6250	4-5/16	4.3125	5-3/4	5.7500	4-3/4	4.7500	7-1/2	7.5000
31/64	.4844	2-3/16	2.1875	3-11/16	3.6875	4-3/8	4.3750	5-7/8	5.8750	4-3/4	4.7500	7-3/4	7.7500
1/2	.5000	2-1/4	2.2500	3-3/4	3.7500	4-1/2	4.5000	6	6.0000	4-3/4	4.7500	7-3/4	7.7500
33/64	.5156	2-3/8	2.3750	3-7/8	3.8750	4-13/16	4.8125	6-5/8	6.6250	4-3/4	4.7500	8	8.0000
17/32	.5312	2-3/8	2.3750	3-7/8	3.8750	4-13/16	4.8125	6-5/8	6.6250	4-3/4	4.7500	8	8.0000
35/64	.5469	2-1/2	2.5000	4	4.0000	4-13/16	4.8125	6-5/8	6.6250	4-7/8	4.8750	8-1/4	8.2500
9/16	.5625	2-1/2	2.5000	4	4.0000	4-13/16	4.8125	6-5/8	6.6250	4-7/8	4.8750	8-1/4	8.2500
37/64	.5781	2-5/8	2.6250	4-1/8	4.1250	4-13/16	4.8125	6-5/8	6.6250	4-7/8	4.8750	8-3/4	8.7500
19/32	.5938	2-5/8	2.6250	4-1/8	4.1250	5-3/16	5.1875	7-1/8	7.1250	4-7/8	4.8750	8-3/4	8.7500
39/64	.6094	2-3/4	2.7500	4-1/4	4.2500	5-3/16	5.1875	7-1/8	7.1250	4-7/8	4.8750	8-3/4	8.7500
5/8	.6250	2-3/4	2.7500	4-1/4	4.2500	5-3/16	5.1875	7-1/8	7.1250	4-7/8	4.8750	8-3/4	8.7500
41/64	.6406	2-7/8	2.8750	4-1/2	4.5000	5-3/16	5.1875	7-1/8	7.1250	5-1/8	5.1250	9	9.0000
21/32	.6562	2-7/8	2.8750	4-1/2	4.5000	5-3/16	5.1875	7-1/8	7.1250	5-1/8	5.1250	9	9.0000
43/64	.6719	2-7/8	2.8750	4-5/8	4.6250	5-5/8	5.6250	7-5/8	7.6250	5-3/8	5.3750	9-1/4	9.2500
11/16	.6875	2-7/8	2.8750	4-5/8	4.6250	5-5/8	5.6250	7-5/8	7.6250	5-3/8	5.3750	9-1/4	9.2500
45/64	.7031	3	3.0000	4-3/4	4.7500	—	—	—	—	5-5/8	5.6250	9-1/2	9.5000
23/32	.7188	3	3.0000	4-3/4	4.7500	—	—	—	—	5-5/8	5.6250	9-1/2	9.5000
47/64	.7344	3-1/8	3.1250	5	5.0000	—	—	—	—	5-7/8	5.8750	9-3/4	9.7500
3/4	.7500	3-1/8	3.1250	5	5.0000	—	—	—	—	5-7/8	5.8750	9-3/4	9.7500
49/64	.7656	3-1/4	3.2500	5-1/8	5.1250	—	—	—	—	6	6.0000	9-7/8	9.8750
25/32	.7812	3-1/4	3.2500	5-1/8	5.1250	—	—	—	—	6	6.0000	9-7/8	9.8750
51/64	.7969	3-3/8	3.3750	5-1/4	5.2500	—	—	—	—	6-1/8	6.1250	10	10.0000
13/16	.8125	3-3/8	3.3750	5-1/4	5.2500	—	—	—	—	6-1/8	6.1250	10	10.0000
53/64	.8281	3-1/2	3.5000	5-3/8	5.3750	—	—	—	—	6-1/8	6.1250	10	10.0000
27/32	.8438	3-1/2	3.5000	5-3/8	5.3750	—	—	—	—	6-1/8	6.1250	10	10.0000
55/64	.8594	3-1/2	3.5000	5-1/2	5.5000	—	—	—	—	6-1/8	6.1250	10	10.0000
7/8	.8750	3-1/2	3.5000	5-1/2	5.5000	—	—	—	—	6-1/8	6.1250	10	10.0000
57/64	.8906	3-5/8	3.6250	5-5/8	5.6250	—	—	—	—	6-1/8	6.1250	10	10.0000
29/32	.9062	3-5/8	3.6250	5-5/8	5.6250	—	—	—	—	6-1/8	6.1250	10	10.0000
59/64	.9219	3-3/4	3.7500	5-3/4	5.7500	—	—	—	—	6-1/8	6.1250	10-3/4	10.7500
15/16	.9375	3-3/4	3.7500	5-3/4	5.7500	—	—	—	—	6-1/8	6.1250	10-3/4	10.7500
61/64	.9531	3-7/8	3.8750	5-7/8	5.8750	—	—	—	—	6-3/8	6.3750	11	11.0000
31/32	.9688	3-7/8	3.8750	5-7/8	5.8750	—	—	—	—	6-3/8	6.3750	11	11.0000
63/64	.9844	4	4.0000	6	6.0000	—	—	—	—	6-3/8	6.3750	11	11.0000
1	1.0000	4	4.0000	6	6.0000	—	—	—	—	6-3/8	6.3750	11	11.0000

Dimensional Specs

Technical Information

Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Metric Drill Sizes

Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length	overall length	flute length	overall length	flute length	overall length
		mm	mm	mm	mm	mm	mm
0.2	.0079	1.5	19	2.5	19	—	—
0.22	.0087	1.5	19	2.5	19	—	—
0.25	.0098	1.5	19	3	19	—	—
0.28	.0110	1.5	19	3	19	—	—
0.3	.0118	1.5	19	3	19	—	—
0.32	.0126	2	19	4	19	—	—
0.35	.0138	2	19	4	19	—	—
0.38	.0150	2	19	4	19	—	—
0.4	.0157	2.5	19	5	20	—	—
0.42	.0165	2.5	19	5	20	—	—
0.45	.0177	2.5	19	5	20	—	—
0.48	.0189	2.5	19	5	20	—	—
0.5	.0197	3	20	6	22	—	—
0.52	.0205	3	20	6	22	—	—
0.55	.0217	3.5	21	7	24	—	—
0.58	.0228	3.5	21	7	24	—	—
0.6	.0236	3.5	21	7	24	—	—
0.62	.0244	4	22	8	26	—	—
0.65	.0256	4	22	8	26	—	—
0.68	.0268	4.5	23	9	28	—	—
0.7	.0276	4.5	23	9	28	—	—
0.72	.0283	4.5	23	9	28	—	—
0.75	.0295	4.5	23	9	28	—	—
0.78	.0307	5	24	10	30	—	—
0.8	.0315	5	24	10	30	—	—
0.82	.0322	5	24	10	30	—	—
0.85	.0335	5	24	10	30	—	—
0.88	.0346	5.5	25	11	32	—	—
0.9	.0354	5.5	25	11	32	—	—
0.92	.0362	5.5	25	11	32	—	—
0.95	.0374	5.5	25	11	32	—	—
0.98	.0385	6	26	12	34	—	—
1.0	.0394	6	26	12	34	33	56
1.05	.0413	6	26	12	34	—	—
1.1	.0433	7	28	14	36	37	60
1.15	.0453	7	28	14	36	—	—
1.2	.0472	8	30	16	38	41	65
1.25	.0492	8	30	16	38	—	—
1.3	.0512	8	30	16	38	41	65
1.35	.0531	9	32	18	40	—	—
1.4	.0551	9	32	18	40	45	70
1.45	.0571	9	32	18	40	—	—
1.5	.0591	9	32	18	40	45	70
1.55	.0610	10	34	20	43	—	—
1.6	.0630	10	34	20	43	50	76
1.65	.0650	10	34	20	43	—	—
1.7	.0669	10	34	20	43	50	76
1.75	.0689	11	36	22	46	—	—
1.8	.0709	11	36	22	46	53	80
1.85	.0728	11	36	22	46	—	—
1.9	.0748	11	36	22	46	53	80
1.95	.0767	12	38	24	49	—	—
2.0	.0787	12	38	24	49	56	85
2.05	.0807	12	38	24	49	—	—
2.1	.0827	12	38	24	49	56	85
2.15	.0846	13	40	27	53	—	—

continued on next page

Technical Information
Dimensional Specs
Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Metric Drill Sizes (continued)

Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length	overall length	flute length	overall length	flute length	overall length
		mm	mm	mm	mm	mm	mm
2.2	.0866	13	40	27	53	59	90
2.25	.0886	13	40	27	53	—	—
2.3	.0906	13	40	27	53	59	90
2.35	.0925	13	40	27	53	—	—
2.4	.0945	14	43	30	57	62	95
2.45	.0964	14	43	30	57	—	—
2.5	.0984	14	43	30	57	62	95
2.55	.1003	14	43	30	57	—	—
2.6	.1024	14	43	30	57	62	95
2.65	.1043	14	43	30	57	—	—
2.7	.1062	16	46	33	61	66	100
2.75	.1082	16	46	33	61	—	—
2.8	.1102	16	46	33	61	66	100
2.85	.1122	16	46	33	61	—	—
2.9	.1142	16	46	33	61	66	100
2.95	.1161	16	46	33	61	—	—
3.0	.1181	16	46	33	61	66	100
3.1	.1220	18	49	36	65	69	106
3.2	.1260	18	49	36	65	69	106
3.3	.1299	18	49	36	65	69	106
3.4	.1339	20	52	39	70	73	112
3.5	.1378	20	52	39	70	73	112
3.6	.1417	20	52	39	70	73	112
3.7	.1457	20	52	39	70	73	112
3.8	.1496	22	55	43	75	78	119
3.9	.1535	22	55	43	75	78	119
4.0	.1575	22	55	43	75	78	119
4.1	.1614	22	55	43	75	78	119
4.2	.1654	22	55	43	75	78	119
4.3	.1692	24	58	47	80	82	126
4.4	.1732	24	58	47	80	82	126
4.5	.1772	24	58	47	80	82	126
4.6	.1811	24	58	47	80	82	126
4.7	.1850	24	58	47	80	82	126
4.8	.1890	26	62	52	86	87	132
5.0	.1969	26	62	52	86	87	132
5.1	.2008	26	62	52	86	87	132
5.2	.2047	26	62	52	86	87	132
5.3	.2086	26	62	52	86	87	132
5.4	.2125	28	66	57	93	91	139
5.5	.2165	28	66	57	93	91	139
5.6	.2205	28	66	57	93	91	139
5.7	.2244	28	66	57	93	91	139
5.8	.2283	28	66	57	93	91	139
5.9	.2322	28	66	57	93	91	139
6.0	.2362	28	66	57	93	91	139
6.1	.2401	31	70	63	101	97	148
6.2	.2440	31	70	63	101	97	148
6.3	.2480	31	70	63	101	97	148
6.4	.2520	31	70	63	101	97	148
6.5	.2559	31	70	63	101	97	148
6.6	.2598	31	70	63	101	97	148
6.7	.2638	31	70	63	101	97	148
6.8	.2677	34	74	69	109	102	156
6.9	.2717	34	74	69	109	102	156
7.0	.2756	34	74	69	109	102	156

continued on next page

Dimensional Specs

Technical Information

Conversion formulas:

Inch = mm x .03937

Metric = inch x 25.4

Metric Drill Sizes (continued)

Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length	overall length	flute length	overall length	flute length	overall length
		mm	mm	mm	mm	mm	mm
7.1	.2795	34	74	69	109	102	156
7.2	.2835	34	74	69	109	102	156
7.3	.2874	34	74	69	109	102	156
7.4	.2913	34	74	69	109	102	156
7.5	.2953	34	74	69	109	102	156
7.6	.2992	37	79	75	117	109	165
7.7	.3031	37	79	75	117	109	165
7.8	.3070	37	79	75	117	109	165
7.9	.3110	37	79	75	117	109	165
8.0	.3150	37	79	75	117	109	165
8.1	.3189	37	79	75	117	109	165
8.2	.3228	37	79	75	117	109	165
8.3	.3267	37	79	75	117	109	165
8.4	.3307	37	79	75	117	109	165
8.5	.3346	37	79	75	117	109	165
8.6	.3386	40	84	81	125	115	175
8.7	.3425	40	84	81	125	115	175
8.8	.3464	40	84	81	125	115	175
8.9	.3503	40	84	81	125	115	175
9.0	.3543	40	84	81	125	115	175
9.1	.3582	40	84	81	125	115	175
9.2	.3622	40	84	81	125	115	175
9.3	.3661	40	84	81	125	115	175
9.4	.3700	40	84	81	125	115	175
9.5	.3740	40	84	81	125	115	175
9.6	.3779	43	89	87	133	121	184
9.7	.3817	43	89	87	133	121	184
9.8	.3858	43	89	87	133	121	184
9.9	.3897	43	89	87	133	121	184
10.0	.3937	43	89	87	133	121	184
10.1	.3976	43	89	87	133	121	184
10.2	.4016	43	89	87	133	121	184
10.3	.4055	43	89	87	133	121	184
10.4	.4094	43	89	87	133	121	184
10.5	.4134	43	89	87	133	121	184
10.6	.4173	43	89	87	133	121	184
10.7	.4212	47	95	94	142	128	195
10.8	.4252	47	95	94	142	128	195
10.9	.4291	47	95	94	142	128	195
11.0	.4331	47	95	94	142	128	195
11.1	.4370	47	95	94	142	128	195
11.2	.4409	47	95	94	142	128	195
11.3	.4448	47	95	94	142	128	195
11.4	.4488	47	95	94	142	128	195
11.5	.4527	47	95	94	142	128	195
11.6	.4566	47	95	94	142	128	195
11.7	.4606	47	95	94	142	128	195
11.8	.4645	47	95	94	142	128	195
11.9	.4685	51	102	101	151	134	205
12.0	.4724	51	102	101	151	134	205
12.1	.4763	51	102	101	151	134	205
12.2	.4823	51	102	101	151	134	205
12.3	.4842	51	102	101	151	134	205
12.4	.4881	51	102	101	151	134	205
12.5	.4921	51	102	101	151	134	205
12.6	.4960	51	102	101	151	134	205

continued on next page


Technical Information
Dimensional Specs
Conversion formulas:

Inch = mm x .03937


Metric = inch x 25.4

Metric Drill Sizes (continued)

Drill Size (mm)	Decimal Equivalent (in)	Screw Machine Length DIN 1897		Jobbers Length DIN 338		Taper Length DIN 340	
		flute length mm	overall length mm	flute length mm	overall length mm	flute length mm	overall length mm
12.7	.5000	51	102	101	151	134	205
12.8	.5039	51	102	101	151	134	205
12.9	.5078	51	102	101	151	134	205
13.0	.5118	51	102	101	151	134	205
13.1	.5157	51	102	101	151	134	205
13.2	.5197	51	102	101	151	134	205
13.3	.5236	54	107	108	160	140	214
13.4	.5118	54	107	108	160	140	214
13.5	.5315	54	107	108	160	140	214
13.6	.5354	54	107	108	160	140	214
13.7	.5394	54	107	108	160	140	214
13.8	.5433	54	107	108	160	140	214
13.9	.5472	54	107	108	160	140	214
14.0	.5512	54	107	108	160	140	214
14.25	.5610	56	111	114	169	144	220
14.5	.5709	56	111	114	169	144	220
14.75	.5807	56	111	114	169	144	220
15.0	.5906	56	111	114	169	144	220
15.25	.6004	58	115	120	178	149	227
15.5	.6102	58	115	120	178	149	227
15.75	.6201	58	115	120	178	149	227
16.0	.6299	58	115	120	178	149	227

Shank / Tang


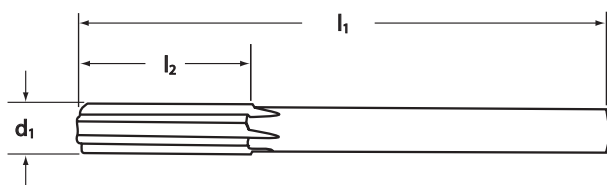
Shank Diameter (inches)		Tang Dimensions (inches)	
from	to	A width	B length
1/8	3/16	.092	9/32
over 3/16	1/4	.120	5/16
over 1/4	5/16	.160	11/32
over 5/16	3/8	.201	3/8
over 3/8	15/32	.241	7/16
over 15/32	9/16	.300	1/2
over 9/16	21/32	.370	9/16
over 21/32	3/4	.440	5/8
over 3/4	7/8	.511	11/16
over 7/8	1	.605	3/4
over 1-3/16	1-3/8	.813	7/8

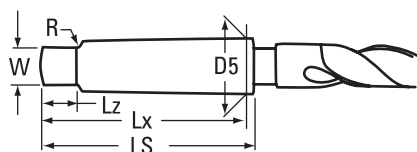Morse Taper Shank


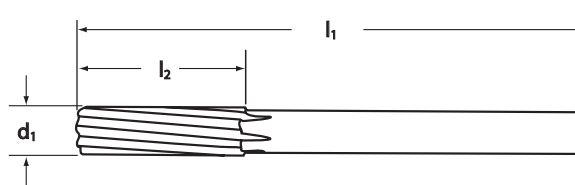
morse taper shank number	taper per foot	taper per inch	D5 maximum shank dia.	LS length of shank	Lx length of shank to gage line	Lz length of tang	W thickness of tang	R radius
1	.5985	.0498	.475	2.56	2.44	.37	.20	.19
2	.5994	.0499	.700	3.12	2.94	.44	.25	.25
3	.6023	.0501	.938	3.87	3.69	.56	.31	.28
4	.6232	.0519	1.231	4.87	4.62	.62	.47	.31
5	.6315	.0526	1.749	6.12	5.87	.75	.62	.37
6	.6256	.0521	2.494	8.56	8.25	1.12	.75	.50

Straight Shank Chucking Reamer Dimensions

Straight Flute




Spiral Flute



decimal size range		reamer dia d ₁ (in)		overall length l ₁ (in)	flute length l ₂ (in)	no. of flutes
min	max	max	min			
.0394	.0460	.0390	.0380	2.500	.500	4
.0461	.0515	.0455	.0445	2.500	.500	4
.0516	.0590	.0510	.0500	2.500	.500	4
.0591	.0635	.0585	.0575	2.500	.500	4
.0636	.0665	.0585	.0575	3.000	.750	4
.0666	.0755	.0660	.0650	3.000	.750	4
.0756	.0805	.0720	.0710	3.000	.750	4
.0806	.0855	.0771	.0761	3.000	.750	4
.0856	.0930	.0810	.0800	3.000	.750	4
.0931	.0938	.0880	.0870	3.000	.750	4
.0939	.0955	.0880	.0870	3.500	.875	4
.0956	.1005	.0928	.0918	3.500	.875	4
.1006	.1060	.0950	.0940	3.500	.875	4
.1061	.1105	.1030	.1020	3.500	.875	4
.1106	.1155	.1055	.1045	3.500	.875	4
.1156	.1160	.1120	.1110	3.500	.875	4
.1161	.1225	.1120	.1110	3.500	.875	6
.1226	.1285	.1190	.1180	3.500	.875	6
.1286	.1355	.1190	.1180	4.000	1.000	6
.1356	.1400	.1275	.1265	4.000	1.000	6
.1401	.1465	.1350	.1340	4.000	1.000	6
.1466	.1515	.1430	.1420	4.000	1.000	6
.1516	.1560	.1460	.1450	4.000	1.000	6
.1561	.1570	.1510	.1500	4.000	1.000	6
.1571	.1585	.1510	.1500	4.500	1.125	6
.1586	.1655	.1530	.1520	4.500	1.125	6
.1656	.1715	.1595	.1585	4.500	1.125	6
.1716	.1765	.1645	.1635	4.500	1.125	6
.1766	.1795	.1704	.1694	4.500	1.125	6
.1796	.1845	.1755	.1745	4.500	1.125	6

decimal size range		reamer dia d ₁ (in)		overall length l ₁ (in)	flute length l ₂ (in)	no. of flutes
min	max	max	min			
.1846	.1890	.1805	.1795	4.500	1.125	6
.1891	.1905	.1805	.1795	5.000	1.250	6
.1906	.1955	.1860	.1850	5.000	1.250	6
.1956	.2005	.1895	.1885	5.000	1.250	6
.2006	.2050	.1945	.1935	5.000	1.250	6
.2051	.2125	.2016	.2006	5.000	1.250	6
.2126	.2188	.2075	.2065	5.000	1.250	6
.2189	.2205	.2075	.2065	6.000	1.500	6
.2206	.2335	.2173	.2163	6.000	1.500	6
.2336	.2375	.2265	.2255	6.000	1.500	6
.2376	.2475	.2329	.2319	6.000	1.500	6
.2476	.2530	.2405	.2395	6.000	1.500	6
.2531	.2840	.2485	.2475	6.000	1.500	6
.2841	.3438	.2792	.2782	6.000	1.500	6
.3439	.4062	.3105	.3095	7.000	1.750	6
.4063	.4688	.3730	.3720	7.000	1.750	6
.4689	.5010	.4355	.4345	8.000	2.000	6
.5011	.6000	.4355	.4345	8.000	2.000	8
.6001	.7230	.5620	.5605	9.000	2.250	8
.7231	.8490	.6245	.6230	9.500	2.500	8
.8491	.9740	.7495	.7480	10.000	2.625	8
.9741	1.0000	.8745	.8730	10.500	2.750	8
1.0001	1.0625	.8745	.8730	10.500	2.750	10
1.0626	1.1250	.8745	.8730	11.000	2.875	10
1.1251	1.1875	.9995	.9980	11.000	2.875	10
1.1876	1.3125	.9995	.9980	11.500	3.000	10
1.3126	1.3750	.9995	.9980	12.000	3.250	10
1.3751	1.4375	1.2495	1.2480	12.000	3.250	10
1.4376	1.5000	1.2495	1.2480	12.500	3.500	12

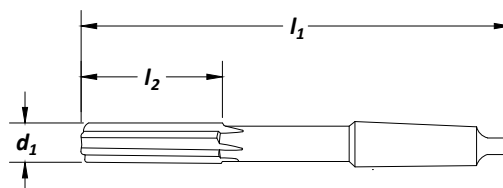Taper Shank Chucking Reamers - Straight Flute


diameter size range d ₁ (in)		overall length l ₁ (in)	flute length l ₂ (in)	morse taper shank number	no. of flutes
min	max				
.1750	.1890	4.500	1.125	1	6
.1891	.2041	5.000	1.250	1	6
.2042	.2188	5.000	1.250	1	6
.2189	.2630	6.000	1.500	1	6
.2531	.2840	6.000	1.500	1	6
.2841	.3135	6.000	1.500	1	6
.3136	.3438	6.000	1.500	1	6
.3439	.3770	7.000	1.750	1	6
.3771	.4062	7.000	1.750	1	6
.4063	.4385	7.000	1.750	1	6
.4386	.4688	7.000	1.750	1	6
.4689	.5010	8.000	2.000	1	6
.5011	.5330	8.000	2.000	1	8
.5331	.5635	8.000	2.000	1	8
.5636	.5938	8.000	2.000	1	8
.5939	.6260	9.000	2.250	2	8
.6261	.6719	9.000	2.250	2	8
.6720	.7230	9.000	2.250	2	8
.7231	.7656	9.500	2.500	2	8
.7657	.8125	9.500	2.500	2	8
.8126	.8490	9.500	2.500	2	8
.8491	.9062	1.000	2.625	2	8
.9063	.9740	1.000	2.625	3	8
.9741	1.0000	1.500	2.750	3	8
1.0001	1.0625	1.500	2.750	3	10
1.0626	1.1250	11.000	2.875	3	10
1.1251	1.1875	11.000	2.875	3	10
1.1876	1.2500	11.500	3.000	4	10
1.2501	1.3125	11.500	3.000	4	10
1.3126	1.3750	12.000	3.250	4	10
1.3751	1.4375	12.000	3.250	4	10
1.4376	1.5000	12.500	3.500	4	12

Reaming Speeds

Speeds for machine reaming may vary considerably depending in part on the material to be reamed, type of machine, and required finish and accuracy. In general most machine reaming is done at about 2/3 the speed used for drilling the same material. Speeds for reaming are shown on pages 128-129.

Reaming Feeds

Feeds for reaming are usually much higher than those used for drilling, often running 200% to 300% of drill feeds. Too low a feed may result in excessive reamer wear. At all times it is necessary that the feed be high enough to permit the reamer to cut rather than to rub or burnish. Too high a feed may tend to reduce the accuracy of the hole and may also lower the quality of the finish. The basic idea is to use as high a feed as possible and still produce the required finish and accuracy.


Stock to be Removed

For the same reason, insufficient stock for reaming may result in a burnishing rather than a cutting action. It is difficult to generalize on this phase as it is tied in closely with type of material, feed, finish required, depth of hole, and chip capacity of the reamer. For machine reaming, 0.010" on a 1/4" hole, 0.015" on a 1/2" hole, up to 0.025" on a 1-1/2" hole, seems a good starting point. For hand reaming, stock allowances are much smaller, partly because of the difficulty in forcing the reamer through greater stock. A common allowance is 0.001" to 0.003".

American National Standard Reamer Taper (Morse Taper) Dimensions

Taper No.	Depth of Hole	
	A <i>Drilled</i>	B <i>Reamed</i>
0*	2-1/16	2-1/32
1	2-3/16	2-5/32
2	3-1/8	2-15/16
3	3-7/8	3-11/16
4	4-7/8	4-5/8
4-1/2	5-1/8	4-5/8
5	6-1/8	5-7/8
6	8-9/16	8-1/4
7	11-5/8	11-1/4

*Size 0 taper shank not listed in American National Standards.

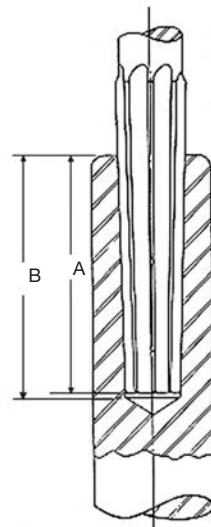

Alignment

In the ideal reaming job, the spindle, reamer, bushing, and hole to be machined are all in perfect alignment. Any variation from this tends to increase reamer wear and detracts from the accuracy of the hole. Tapered, oversize, or bell-mouthed holes should call for a check of alignment. Sometimes the bad effects of misalignment can be reduced through the use of floating or adjustable holders. Quite often if the user will grind a slight back taper on the reamer it will also be of help in overcoming the effects of misalignment.

Chatter

The presence of chatter while reaming has a very bad effect on reamer life and on the finish in the hole. Chatter may be the result of one of several causes, some of which are listed:

- Excessive speed.
- Too much clearance on reamer.
- Lack of rigidity in jig or machine.
- Insecure holding of work.
- Excessive overhang of reamer or spindle.
- Excessive looseness in floating holder.
- Too light a feed.


Correcting the cause can materially increase both reamer life and the quality of the reamed holes.

Coolant

In reaming, the emphasis is usually on finish, and a coolant is normally chosen for this purpose rather than for cooling. Quite often this means a change from that recommended for drilling as shown on page 2, but in general this list will be found satisfactory.

Reamer Stock Removal

Stock removal is dependent on material, feed, and finish required. The stock removal chart below illustrates starting points for various diameters when using machine and chucking reamers.

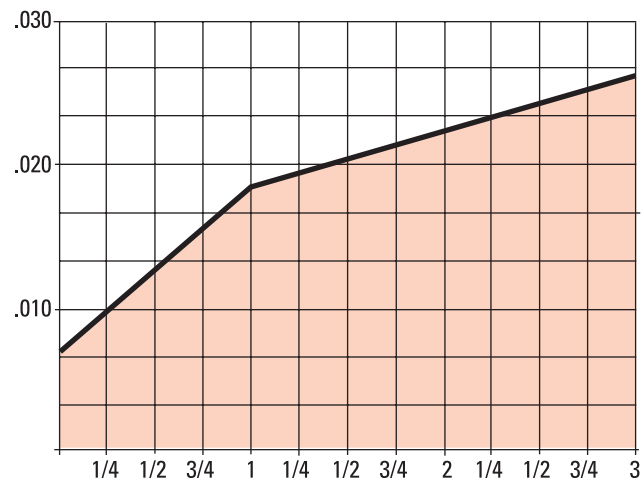

Reamer Diameter Tolerances

Reamer Diameter inches	+	+
	inches	inches
through 1/2	.0001	.0004
over 1/2 through 1	.0001	.0005
over 1	.0002	.0006
	+	-
dowel pin sizes	.0000	(.0002)

Reamer Overall Length and Flute Length Tolerances

Reamer Diameter inches	+	-
	inches	inches
3/64 through 1	.0625	.0625
over 1 through 2	.0938	.0938
over 2 through 3	.1250	.1250

Reamer Lip Height Tolerances

Reamer Diameter inches	Total Indicator Variation inches
through 1/8	.0010
1/8 through 1/4	.0012
over 1/4 through 1/2	.0015
over 1/2 through 1	.0020
over 1 through 3-1/2	.0025

Reamer Straight Shank Diameter Tolerances

Reamer Diameter	+	-
	inches	inches
Tool Style 4001, 4030		
.0390 to .4335	.0000	.0010
.4396 to 1.2495	.0000	.0015
Tool Style 657, 659		
.0781 to .6250	.0010	.0050
Tool Style 650		
.0781 to .6250	.0005	.0020

Reamer Regrinding

In obtaining maximum economy from reamers the same principles apply as in the case of most other cutting tools. One of these principles is not to allow a tool to become too dull. It is best to regrind the chamfer on a reamer long before it exhibits excessive wear or refuses to cut. This sharpening is usually restricted to the entering taper or chamfer. It can be done on almost any tool and cutter grinder. Care must be taken so that each flute is ground exactly even or the tool is apt to cut oversize.

Sharpening the chamfer on a reamer by hand is not recommended as it is practically impossible to keep the cutting edges even.

The following figures show three common types of grinds used on reamers:

In grinding down a reamer to special size it is usually necessary to relieve or clear the lands. No hard or fast rule may be given as to the amount of this clearance but the following table may be of help:

Size of Reamer	Circular Land Width	Primary Clearance
1/4"	.007	14°
1/2"	.009	11°
1"	.013	9°
1-1/2"	.016	7°
2"	.023	7°

Figure A

Ordinary reamer grind for most jobs.




Figure B

Hand reamer grind also used on some machine reamer applications to obtain required finish or tolerance.




Figure C

Semi-finish reamer grind to straighten out bent or misaligned holes. Corners must be kept sharp.





Figure D

A secondary clearance is often ground on reamers as shown in Fig. D. This clearance is only to insure the back of the land being well away from the wall of the reamed hole in order to prevent rubbing.



Fractional Sizes

Drill Size Fraction / Dec		Feet per Minute														
		10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
		Revolutions Per Minute														
1/16	.0625	403	807	1210	1614	2017	2420	2823	3227	3663	4033	4437	4840	5244	5647	6050
1/8	.1250	202	403	605	807	1008	1210	1412	1614	1815	2017	2218	2420	2622	2823	3025
3/16	.1875	135	269	403	538	673	807	941	1076	1210	1344	1479	1614	1748	1882	2017
1/4	.2500	101	202	302	403	504	605	706	807	908	1008	1109	1210	1311	1412	1513
5/16	.3125	81	161	242	323	403	484	565	645	726	807	888	968	1049	1129	1210
3/8	.3750	67	135	202	269	336	403	471	538	605	673	739	807	874	941	1008
7/16	.4375	57	116	173	230	288	346	403	461	519	576	634	692	749	807	865
1/2	.5000	50	101	151	202	252	302	353	403	454	504	554	605	655	706	756
5/8	.6250	40	81	121	161	202	242	282	323	363	403	444	484	524	565	605
3/4	.7500	34	67	101	134	168	202	236	269	302	336	370	403	437	471	504
7/8	.8750	29	57	86	116	144	173	202	230	259	288	317	346	375	403	432
1	1.0000	25	50	76	101	126	151	176	202	227	252	277	302	328	353	378
1-1/8	1.1250	22	45	67	90	112	135	157	180	202	224	246	269	291	314	336
1-1/4	1.2500	20	40	61	81	101	121	141	161	182	202	222	242	262	282	302
1-3/8	1.3750	18	37	55	73	92	110	128	147	165	183	202	220	238	257	275
1-1/2	1.5000	17	34	50	67	84	101	117	135	151	168	185	202	218	236	252
1-5/8	1.6250	16	31	46	62	77	93	109	124	140	155	171	186	202	217	233
1-3/4	1.7500	15	29	43	57	72	86	101	116	129	144	158	173	187	202	216
1-7/8	1.8750	13	27	40	53	67	81	94	108	121	135	148	161	175	188	202
2	2.0000	13	25	38	50	63	76	88	101	114	126	139	151	164	176	189
2-1/4	2.2500	11	22	34	45	56	67	79	90	101	112	123	135	146	157	168
2-1/2	2.5000	10	20	30	40	50	61	71	81	90	101	111	121	131	141	151
2-3/4	2.7500	9	18	28	37	46	55	64	73	83	92	101	110	119	128	137
3	3.0000	9	17	25	34	42	50	59	67	76	84	92	101	110	117	126

Letter Sizes

Drill Size Letter / Dec		Feet per Minute														
		10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
		Revolutions Per Minute														
A	.2340	108	215	324	432	540	648	756	864	972	1080	1185	1293	1401	1508	1616
B	.2380	106	212	318	424	530	636	742	847	954	1059	1165	1271	1377	1483	1589
C	.2420	104	209	312	416	521	625	729	833	937	1041	1146	1250	1354	1459	1563
D	.2460	102	205	308	411	513	616	719	822	924	1027	1127	1230	1332	1435	1537
E	.2500	101	202	302	403	504	605	706	807	908	1008	1109	1210	1299	1412	1513
F	.2570	98	196	294	392	490	589	686	785	882	981	1079	1177	1275	1373	1471
G	.2610	96	193	290	386	483	579	676	772	869	966	1063	1159	1256	1352	1449
H	.2660	95	189	284	379	474	569	663	758	853	948	1043	1137	1232	1327	1422
I	.2720	92	185	278	371	463	556	649	741	834	927	1020	1112	1205	1298	1390
J	.2770	91	182	273	364	455	546	637	728	819	910	1001	1092	1183	1274	1365
K	.2810	90	180	269	359	449	538	628	717	807	897	987	1076	1166	1256	1346
L	.2900	87	174	261	348	435	521	609	696	782	869	956	1043	1130	1217	1304
M	.2950	85	171	257	342	428	513	599	684	770	855	940	1026	1111	1197	1282
N	.3020	83	167	251	334	418	501	585	668	752	835	918	1002	1085	1169	1252
O	.3160	80	160	240	319	399	479	558	638	718	798	878	957	1037	1117	1197
P	.3230	78	156	234	312	391	469	546	624	703	781	859	937	1014	1094	1171
Q	.3320	76	152	228	304	380	455	531	607	683	759	836	913	987	1063	1139
R	.3390	75	149	223	298	372	446	521	595	669	744	818	894	967	1041	1115
S	.3480	73	145	217	290	362	435	508	579	652	725	797	869	942	1014	1086
T	.3580	71	141	211	281	352	422	492	563	633	704	774	845	915	986	1056
U	.3680	69	137	205	274	343	411	480	548	616	685	754	822	890	959	1028
V	.3770	67	134	201	267	335	401	468	535	602	669	735	805	869	936	1003
W	.3860	65	131	196	261	327	392	457	523	588	653	718	784	849	914	979
X	.3970	63	127	191	254	317	380	444	508	571	635	698	762	826	889	952
Y	.4040	63	125	187	249	312	374	437	499	562	624	686	749	811	874	936
Z	.4130	61	122	183	244	305	366	427	488	549	611	671	733	793	855	915

Wire Gauge Sizes

Drill Size Wire / Dec	Feet per Minute														
	10'	20'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
	Revolutions Per Minute														
1 .2280	111	221	332	442	553	663	774	884	995	1106	1216	1327	1438	1548	1659
2 .2210	114	228	342	456	570	684	799	912	1026	1140	1255	1369	1483	1597	1711
3 .2130	118	237	355	473	592	710	828	946	1065	1183	1303	1420	1538	1657	1775
4 .2090	121	241	362	482	603	724	845	965	1086	1206	1327	1447	1568	1690	1809
5 .2055	123	246	368	491	614	736	859	981	1104	1227	1350	1472	1595	1717	1840
6 .2040	123	247	371	494	618	741	865	989	1112	1236	1360	1483	1606	1730	1854
7 .2010	125	251	376	502	627	752	878	1003	1129	1254	1379	1505	1630	1756	1881
8 .1990	127	253	380	507	634	760	886	1013	1140	1267	1393	1520	1647	1773	1900
9 .1960	129	257	386	515	644	772	900	1029	1158	1286	1415	1544	1672	1800	1929
10 .1935	130	261	391	521	651	781	912	1042	1173	1303	1433	1564	1694	1824	1954
11 .1910	132	264	396	528	660	792	924	1056	1188	1320	1452	1584	1716	1848	1981
12 .1890	133	267	400	533	667	801	934	1067	1201	1334	1467	1601	1734	1867	2001
13 .1850	136	273	409	545	681	818	957	1090	1227	1363	1499	1636	1771	1908	2044
14 .1820	139	277	416	554	693	831	970	1108	1247	1385	1524	1662	1800	1939	2078
15 .1800	141	281	421	562	702	842	983	1123	1263	1404	1540	1680	1821	1961	2101
16 .1770	143	285	427	570	712	855	997	1139	1282	1424	1567	1709	1852	1994	2136
17 .1730	146	292	437	583	729	875	1020	1166	1311	1457	1603	1749	1894	2040	2187
18 .1695	149	298	447	597	746	895	1044	1193	1342	1492	1636	1785	1934	2082	2231
19 .1660	152	304	455	607	760	911	1063	1215	1367	1519	1670	1822	1974	2127	2279
20 .1610	156	314	470	626	783	939	1096	1253	1409	1566	1723	1879	2035	2193	2349
21 .1590	158	317	476	634	793	951	1109	1269	1427	1585	1745	1903	2061	2220	2379
22 .1570	160	321	482	642	803	964	1124	1284	1445	1606	1766	1927	2088	2248	2408
23 .1540	164	327	491	655	818	982	1146	1309	1473	1637	1800	1964	2128	2292	2455
24 .1520	166	332	498	663	830	995	1161	1327	1493	1659	1824	1991	2156	2322	2488
25 .1495	169	337	506	675	842	1012	1181	1349	1518	1686	1855	2024	2193	2361	2529
26 .1470	172	343	514	686	857	1029	1201	1371	1543	1715	1886	2058	2229	2401	2573
27 .1440	175	350	525	700	876	1051	1226	1401	1576	1751	1927	2101	2276	2451	2626
28 .1405	180	359	539	718	898	1076	1256	1436	1615	1795	1973	2153	2332	2512	2691
29 .1360	185	371	556	742	927	1112	1298	1483	1668	1854	2039	22243	2410	2595	2781
30 .1285	196	393	589	785	981	1177	1373	1569	1766	1962	2158	2354	2550	2747	2943
31 .1200	210	420	630	840	1051	1261	1470	1680	1891	2101	2311	2522	2731	2941	3152
32 .1160	217	435	652	869	1087	1304	1521	1738	1956	2173	2391	2608	2825	3043	3260
33 .1130	223	446	669	892	1115	1338	1562	1785	2008	2231	2454	2677	2900	3123	3346
34 .1110	227	454	681	908	1136	1363	1590	1817	2044	2272	2498	2725	2953	3180	3407
35 .1100	229	458	688	917	1146	1375	1604	1833	2063	2292	2522	2750	2979	3208	3438
36 .1065	237	473	710	947	1184	1420	1657	1894	2130	2367	2604	2841	3078	3314	3551
37 .1040	242	485	727	970	1212	1455	1697	1939	2182	2424	2666	2909	3152	3394	3636
38 .1015	248	497	745	993	1242	1490	1738	1987	2235	2484	2732	2981	3229	3478	3726
39 .0995	253	507	760	1014	1267	1520	1773	2027	2280	2534	2787	3041	3294	3547	3800
40 .0980	257	515	772	1029	1286	1544	1801	2058	2315	2573	2829	3087	3344	3602	3858
41 .0960	263	525	788	1051	1313	1575	1838	2101	2363	2626	2889	3152	3414	3676	3939
42 .0935	269	539	809	1078	1348	1618	1888	2157	2427	2696	2966	3235	3505	3775	4044
43 .0890	283	566	850	1133	1416	1700	1983	2266	2550	2833	3116	3399	3682	3965	4249
44 .0860	293	586	880	1173	1466	1759	2052	2346	2639	2932	3225	3518	3811	4104	4397
45 .0820	308	615	922	1230	1537	1845	2152	2459	2767	3074	3382	3689	3997	4305	4611
46 .0810	312	622	934	1245	1556	1868	2179	2490	2801	3113	3423	3735	4046	4357	4669
47 .0785	321	642	964	1284	1606	1927	2248	2569	2890	3212	3532	3854	4175	4496	4817
48 .0760	332	663	995	1327	1659	1991	2322	2654	2985	3317	3648	3980	4312	4644	4976
49 .0730	345	691	1036	1381	1727	2072	2418	2763	3109	3454	3799	4144	4493	4835	5180
50 .0700	360	720	1080	1441	1801	2161	2521	2882	3241	3602	3961	4322	4682	5042	5402
51 .0670	376	752	1129	1505	1882	2258	2634	3010	3386	3763	4139	4515	4893	527	5644
52 .0635	397	794	1191	1588	1985	2382	2779	3176	3573	3970	4369	4764	5161	5558	5955
53 .0595	423	847	1270	1694	2117	2540	2963	3386	3810	4233	4661	5085	5508	5932	6356
54 .0550	458	917	1375	1833	2292	2750	3209	3667	4126	4584	5042	5500	5958	6417	6875
55 .0520	485	970	1455	1939	2424	2909	3394	3879	4363	4848	5333	5818	6302	6787	7278
56 .0465	542	1084	1627	2169	2711	3253	3796	4338	4880	5422	5964	6506	7047	7590	8133
57 .0430	586	1173	1763	2350	2938	3526	4113	4701	5289	5876	6449	7036	7622	8208	8795
58 .0420	601	1201	1801	2400	3001	3601	4202	4802	5403	6003	6603	7203	7803	8403	9004
59 .0410	615	1230	1845	2459	3074	3689	4304	4919	5536	6149	6764	7379	7993	8608	9224
60 .0400	630	1261	1891	2521	3152	3781	4411	5042	5672	6302	6933	7563	8193	8824	9454

Cleveland offers an extensive array of threading tools. The Cleveland brand is known for performance tools that run faster, longer, and with more precision than competitive tools. This Threading section includes: high performance taps, various hand, flute, spiral, forming, and pipe taps as well as dies and assemblies. Also included are our carbide mini, and carbide helical thread mills. We have a large selection of surface treatments, and industry specific application products.



FAST TAP

Common Special Taps and Special Taps from Blanks



Delivery Matrix

Quantities listed are *maximum* pieces for working days listed. Common special taps and special taps from blanks.


Surface Treatments

(added days to lead times below)

Steam Oxide	2 days
Steam Oxide over Nitride	2 days
TiN	5 days
TiCN	7 days

	24 Hrs	2 Days	3 Days	4 Days	5 Days	6 Days
60 Degree Thread Forms						
Smaller Than #4	12	24	48			
#4 thru 1/4"	24	48				
5/16" thru 1/2"	24	48				
9/16" thru 1"	12	24	48			
** 1-1/16 thru 1-1/2"	6	12	24			
1-9/16 thru 3"	3	6				
Over 3"	1	3				
Pipe Taps						
1/16" thru 3/8"	6	24	48			
1/2" thru 1"	3	12	24			
1-1/4" thru 2"	2	6	12			
Over 2"	Delivery is 12 to 15 Working Days					
Form Taps						
0 thru 3/8"	12	24	48			
7/16" thru 3/4"	12	24		48		
13/16" thru 1"		12	24			
ACME/Buttress						
1/4" thru 1-1/2"					12	24
Tandem ACMEs						
3/8" thru 2"					12	

** Spiral Point add 1 day.


Threading Product Index144-147

Hand Taps	Pipe Taps
Straight Flute Taps	Dies
Spiral Point Taps	Wrenches
Spiral Flute Taps	Thread Mills
Form Taps	

Cost Saving Sets


Complete list of
Threading Sets188-189


**Technical
Information**

Tap Nomenclature / Chamfers	190
Tap and Drill Recommendations	192
Hardness Conversion Table	193
Standard Tap Marking Systems	194
Application Data	
Progress / Performance Taps	195
Tapping Speed	196
USCTI Table 302	198
USCTI Table 302A	199
USCTI Table 311	200
USCTI Table 327	201
USCTI Table 329	202
USCTI Table 331	203
USCTI Table 341	204
USCTI Table 352	205
Made to Order, Special Taps, FastTap	208



Gauging Threaded Holes	189
NPT vs. NPTF Taper Pipe Threads	189
How to request Made-to-Order taps	208
Ground Thread Tap Limits	209
Proper Use of Lubricants	209

Surface Treatment

Bright		TiCN	
Black Oxide		TiAlN	
TiN		Oxide Over Nitride	
Additional treatments available upon request.		AlCrN	



Straight Flute

Straight Flute					Tool Material	Blank	Chamfer			Application				Hole		Surface Treatment														
	Type	Style	Page	Set	HSS	HSS-E	302A	311	DIN / ANSI	Taper	Plug	Bottoming	Mod Bottoming	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind	Thru	Bright	Black Oxide	TiN	TiCN	TiAlN	AlCrN	Oxide over Nitride	Hardlube	
	General Purpose	1001	148	yes	•		•			•				•	•	•	•				•	•		•						
	General Purpose	1002	148	yes	•		•				•			•	•	•	•					•	•	•	•					
	General Purpose	1003	148	yes	•		•					•		•	•	•	•			•		•		•						
	Set (Styles: 1001, 1002, 1003)	1004	148	yes	•		•			•	•	•		•	•	•	•					•								
	General Purpose - Left Hand	1002L	152		•		•				•			•	•	•	•				•	•								
	Cast Iron	CI-1000	153			•	•						•	•		•	•		•	•				•				•		

Spiral Point

Spiral Point					Tool Material	Blank	Chamfer			Application					Hole	Surface Treatment												
	Type	Style	Page	Set	HSS	HSS-E	302A	311	DIN / ANSI	Taper	Plug	Bottoming	Mod Bottoming	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind	Thru	Bright	Black Oxide	TiN	TiCN	TiAlN	AlCrN	Oxide over Nitride
	General Purpose	1011	154		•		•				•			•	•	•	•				•	•	•	•	•			
	Low Shear	1053	157		•		•				•			•	•	•	•				•	•	•	•	•			
	Bottoming	1012	158		•		•					•		•	•	•	•			•		•	•	•	•			
	6" Extended Length	1011E	158		•		303-A				•			•	•	•	•				•	•	•	•	•			
	Stainless Steel & Steel	T-101	159			•					•			•	•	•	•				•	•	•	•	•			
	Universal	PRO-961SP	160			•			•		•			•	•	•	•				•	•	•	•	•			
	Universal	PRO-861SP				•			•		•				•	•	•	•				•	•	•	•	•		•
	Stainless Steel	PER-862SP	162			•			•		•			•	•	•	•				•	•	•	•	•			
	Stainless Steel	PER-960SP				•			•		•				•	•	•	•				•	•	•	•	•		

Spiral Flute


Spiral Flute					Tool Material	Blank	Chamfer			Application					Hole	Surface Treatment												
	Type	Style	Page	Set	HSS	HSS-E	302A	311	DIN / ANSI	Taper	Plug	Bottoming	Mod Bottoming	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind	Thru	Bright	Black Oxide	TiN	TiCN	TiAlN	AlCrN	Oxide over Nitride
	General Purpose	1093	164		•		•				•			•	•		•			•		•	•	•	•			
	General Purpose	1094	164		•		•					•		•	•		•			•		•	•	•	•			
	Heavy Duty	1095	165		•		•				•			•	•	•				•		•	•	•	•			
	Heavy Duty	1096	165		•		•					•		•	•	•				•		•	•	•	•			
	Stainless Steel & Steel	B-101	166			•	•						•	•	•	•				•		•	•	•	•			
	Universal	PRO-981SF	167					•					•	•	•	•				•		•	•	•	•			
	Universal	PRO-892SF				•		•					•	•	•	•	•				•			•	•	•		
	Stainless Steel	PER-893SF	169			•		•					•	•	•	•				•		•	•	•	•			
	Stainless Steel	PER-980SF				•		•					•	•	•	•	•				•			•	•	•		

Form

Form					Tool Material	Blank	Chamfer	Application					Hole	Surface Treatment														
					HSS	HSS-E	302A	311	DIN / ANSI	Taper	Plug	Bottoming	Mod Bottoming	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind	Thru	Bright	Black Oxide	TiN	TiCN	TiAlN	AlCrN	Oxide over Nitride
	Type	Style	Page	Set	•	•				•				•	•	•	•	•	•	•	•	•	•					
	General Purpose	1091	171																									
	General Purpose	1092	171		•	•					•			•	•	•	•	•	•	•	•	•	•					

Pipe

Pipe					Tool Material	Blank	Chamfer	Application					Hole	Surface Treatment													
					HSS	HSS-E	302A	311	DIN / ANSI	Taper Plug	Bottoming	Mod Bottoming	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Blind Thru	Bright	Black Oxide	TiN	TiCN	TiAlN	AlCrN	Oxide over Nitride	Hardtube
					Type	Style	Page	Set																			
	NPT Medium Hook	965	172		•		•		•				•	•	•	•	•			•	•	•					
	NPTF Medium Hook	975	172		•		•		•				•	•	•	•	•			•	•	•					
	NPT Interrupted Thread	964B	173		•		•		•				•	•	•	•	•			•	•	•					
	NPTF Interrupted Thread	966B	173		•		•		•				•	•	•	•	•			•	•	•					
	NPS	963B	174		•		•					•	•	•	•	•	•			•	•	•					
	NPSF	967B	174		•		•					•	•	•	•	•	•			•	•	•					

Thread Mills					Tool Material		Thread								Application					Coolant		Surface Treatment					
	Type	Style	Page	Set	HSS	Cobalt	Carbide	UNC	UNF	NPT	NPTF	Metric Course	Metric Fine	BSP	BSPT	DIN	Steel	Stainless	Cast Iron	Non-Ferrous	Special Alloy	Hardened Steel	Non	Thru	TAIN	AlCrN	Hardlube
	Mini	CMTM2, CMTMM2	175				•	•	•			•	•				•	•	•	•	•	•	•			•	
	Mini	CMTM3, CMTMM3	176				•	•	•			•	•				•	•	•	•	•	•	•			•	
	General Purpose - Inch	CTM, CTMC	177				•	•	•								•	•	•	•	•	•	•	•	•		
	General Purpose - Metric	CTMM, CTMMC	178				•									•	•	•	•	•	•	•	•	•	•		
	National Pipe Tapered	CTMNP, CTMNPC	178				•			•	•						•	•	•	•	•	•	•	•	•		
	British Pipe Tapered	CTMBPP, CTMBPPC	179				•							•			•	•	•	•	•	•	•	•	•		
	British Pipe Parallel	CTMBPT, CTMBPTC	179				•								•		•	•	•	•	•	•	•	•	•		

Dies						Tool Material			Surface Treatment								
		Type	Style	Page	Set	HSS	Carbon Steel	Steel	Bright	Black Oxide	TiN	TiCN	TiAlN	AlCrN	Oxide over Nitride	Hardlube	
	Hexagon Rethreading		0650, 0650M, 492	180-181	yes	•	•		•								
	Taper Pipe		0660			•	•		•								
	Round Adjustable		0610, 0710	182-184		•	•		•								
	Round Adjustable		0710M			•			•								
	Round Adjustable - Pipe		0620				•		•								
	Die Stock, Adjustable		222	184													
	Die Stock, Built-in Workpiece Guide		224	184													
	Die Set: Die Halves		0550	185-186				•	•								
	Die Set: Cap		0551					•	•								
	Die Set: Guide		0552					•	•								
	Die Set: Collet (cap and guide)		0553					•	•								
	Die Set Assembly (0550,0553,0551,0552)		0554					•	•								
	Quick Set Die Stock		223	186			•		•								
	Quick Set Jr. Die Stock		225	186			•		•								
	Quick Set Spanner Wrench		226	186													

Wrenches

	Type	Style	Page		Type	Style	Page
	Straight Wrench	240	187		Combo Ratchet & Slip Handle Wrench	244	187
	Plain T-Handle Wrench	242	187		Long Shank T-Handle Wrench	245	187
	Slip T-Handle Wrench	243	187				

General Purpose Inch



Styles: **1001, 1001TN, 1002, 1002SO, 1002TN, 1002TC, 1003, 1003TN, 1004**



Note

Tapping Speeds and Feeds begin on page 196.

Set # 1004 consists of one each taper, plug, and bottoming chamfers - Bright.

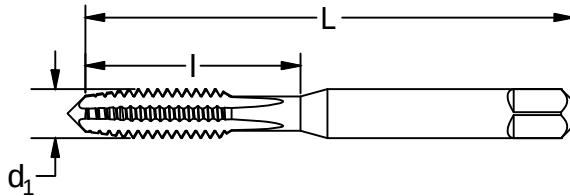

Feature:

New neck down style. Three different chamfers for maintenance and repair versatility.

tap size pitch d ₁	thrd form	dec. equiv.	# of flutes	H- limit	overall length L (in)	thread length l (in)	order number								
							Taper		Plug				Bottoming		Set
							1001 Bright	1001TN TiN	1002 Bright	1002SO Bl. oxide	1002TN TiN	1002TC TiCN	1003 Bright	1003TN TiN	1004 Bright
*0-80	UNF	.0600	2	H1	1.625	.313	C54025	—	C54026	—	—	—	C54027	—	—
*0-80	UNF	.0600	2	H2	1.625	.313	—	—	C54029	—	C55156	—	C54030	—	—
*1-64	UNC	.0730	2	H1	1.688	.375	C54055	—	C54056	—	—	—	C54057	—	—
*1-72	UNF	.0730	2	H1	1.688	.375	C54060	—	C54061	—	—	—	C54062	—	—
*2-56	UNC	.0860	3	H1	1.750	.375	C54083	—	C54084	—	—	—	C54085	—	—
*2-56	UNC	.0860	2	H2	1.750	.375	—	—	C54087	—	—	—	C54088	—	—
*2-56	UNC	.0860	3	H2	1.750	.375	C54089	—	C54090	—	C55158	C56050	C54091	—	C54092
*2-64	UNF	.0860	3	H2	1.750	.438	C54093	—	C54094	—	—	—	C54095	—	—
*3-48	UNC	.0990	3	H2	1.813	.500	C54115	—	C54116	—	—	—	C54117	—	C54118
*3-56	UNF	.0990	3	H2	1.813	.500	C54120	—	C54121	—	—	—	C54122	—	C54123
4-40	UNC	.1120	2	H1	1.875	.563	—	—	C54142	—	—	—	—	—	—
4-40	UNC	.1120	2	H2	1.875	.563	—	—	C54147	—	—	—	C54148	—	—
4-40	UNC	.1120	3	H2	1.875	.563	C54149	—	C54150	—	C55160	C56052	C54151	—	C54152
4-48	UNF	.1120	3	H2	1.875	.563	C54153	—	C54154	—	—	—	C54155	—	C54156
5-40	UNC	.1250	2	H2	1.938	.625	—	—	C54186	—	—	—	C54187	—	—
5-40	UNC	.1250	3	H2	1.938	.625	C54188	—	C54189	—	C55162	—	C54190	—	C54191
5-44	UNF	.1250	3	H2	1.938	.625	C54192	—	C54193	—	—	—	C54194	—	C54195
6-32	UNC	.1380	2	H2	2.000	.688	—	—	C54215	—	—	—	C54216	—	—
6-32	UNC	.1380	3	H2	2.000	.688	C54217	—	C54218	—	C55164	—	C54219	—	C54220
6-32	UNC	.1380	2	H3	2.000	.688	—	—	C54221	—	—	—	C54222	—	—
6-32	UNC	.1380	3	H3	2.000	.688	C54223	—	C54224	C56000	C55100	C56054	C54225	C55200	C54226
6-40	UNF	.1380	3	H2	2.000	.688	C54232	—	C54233	—	C55102	—	C54234	C55202	C54235
8-32	UNC	.1640	2	H1	2.125	.750	—	—	C54256	—	—	—	—	—	—
8-32	UNC	.1640	2	H2	2.125	.750	—	—	C54264	—	—	—	C54265	—	—
8-32	UNC	.1640	3	H2	2.125	.750	—	—	C54267	—	—	—	C54268	—	—
8-32	UNC	.1640	4	H2	2.125	.750	C54269	—	C54270	—	C55166	—	C54271	—	C54272
8-32	UNC	.1640	2	H3	2.125	.750	—	—	C54273	—	—	—	C54274	—	—
8-32	UNC	.1640	3	H3	2.125	.750	—	—	C54275	—	—	—	C54276	—	—
8-32	UNC	.1640	4	H3	2.125	.750	C54277	C54307	C54278	C56002	C55104	C56056	C54279	C55204	C54280
8-36	UNF	.1640	4	H2	2.125	.750	C54289	—	C54290	—	C55106	—	C54291	—	C54292
10-24	UNC	.1900	2	H2	2.375	.875	—	—	C54318	—	—	—	—	—	—
10-24	UNC	.1900	4	H2	2.375	.875	C54321	—	C54322	—	—	—	C54323	—	C54324
10-24	UNC	.1900	2	H3	2.375	.875	—	—	C54325	—	—	—	C54326	—	—
10-24	UNC	.1900	3	H3	2.375	.875	—	—	C54327	—	—	—	C54328	—	—
10-24	UNC	.1900	4	H3	2.375	.875	C54329	—	C54330	C56004	C55108	C56058	C54331	C55208	C54332
10-32	UNF	.1900	2	H2	2.375	.875	—	—	C54343	—	—	—	—	—	—
10-32	UNF	.1900	4	H2	2.375	.875	C54348	—	C54349	—	—	—	C54350	—	C54351
10-32	UNF	.1900	2	H3	2.375	.875	—	—	C54352	—	—	—	C54353	—	—

* #0 - #3 and larger than 1": 302 blank style.

continued on next page

tap size pitch	thrd form	dec. equiv.	# of flutes	H- limit	overall length L (in)	thread length l (in)	order number								
							Taper		Plug				Bottoming		Set
							1001 Bright	1001TN TiN	1002 Bright	1002SO Bl. oxide	1002TN TiN	1002TC TiCN	1003 Bright	1003TN TiN	1004 Bright
d ₁															
10-32	UNF	.1900	3	H3	2.375	.875	—	—	C54354	—	C55170	—	C54355	—	—
10-32	UNF	.1900	4	H3	2.375	.875	C54356	C54309	C54357	C56006	C55110	C56060	C54358	C55210	C54359
12-24	UNC	.2160	4	H3	2.375	.938	C54385	—	C54386	—	C55112	—	C54387	C55212	C54388
12-28	UNF	.2160	4	H3	2.375	.938	C54389	—	C54390	—	C55114	—	C54391	C55214	C54392
1/4-20	UNC	.2500	4	H1	2.500	1.000	C54443	—	C54444	—	—	—	C54445	—	C5444
1/4-20	UNC	.2500	3	H2	2.500	1.000	—	—	C54451	—	—	—	—	—	—
1/4-20	UNC	.2500	4	H2	2.500	1.000	C54448	—	C54449	—	—	—	C54450	—	C54452
1/4-20	UNC	.2500	2	H3	2.500	1.000	—	—	C54456	—	—	—	C54457	—	—
1/4-20	UNC	.2500	3	H3	2.500	1.000	—	—	C54458	—	—	—	C54459	—	—
1/4-20	UNC	.2500	4	H3	2.500	1.000	C54453	—	C54454	C56008	C55116	C56062	C54455	C55216	C54460
1/4-20	UNC	.2500	3	H5	2.500	1.000	—	—	C54463	—	—	—	—	—	—
1/4-20	UNC	.2500	4	H5	2.500	1.000	—	—	C54461	—	—	—	C54462	—	—
1/4-20	UNC	.2500	4	H11	2.500	1.000	—	—	C54464	—	—	—	—	—	—
1/4-28	UNF	.2500	4	H2	2.500	1.000	—	—	C54467	—	—	—	C54468	—	—
1/4-28	UNF	.2500	2	H3	2.500	1.000	—	—	C54472	—	—	—	C54473	—	—
1/4-28	UNF	.2500	3	H3	2.500	1.000	—	—	C54474	—	—	—	C54475	—	—
1/4-28	UNF	.2500	4	H3	2.500	1.000	C54469	—	C54470	C56010	C55118	C56064	C54471	C55218	C54476
5/16-18	UNC	.3125	4	H2	2.719	1.125	—	—	C54502	—	—	—	C54503	—	—
5/16-18	UNC	.3125	2	H3	2.719	1.125	—	—	C54507	—	—	—	C54508	—	—
5/16-18	UNC	.3125	3	H3	2.719	1.125	—	—	C54509	—	—	—	C54510	—	—
5/16-18	UNC	.3125	4	H3	2.719	1.125	C54504	—	C54505	C56012	C55120	C56066	C54506	C55220	C54511
5/16-18	UNC	.3125	4	H5	2.719	1.125	—	—	C54512	—	—	—	C54513	—	—
5/16-18	UNC	.3125	4	H11	2.719	1.125	—	—	C54514	—	—	—	—	—	—
5/16-24	UNF	.3125	3	H3	2.719	1.125	—	—	C54521	—	—	—	C54522	—	—
5/16-24	UNF	.3125	4	H3	2.719	1.125	C54518	—	C54519	—	C55122	—	C54520	C55222	C54523
5/16-24	UNF	.3125	4	H4	2.719	1.125	—	—	C54524	—	—	—	C54525	—	—
3/8-16	UNC	.3750	4	H2	2.938	1.250	—	—	C54580	—	C55124	—	C54581	—	—
3/8-16	UNC	.3750	3	H3	2.938	1.250	—	—	C54585	—	C55180	—	C54586	—	—
3/8-16	UNC	.3750	4	H3	2.938	1.250	C54582	—	C54583	C56014	—	C56070	C54584	C55224	C54587
3/8-16	UNC	.3750	4	H5	2.938	1.250	—	—	C54588	—	—	—	C54589	—	—
3/8-24	UNF	.3750	3	H3	2.938	1.250	—	—	C54598	—	—	—	C54599	—	—
3/8-24	UNF	.3750	4	H3	2.938	1.250	C54595	—	C54596	C56016	C55126	—	C54597	C55226	C54600
7/16-14	UNC	.4375	4	H3	3.156	1.438	C54652	—	C54653	—	C55128	—	C54654	C55228	C54656
7/16-14	UNC	.4375	4	H5	3.156	1.438	—	—	C54658	—	—	—	C54659	—	—
7/16-20	UNF	.4375	4	H3	3.156	1.438	C54661	—	C54662	—	C55130	—	C54663	C55230	C54665
7/16-20	UNF	.4375	4	H5	3.156	1.438	—	—	C54666	—	—	—	C54667	—	—
1/2-13	UNC	.5000	4	H1	3.375	1.656	—	—	C54724	—	—	—	—	—	—
1/2-13	UNC	.5000	3	H3	3.375	1.656	—	—	C54729	—	—	—	C54730	—	—
1/2-13	UNC	.5000	4	H3	3.375	1.656	C54726	—	C54727	C56020	C55132	C56076	C54728	C55232	C54731
1/2-13	UNC	.5000	4	H5	3.375	1.656	—	—	C54732	—	—	—	C54733	—	—
1/2-20	UNF	.5000	3	H3	3.375	1.656	—	—	C54740	—	—	—	—	—	—
1/2-20	UNF	.5000	4	H3	3.375	1.656	C54737	—	C54738	—	C55134	—	C54739	C55234	C54741
1/2-20	UNF	.5000	4	H5	3.375	1.656	—	—	C54742	—	—	—	—	—	—

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
Bright	◆		◆		◆			◆	◆	◆			
TiN	◆		◆		◆			◆	◆				
TiCN	☆		☆		☆	◆		☆	☆	☆			

☆ = Best Performance ◆ = Acceptable

tap size pitch d ₁	thrd form	dec. equiv.	# of flutes	H- limit	overall length L (in)	thread length l (in)	order number								
							Taper		Plug			Bottoming		Set	
							1001 Bright	1001TN TiN	1002 Bright	1002SO Bl. oxide	1002TN TiN	1002TC TiCN	1003 Bright	1003TN TiN	1004 Bright
9/16-12	UNC	.5625	4	H3	3.594	1.656	C54759	—	C54760	—	C55136	—	C54761	C55236	C54762
9/16-18	UNF	.5625	4	H3	3.594	1.656	C54765	—	C54766	—	C55138	—	C54767	C55238	C54768
5/8-11	UNC	.6250	4	H3	3.813	1.813	C54779	—	C54780	C56028	C55140	—	C54781	C55240	C54782
5/8-11	UNC	.6250	4	H5	3.813	1.813	—	—	C54783	—	—	—	C54784	—	—
5/8-18	UNF	.6250	4	H3	3.813	1.813	C54787	—	C54788	—	C55142	—	C54789	C55242	C54790
11/16-11	UNS	.6875	4	H3	4.031	1.813	C54813	—	C54814	—	—	—	C54815	—	C54816
11/16-16	UNS	.6875	4	H3	4.031	1.813	C54817	—	C54818	—	—	—	C54819	—	C54820
3/4-10	UNC	.7500	4	H3	4.250	2.000	C54838	—	C54839	—	C55144	—	C54840	C55244	C54841
3/4-16	UNF	.7500	4	H3	4.250	2.000	C54846	—	C54847	—	C55146	—	C54848	C55246	C54849
7/8-9	UNC	.8750	4	H4	4.688	2.219	C54884	—	C54885	—	C55148	—	C54886	C55248	C54887
7/8-14	UNF	.8750	4	H4	4.688	2.219	C54890	—	C54891	—	C55150	—	C54892	C55250	C54893
1-8	UNC	1.0000	4	H4	5.125	2.500	C54923	—	C54924	—	C55152	—	C54925	C55252	C54926
1-12	UNF	1.0000	4	H4	5.125	2.500	C54928	—	C54929	—	C55154	—	C54930	—	—
1-14	UNS	1.0000	4	H4	5.125	2.500	C54933	—	C54934	—	—	—	C54935	—	C54936
*1-1/8-7	UNC	1.1250	4	H4	5.438	2.563	C54965	—	C54966	—	—	—	C54967	—	—
*1-1/8-12	UNF	1.1250	4	H4	5.438	2.563	C54971	—	C54972	—	—	—	C54973	—	—
*1-1/4-7	UNC	1.2500	4	H4	5.750	2.563	C54994	—	C54995	—	—	—	C54996	—	—
*1-1/4-12	UNF	1.2500	6	H4	5.750	2.563	C55000	—	C55001	—	—	—	C55002	—	—
*1-3/8-6	UNC	1.3750	4	H4	5.750	2.563	—	—	C55028	—	—	—	—	—	—
*1-3/8-12	UNF	1.3750	6	H4	5.750	2.563	—	—	C55031	—	—	—	C55032	—	—
*1-1/2-6	UNC	1.5000	4	H4	6.375	3.000	C55057	—	C55058	—	—	—	C55059	—	—
*1-1/2-12	UNF	1.5000	6	H4	6.375	3.000	C55063	—	C55064	—	—	—	C55065	—	—


* #0 - #3 and larger than 1": 302 blank style.

Hand Taps

SET

Style: **1002**

plug chamfer	bright finish		order number
Tap Sizes: UNC	1/4-20, 5/16-18, 3/8-16, 7/16-14, 1/2-13		1002 C55090
UNF	1/4-28, 5/16-24, 3/8-24, 7/16-20, 1/2-20		





Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	◆		◆		◆		◆	◆	◆			
	TiN	◆		◆		◆		◆	◆				
	TiCN	☆		☆		☆	◆	☆	☆	☆			

☆ = Best Performance

◆ = Acceptable

Styles: 1001, 1002, 1003, 1004
Note

Tapping Speeds and Feeds
begin on page 196.

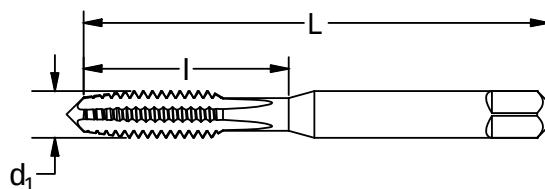Set #1004 consists of
one each taper, plug, and
bottoming chamfers - Bright.

Feature:

New neck down style.

tap size pitch	thrd form	dec. equiv.	metric equiv.	# of flutes	D- limit	overall length L		thread length I		order number			
						in	mm	in	mm	Taper 1001 Bright	Plug 1002 Bright	Bottoming 1003 Bright	Set 1004 Bright
*M1.6 x 0.35		.0630	1.60	2	D3	1.625	41.28	.313	7.94	—	C54044	C54045	—
*M2 x 0.4		.0787	2.00	3	D3	1.750	44.45	.438	11.11	C54073	C54074	C54075	—
*M2.5 x 0.45		.0984	2.50	3	D3	1.813	46.04	.500	12.70	C54131	C54132	C54133	—
M3 x 0.5		.1181	3.00	3	D3	1.938	49.21	.625	15.88	C54164	C54165	C54166	C54167
M3.5 x 0.6		.1378	3.50	3	D4	2.000	50.80	.688	17.46	C54203	C54204	C54205	—
M4 x 0.7		.1575	4.00	4	D4	2.125	53.98	.750	19.05	C54246	C54247	C54248	C54249
M4.5 x 0.75		.1771	4.50	4	D4	2.375	60.33	.875	22.23	C54303	C54304	C54305	—
M5 x 0.8		.1968	5.00	4	D4	2.375	60.33	.875	22.23	C54374	C54375	C54376	C54377
M6 x 1		.2362	6.00	4	D5	2.500	63.50	1.000	25.40	C54413	C54414	C54415	C54416
M7 x 1		.2756	7.00	4	D5	2.719	69.06	1.125	28.58	C54489	C54490	C54491	—
M8 x 1		.3150	8.00	4	D5	2.719	69.06	1.125	28.58	C54536	C54537	C54538	—
M8 x 1.25		.3150	8.00	4	D5	2.719	69.06	1.125	28.58	C54546	C54547	C54548	C54539
M10 x 1.25		.3937	10.00	4	D5	2.938	74.61	1.250	31.75	C54617	C54618	C54619	—
M10 x 1.5		.3937	10.00	4	D6	2.938	74.61	1.250	31.75	C54624	C54625	C54626	C54627
M12 x 1.25		.4724	12.00	4	D5	3.375	85.73	1.656	42.07	C54675	C54676	C54677	—
M12 x 1.75		.4724	12.00	4	D6	3.375	85.73	1.656	42.07	C54689	C54690	C54691	C54692
M14 x 1.5		.5512	14.00	4	D6	3.594	91.28	1.656	42.07	C54751	C54752	C54753	—
M14 x 2		.5512	14.00	4	D7	3.594	91.28	1.656	42.07	C54755	C54756	C54757	C54758
M16 x 1.5		.6299	16.00	4	D6	3.813	96.84	1.813	46.04	C54797	C54798	C54799	—
M16 x 2		.6299	16.00	4	D7	3.813	96.84	1.813	46.04	C54801	C54802	C54803	C54804
M18 x 1.5		.7087	18.00	4	D6	4.031	102.39	1.813	46.04	C54825	C54826	—	—
M18 x 2.5		.7087	18.00	4	D7	4.031	102.39	1.813	46.04	C54833	C54834	C54835	—
M20 x 1.5		.7874	20.00	4	D6	4.469	113.51	2.000	50.80	—	C54857	C54858	—
M20 x 2.5		.7874	20.00	4	D7	4.469	113.51	2.000	50.80	C54864	C54865	C54866	C54867
M24 x 3		.9449	24.00	4	D8	4.906	124.62	2.219	56.36	C54907	C54908	C54909	—
M30 x 3.5		1.1811	30.00	4	D9	5.438	138.11	2.563	65.09	—	C54991	—	—

*M1.6-M2.5 and larger than M25: 302 blank style

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32	★	★	★	>45
	Bright	★		★		★		★	★	★			

☆ = Best Performance ★ = Acceptable

General Purpose Left Hand



Styles: **1002L**

Note


Tapping Speeds and Feeds
begin on page 196.

HSS



Surface
Treatment

Bright

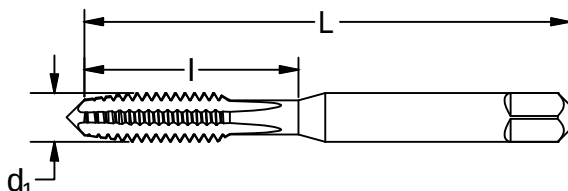

tap size and pitch d_1	thread form	decimal equiv.	number of flutes	H- limit	overall length L (in)	thread length I (in)	order number 1002L Bright
#10-32	UNF	.1900	4	H3	2.3750	.8750	C60732
1/4-20	UNC	.2500	4	H3	2.5000	1.0000	C60748
1/4-28	UNF	.2500	4	H3	2.5000	1.0000	C60752
5/16-18	UNC	.3125	4	H3	2.7190	1.1250	C60760
5/16-24	UNF	.3125	4	H3	2.7190	1.1250	C60764
3/8-16	UNC	.3750	4	H3	2.9380	1.2500	C60776
3/8-24	UNF	.3750	4	H3	2.9380	1.2500	C60780
7/16-20	UNF	.4375	4	H3	3.1560	1.4380	C60796
1/2-13	UNC	.5000	4	H3	3.3750	1.6560	C60808
1/2-20	UNF	.5000	4	H3	3.3750	1.6560	C60812
5/8-18	UNF	.6250	4	H3	3.8130	1.8130	C60831
3/4-10	UNC	.7500	4	H3	4.2500	2.0000	C60835
3/4-16	UNF	.7500	4	H3	4.2500	2.0000	C60866

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆				◆		☆			

☆ = Best Performance ◆ = Acceptable

Styles: **CI-1000, CI-1000-TC**


Cast Iron - Inch
& Harder Materials

Note
Tapping Speeds and Feeds
begin on page 196.

HSS-E



Surface
Treatment

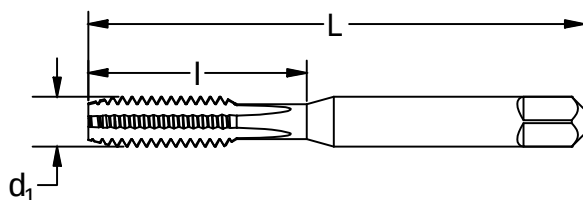

Feature:

Premium steel substrate.

tap size and pitch	thread form	decimal equiv.	number of flutes	H- limit	overall length		thread length		order number	
					L (in)		I (in)		CI-1000 Oxide over Nitride	CI-1000-TC TiCN
10-24	UNC	.1900	4	H3	2.375		.875		C27636	—
10-32	UNF	.1900	4	H3	2.375		.875		C27637	—
1/4-20	UNC	.2500	4	H3	2.500		1.000		C27638	C28022
1/4-20	UNC	.2500	4	H5	2.500		1.000		C27655	—
1/4-28	UNF	.2500	4	H3	2.500		1.000		C27639	—
5/16-18	UNC	.3125	4	H3	2.719		1.125		C27640	C28024
5/16-18	UNC	.3125	4	H5	2.719		1.125		C27656	—
5/16-24	UNF	.3125	4	H3	2.719		1.125		C27641	—
3/8-16	UNC	.3750	4	H3	2.938		1.250		C27642	—
3/8-16	UNC	.3750	4	H5	2.938		1.250		C27657	—
7/16-14	UNC	.4375	4	H3	3.156		1.438		C27644	—
7/16-14	UNC	.4375	4	H5	3.156		1.438		C27658	—
1/2-13	UNC	.5000	4	H3	3.375		1.656		C27646	—
1/2-13	UNC	.5000	4	H5	3.375		1.656		C27660	—
1/2-20	UNF	.5000	4	H5	3.375		1.656		C27661	—
3/4-16	UNF	.7500	6	H5	4.250		2.000		C27667	—

Straight Flute

High Speed Steel

Styles: **CI-1000, CI-1000-TC**

Cast Iron - Inch
& Harder Materials

tap size and pitch d ₁	decimal equiv.	number of flutes	D- limit	overall length		thread length		order number	
				in	mm	in	mm	CI-1000 Oxide over Nitride	CI-1000-TC TiCN
M5x0.8	0.1968	4	D4	2.375	60.33	.875	22.23	C27668	—
M6x1	0.2362	4	D5	2.500	63.50	1.000	25.4	C27669	—
M8x1.25	0.3150	4	D5	2.719	69.06	1.125	28.58	C27670	—
M10x1.5	0.3937	4	D6	2.938	74.61	1.250	31.75	C27671	C28055
M12x1.25	0.4724	4	D6	3.375	85.73	1.656	42.06	C27672	—
M12x1.75	0.4724	4	D6	3.375	85.73	1.656	42.06	C27673	C28057
M14x1.5	0.5512	4	D6	3.594	91.28	1.656	42.06	C27675	—

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Oxide over Nitride		★		★				☆					★
☆ = Best Performance ★ = Acceptable													


Note

Tapping Speeds and Feeds
begin on page 196.

HSS



Surface
Treatment

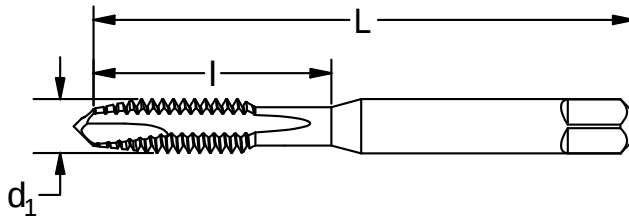

Feature:

Thru hole application in a variety of materials.

tap size and pitch d_1	thread form	decimal equiv	no. of flutes	H- limit	overall length L (in)	thread length I (in)	order number			
							1011 Bright	1011SO Black Oxide	1011TN TiN	1011TC TiCN
*0-80	UNF	.0600	2	H1	1.688	.313	C57009	—	—	—
*0-80	UNF	.0600	2	H2	1.688	.313	C57011	C57600	C55290	C55370
*1-64	UNC	.0730	2	H2	1.688	.375	C57022	—	—	—
*1-72	UNF	.0730	2	H1	1.688	.375	C57023	—	—	—
*1-72	UNF	.0730	2	H2	1.688	.375	C57024	—	—	—
*2-56	UNC	.0860	2	H2	1.750	.438	C57031	C57602	C55292	C55372
*2-64	UNF	.0860	2	H2	1.750	.438	C57033	—	—	—
*3-48	UNC	.0990	2	H2	1.813	.500	C57038	—	C55294	—
*3-56	UNF	.0990	2	H2	1.813	.500	C57041	—	—	—
4-40	UNC	.1120	2	H1	1.875	.563	C57047	—	—	—
4-40	UNC	.1120	2	H2	1.875	.563	C57048	C57604	C55296	C55374
4-48	UNF	.1120	2	H2	1.875	.563	C57051	—	—	—
5-40	UNC	.1250	2	H2	1.938	.625	C57062	C57606	C55298	C55376
6-32	UNC	.1380	2	H1	2.000	.688	C57069	—	—	—
6-32	UNC	.1380	2	H2	2.000	.688	C57070	C57608	C55299	—
6-32	UNC	.1380	2	H3	2.000	.688	C57072	C57609	C55300	C55378
6-32	UNC	.1380	2	H7	2.000	.688	C57074	—	—	—
6-40	UNF	.1380	2	H2	2.000	.688	C57076	—	C55302	—
8-32	UNC	.1640	2	H2	2.125	.750	C57083	C57610	C55303	—
8-32	UNC	.1640	2	H3	2.125	.750	C57085	C57611	C55304	C55380
8-32	UNC	.1640	2	H7	2.125	.750	C57087	—	C55305	—
8-36	UNF	.1640	2	H2	2.125	.750	C57089	—	C55306	—
10-24	UNC	.1900	2	H1	2.375	.875	C57094	—	—	—
10-24	UNC	.1900	2	H2	2.375	.875	C57095	—	C55307	—
10-24	UNC	.1900	2	H3	2.375	.875	C57097	C57001	C55308	C55382
10-24	UNC	.1900	2	H7	2.375	.875	C57099	—	C55309	—
10-32	UNF	.1900	2	H2	2.375	.875	C57102	—	C55311	—
10-32	UNF	.1900	2	H3	2.375	.875	C57104	C57002	C55310	C55383
10-32	UNF	.1900	2	H7	2.375	.875	C57106	—	C55346	—
12-24	UNC	.2160	2	H3	2.375	.938	C57112	C57616	C55312	C55384
12-28	UNF	.2160	2	H3	2.375	.938	C57114	—	C55313	—
1/4-20	UNC	.2500	2	H1	2.500	1.000	C57127	—	C55348	—
1/4-20	UNC	.2500	2	H2	2.500	1.000	C57128	C57618	C55315	—
1/4-20	UNC	.2500	2	H3	2.500	1.000	C57129	C57619	C55316	—
1/4-20	UNC	.2500	3	H3	2.500	1.000	C57130	C57620	—	C55386
1/4-20	UNC	.2500	2	H5	2.500	1.000	C57132	—	C55317	—
1/4-20	UNC	.2500	3	H5	2.500	1.000	C57133	—	—	—
1/4-20	UNC	.2500	2	H11	2.500	1.000	C57135	—	—	—
1/4-28	UNF	.2500	2	H2	2.500	1.000	C57137	—	—	—

* #0 - #3: 302 blank style.

continued on next page

tap size and pitch d₁	thread form	decimal equiv	no. of flutes	H- limit	overall length L (in)	thread length I (in)	order number			
							1011 Bright	1011SO Black Oxide	1011TN TiN	1011TC TiCN
1/4-28	UNF	.2500	3	H2	2.500	1.000	C57138	—	—	C55387
1/4-28	UNF	.2500	2	H3	2.500	1.000	C57139	C57622	C55318	—
5/16-18	UNC	.3125	2	H1	2.719	1.125	C57149	—	—	—
5/16-18	UNC	.3125	2	H2	2.719	1.125	C57150	—	C55319	—
5/16-18	UNC	.3125	2	H3	2.719	1.125	C57151	C57624	C55320	—
5/16-18	UNC	.3125	3	H3	2.719	1.125	C57152	C57625	C55321	C55388
5/16-18	UNC	.3125	2	H5	2.719	1.125	C57154	—	C55354	—
5/16-18	UNC	.3125	3	H5	2.719	1.125	C57155	—	C55355	—
5/16-24	UNF	.3125	2	H1	2.719	1.125	C57157	—	—	—
5/16-24	UNF	.3125	2	H3	2.719	1.125	C57160	C57626	C55322	—
5/16-24	UNF	.3125	3	H4	2.719	1.125	C57164	—	—	C55389
3/8-16	UNC	.3750	3	H2	2.938	1.250	C57175	—	C55323	—
3/8-16	UNC	.3750	3	H3	2.938	1.250	C57176	C57628	C55324	C55390
3/8-16	UNC	.3750	3	H5	2.938	1.250	C57177	—	C55325	—
3/8-24	UNF	.3750	3	H1	2.938	1.250	C57179	—	—	—
3/8-24	UNF	.3750	3	H2	2.938	1.250	C57180	—	—	—
3/8-24	UNF	.3750	3	H3	2.938	1.250	C57181	C57630	C55326	C55391
3/8-24	UNF	.3750	3	H4	2.938	1.250	C57182	—	—	—
7/16-14	UNC	.4375	3	H2	3.156	1.438	C57191	—	—	—
7/16-14	UNC	.4375	3	H3	3.156	1.438	C57192	C57632	C55328	—
7/16-14	UNC	.4375	3	H5	3.156	1.438	C57193	—	—	—
7/16-20	UNF	.4375	3	H3	3.156	1.438	C57195	—	C55330	C55392
7/16-20	UNF	.4375	3	H5	3.156	1.438	C57196	—	—	—
1/2-13	UNC	.5000	3	H2	3.375	1.656	C57214	—	—	—
1/2-13	UNC	.5000	3	H3	3.375	1.656	C57215	C57636	C55332	C55394
1/2-13	UNC	.5000	3	H5	3.375	1.656	C57216	—	C55333	—
1/2-20	UNF	.5000	3	H3	3.375	1.656	C57220	C57638	C55334	C55395
5/8-11	UNC	.6250	3	H3	3.813	1.813	C57230	C57640	C55336	C55396
5/8-11	UNC	.6250	3	H5	3.813	1.813	C57232	—	—	—
5/8-18	UNF	.6250	3	H3	3.813	1.813	C57555	C57642	—	—
3/4-10	UNC	.7500	3	H3	4.250	2.000	C57246	C57644	C55338	C55398
3/4-10	UNC	.7500	3	H5	4.250	2.000	C57247	—	—	—
3/4-16	UNF	.7500	3	H3	4.250	2.000	C60999	—	—	—

continued on next page

Spiral Point

High Speed Steel


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
TiN	★			★		★				★			
TiCN	★			★		★		★					

★ = Best Performance ◆ = Acceptable

Note
Tapping Speeds and Feeds
begin on page 196.



Surface
Treatment

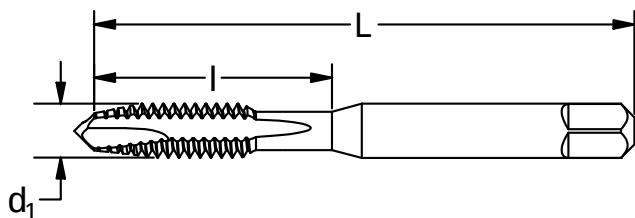

Feature:

Thru hole application in a variety of materials.

tap size and pitch d ₁	decimal equiv	no. of flutes	D- limit	overall length L		thread length I		order number		
				in	mm	in	mm	1011 Bright	1011TN TiN	1011TC TiCN
*M1.6 x 0.35	.0630	2	D3	1.750	44.45	.313	11.11	C57015	—	—
*M1.8 x 0.35	.0709	2	D3	1.750	44.45	.375	11.11	C57019	—	—
*M2 x 0.4	.0787	2	D3	1.750	44.45	.438	11.11	C57027	—	—
*M2.2 x 0.45	.0866	2	D3	1.750	44.45	.438	11.11	C57036	—	—
*M2.5 x 0.45	.0984	2	D3	1.813	46.04	.500	12.70	C57044	—	—
M3 x 0.5	.1181	2	D3	1.938	49.21	.625	15.88	C57055	C55360	C55415
M3.5 x 0.6	.1378	2	D4	2.000	50.80	.688	17.46	C57067	—	—
M4 x 0.7	.1575	2	D4	2.125	53.98	.750	19.05	C57080	C55361	C55416
M4.5 x 0.75	.1771	2	D4	2.375	60.33	.875	22.23	C57092	—	—
M5 x 0.8	.1968	2	D4	2.375	60.33	.875	22.23	C57110	—	C55417
M6 x 1	.2362	2	D5	2.500	63.50	1.000	25.40	C57118	C55362	C55418
M7 x 1	.2756	2	D5	2.719	69.06	1.125	28.58	C57146	—	—
M8 x 1	.3150	2	D5	2.719	69.06	1.125	28.58	C57168	—	—
M8 x 1.25	.3150	2	D5	2.719	69.06	1.125	28.58	C57171	C55363	C55419
M10 x 1.25	.3937	3	D5	2.938	74.61	1.250	31.75	C57187	—	—
M10 x 1.5	.3937	3	D6	2.938	74.61	1.250	31.75	C57189	C55364	C55420
M12 x 1.25	.4724	3	D5	3.375	85.73	1.656	42.07	C57199	—	—
M12 x 1.75	.4724	3	D6	3.375	85.73	1.656	42.07	C57203	C55365	C55421
M14 x 1.5	.5512	3	D6	3.594	91.28	1.656	42.07	C57226	—	—
M14 x 2	.5512	3	D7	3.594	91.28	1.656	42.07	C57228	—	—
M16 x 1.5	.6299	3	D6	3.813	96.84	1.813	46.04	C57234	—	—
M16 x 2	.6299	3	D7	3.813	96.84	1.813	46.04	C57236	—	—
M20 x 2.5	.7874	3	D7	3.813	96.84	2.000	46.04	C57253	—	—

*M1.6-M2.5: 302 blank style


Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
TiN	★			★		★				★			
TiCN	☆			☆		☆		★					

☆ = Best Performance ★ = Acceptable

Styles: 1053
Low Shear
Note

Tapping Speeds and Feeds
begin on page 196.

HSS

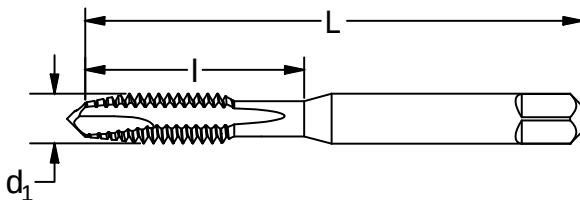
Surface
Treatment

Feature:

Thru hole applications in iron and harder steels.

tap size and pitch d₁	thread form	decimal equiv.	number of flutes	H- limit	overall length L (in)	thread length I (in)	order number 1053
4-40	UNC	.1120	2	H2	1.875	.563	C57324
5-40	UNC	.1250	2	H2	1.938	.625	C57338
6-32	UNC	.1380	2	H3	2.000	.688	C57348
8-32	UNC	.1640	2	H3	2.125	.750	C57361
10-24	UNF	.1900	2	H3	2.375	.875	C57373
10-32	UNC	.1900	2	H3	2.375	.875	C57380
12-24	UNC	.2160	2	H3	2.375	.938	C57388
1/4-20	UNC	.2500	2	H1	2.500	1.000	C57403
1/4-20	UNC	.2500	2	H2	2.500	1.000	C57404
1/4-20	UNC	.2500	2	H3	2.500	1.000	C57406
1/4-20	UNC	.2500	2	H11	2.500	1.000	C57411
1/4-28	UNF	.2500	2	H3	2.500	1.000	C57415
5/16-18	UNC	.3125	2	H3	2.719	1.125	C57428
5/16-24	UNF	.3125	2	H3	2.719	1.125	C57437
3/8-16	UNC	.3750	3	H3	2.938	1.250	C57452
7/16-14	UNC	.4375	3	H3	3.156	1.438	C57469
1/2-13	UNC	.5000	3	H3	3.375	1.656	C57492
5/8-11	UNC	.6250	3	H3	3.813	1.813	C57507

Spiral Point

High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆				☆	◆				



☆ = Best Performance

◆ = Acceptable

Bottoming

Styles: 1012

Note
Tapping Speeds and Feeds begin on page 196.

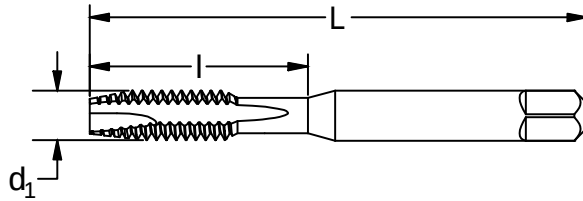



tap size and pitch d ₁	thread form	decimal equiv.	number of flutes	H-limit	overall length L (in)	thread length I (in)	order number 1012
*0-80	UNF	.0600	2	H2	1.625	.313	C57012
*2-56	UNC	.0860	2	H2	1.750	.438	C57032
4-40	UNC	.1120	2	H2	1.875	.563	C57049
5-40	UNC	.1250	2	H2	1.938	.625	C57063
6-32	UNC	.1380	2	H3	2.000	.688	C57073
8-32	UNC	.1640	2	H3	2.125	.750	C57086
10-24	UNC	.1900	2	H3	2.375	.875	C57098
10-32	UNF	.1900	2	H3	2.375	.875	C57105
1/4-20	UNC	.2500	2	H3	2.500	1.000	C57131
1/4-28	UNF	.2500	2	H3	2.500	1.000	C57140
5/16-18	UNC	.3125	3	H3	2.719	1.125	C57153
5/16-24	UNF	.3125	2	H3	2.719	1.125	C57162

*#0-#2: 302 blank style

6" Extended Length

Styles: 1011E

Note
Tapping Speeds and Feeds begin on page 196.

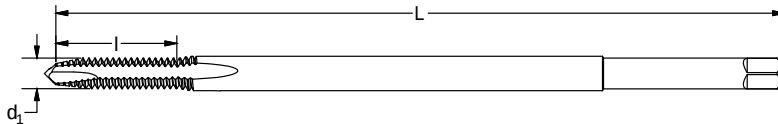

Feature:

Extended length for long reach applications.

tap size and pitch d ₁	thread form	decimal equiv.	number of flutes	H-limit	overall length L (in)	thread length I (in)	order number 1011E
#8-32	UNC	.1640	2	H3	6.0000	.7500	C59106
#10-24	UNC	.1900	2	H3	6.0000	.8750	C59109
#10-32	UNF	.1900	2	H3	6.0000	.8750	C59110
1/4-20	UNC	.2500	2	H3	6.0000	1.0000	C59117
1/4-28	UNF	.2500	2	H3	6.0000	1.0000	C59118
5/16-18	UNC	.3125	2	H3	6.0000	1.1250	C59121
5/16-24	UNF	.3125	2	H3	6.0000	1.1250	C59122
3/8-16	UNC	.3750	3	H3	6.0000	1.2500	C59126
3/8-24	UNF	.3750	3	H3	6.0000	1.2500	C59127

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
1012 Bright	☆							◆		☆			
1011E Bright	☆		☆					☆		◆			

☆ = Best Performance


◆ = Acceptable

Style: T-101
Stainless Steel & Steels
SD Powder Metal

Note

Tapping Speeds and Feeds
begin on page 196.


Surface Treatment

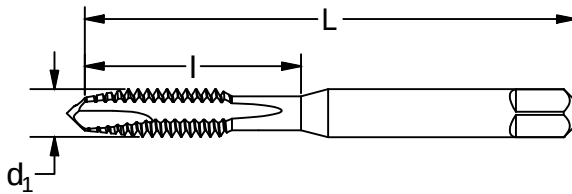Black Oxide

Feature:

Premium steel substrate for steels and stainless.

tap size and pitch d_1	thread form	decimal equiv.	number of flutes	H-Limit	overall length L (in)	thread length I (in)	order no. T-101
4-40	UNC	.1120	2	H2	1.875	.563	C27689
6-32	UNC	.1380	2	H3	2.000	.688	C27696
8-32	UNC	.1640	3	H3	2.125	.750	C27697
8-32	UNC	.1640	3	H5	2.125	.750	C27720
10-24	UNC	.1900	3	H3	2.375	.875	C27698
10-32	UNF	.1900	3	H3	2.375	.875	C27699
1/4-20	UNC	.2500	3	H3	2.500	1.000	C27700
1/4-20	UNC	.2500	3	H5	2.500	1.000	C27723
5/16-18	UNC	.3125	3	H3	2.719	1.125	C27702
5/16-24	UNF	.3125	3	H3	2.719	1.125	C27703
3/8-16	UNC	.3750	3	H3	2.938	1.250	C27704
1/2-13	UNC	.5000	3	H3	3.375	1.656	C27708

Made To Order
Taps Available



Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Black Oxide	☆		☆		☆	☆	◆	◆	◆				


☆ = Best Performance ◆ = Acceptable

Note
Tapping Speeds and
Feeds begin on page 196.

Styles: **PRO-961SP** and **PRO-861SP**



Surface
Treatment

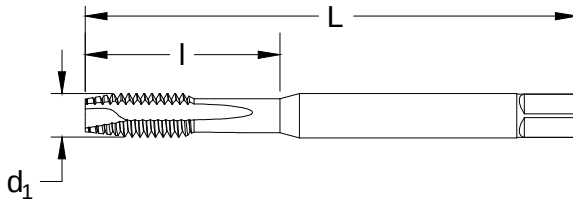

Feature:

Premium steel substrate, for use in a wide array of materials.

tap size and pitch d ₁	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter	overall length L (in)	thread length I (in)	order number	
								Black Oxide PRO-961SP	TiAlN PRO-861SP
2-56	UNC	0.0860	3	2B	0.141	1.772	0.551	C96101	C86101
3-48	UNC	0.0990	3	2B	0.141	1.969	0.591	C96102	C86102
4-40	UNC	0.1120	3	2B	0.141	2.205	0.669	C96103	C86103
4-48	UNF	0.1120	3	2B	0.141	2.205	0.669	C96104	C86104
5-40	UNC	0.1250	3	2B	0.141	2.205	0.748	C96105	C86105
6-32	UNC	0.1380	3	2B	0.141	2.205	0.787	C96106	C86106
6-40	UNF	0.1380	3	2B	0.141	2.205	0.787	C96107	C86107
8-32	UNC	0.1640	3	2B	0.168	2.480	0.827	C96108	C86108
8-36	UNF	0.1640	3	2B	0.168	2.480	0.827	C96109	C86109
10-24	UNC	0.1900	3	2B	0.194	2.756	1.024	C96110	C86110
10-32	UNF	0.1900	3	2B	0.194	2.756	1.024	C96111	C86111
12-24	UNC	0.2160	3	2B	0.220	3.150	1.063	C96112	C86112
12-28	UNF	0.2160	3	2B	0.220	3.150	1.063	C96113	C86113
1/4-20	UNC	0.2500	3	2B	0.255	3.150	1.260	C96114	C86114
1/4-28	UNF	0.2500	3	2B	0.255	3.150	1.260	C96115	C86115
5/16-18	UNC	0.3125	3	2B	0.318	3.543	1.378	C96116	C86116
5/16-24	UNF	0.3125	3	2B	0.318	3.543	1.378	C96117	C86117
3/8-16	UNC	0.3750	3	2B	0.381	3.937	1.732	C96118	C86118
3/8-24	UNF	0.3750	3	2B	0.381	3.937	1.732	C96119	C86119
7/16-14	UNC	0.4375	3	2B	0.323	3.937	1.614	C96120	C86120
7/16-20	UNF	0.4375	3	2B	0.323	3.937	1.614	C96121	C86121
1/2-13	UNC	0.5000	3	2B	0.367	4.331	1.535	C96122	C86122
1/2-20	UNF	0.5000	3	2B	0.367	4.331	1.535	C96123	C86123
9/16-12	UNC	0.5625	3	2B	0.429	4.331	1.772	C96124	C86124
9/16-18	UNF	0.5625	3	2B	0.429	4.331	1.772	C96125	C86125
5/8-11	UNC	0.6250	3	2B	0.480	4.331	2.087	C96126	C86126
5/8-18	UNF	0.6250	3	2B	0.480	4.331	2.087	C96127	C86127
3/4-10	UNC	0.7500	4	2B	0.590	4.921	2.205	C96128	C86128
3/4-16	UNF	0.7500	4	2B	0.590	4.921	2.205	C96129	C86129
7/8-9	UNC	0.8750	4	2B	0.697	5.512	2.362	C96130	C86130
7/8-14	UNF	0.8750	4	2B	0.697	5.512	2.362	C96131	C86131
1-8	UNC	1.0000	4	2B	0.800	6.299	2.520	C96132	C86132
1-12	UNF	1.0000	4	2B	0.800	6.299	2.520	C96133	C86133

continued on next page

tap size and pitch	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter		overall length L		thread length I		order number	
					in	mm	in	mm	in	mm	Black Oxide PRO-961SP	TiAIN PRO-861SP
M3x0.5	M	0.1181	3	6H	0.141	3.58	2.205	56	0.748	19	C96134	C86134
M3.5x0.6	M	0.1378	3	6H	0.141	3.58	2.205	56	0.787	20	C96135	C86135
M4x0.7	M	0.1575	3	6H	0.168	4.27	2.480	63	0.827	21	C96136	C86136
M5x0.8	M	0.1969	3	6H	0.194	4.93	2.756	70	1.024	26	C96137	C86137
M6x1	M	0.2362	3	6H	0.255	6.48	3.150	80	1.260	32	C96138	C86138
M7x1	M	0.2756	3	6H	0.318	8.08	3.150	80	1.181	30	C96139	C86139
M8x1	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C96140	C86140
M8x1.25	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C96141	C86141
M10x1.25	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C96142	C86142
M10x1.5	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C96143	C86143
M12x1.25	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C96144	C86144
M12x1.75	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C96145	C86145
M14x1.5	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C96146	C86146
M14x2	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C96147	C86147
M16x1.5	M	0.6299	3	6H	0.480	12.19	4.331	110	2.087	53	C96148	C86148
M16x2	M	0.6299	3	6H	0.480	12.19	4.331	110	2.087	53	C96149	C86149
M18x1.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C96150	C86150
M18x2.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C96151	C86151

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Black Oxide	◆			◆		◆	◆	◆	◆				
TiAIN	☆			☆		☆	☆	☆	☆				

☆ = Best Performance ◆ = Acceptable

Note
Tapping Speeds and Feeds
begin on page 196.

HSS-E

DIN with
ASME
SHANK

Spiral
Point

Straight Flute


Thru Holes

Plug 3-5

Surface
Treatment

Black
Oxide

Hardlube

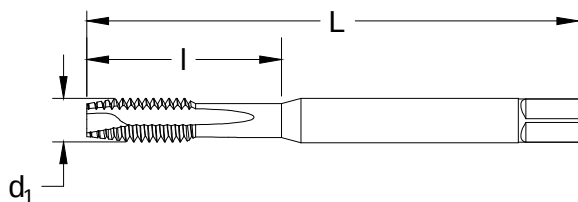

Feature:

Premium steel substrate, for use in a wide array of materials.

tap size and pitch d ₁	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter	overall length L (in)	thread length I (in)	order number	
								Black Oxide PER-862SP	Hardlube PER-960SP
2-56	UNC	0.0860	3	2B	0.141	1.772	0.551	C86201	C96001
3-48	UNC	0.0990	3	2B	0.141	1.969	0.591	C86202	C96002
4-40	UNC	0.1120	3	2B	0.141	2.205	0.669	C86203	C96003
4-48	UNF	0.1120	3	2B	0.141	2.205	0.669	C86204	C96004
5-40	UNC	0.1250	3	2B	0.141	2.205	0.748	C86205	C96005
6-32	UNC	0.1380	3	2B	0.141	2.205	0.787	C86206	C96006
6-40	UNF	0.1380	3	2B	0.141	2.205	0.787	C86207	C96007
8-32	UNC	0.1640	3	2B	0.168	2.480	0.827	C86208	C96008
8-36	UNF	0.1640	3	2B	0.168	2.480	0.827	C86209	C96009
10-24	UNC	0.1900	3	2B	0.194	2.756	1.024	C86210	C96010
10-32	UNF	0.1900	3	2B	0.194	2.756	1.024	C86211	C96011
12-24	UNC	0.2160	3	2B	0.220	3.150	1.063	C86212	C96012
12-28	UNF	0.2160	3	2B	0.220	3.150	1.063	C86213	C96013
1/4-20	UNC	0.2500	3	2B	0.255	3.150	1.260	C86214	C96014
1/4-28	UNF	0.2500	3	2B	0.255	3.150	1.260	C86215	C96015
5/16-18	UNC	0.3125	3	2B	0.318	3.543	1.378	C86216	C96016
5/16-24	UNF	0.3125	3	2B	0.318	3.543	1.378	C86217	C96017
3/8-16	UNC	0.3750	3	2B	0.381	3.937	1.732	C86218	C96018
3/8-24	UNF	0.3750	3	2B	0.381	3.937	1.732	C86219	C96019
7/16-14	UNC	0.4375	3	2B	0.323	3.937	1.614	C86220	C96020
7/16-20	UNF	0.4375	3	2B	0.323	3.937	1.614	C86221	C96021
1/2-13	UNC	0.5000	3	2B	0.367	4.331	1.535	C86222	C96022
1/2-20	UNF	0.5000	3	2B	0.367	4.331	1.535	C86223	C96023
9/16-12	UNC	0.5625	3	2B	0.429	4.331	1.772	C86224	C96024
9/16-18	UNF	0.5625	3	2B	0.429	4.331	1.772	C86225	C96025
5/8-11	UNC	0.6250	3	2B	0.480	4.331	2.087	C86226	C96026
5/8-18	UNF	0.6250	3	2B	0.480	4.331	2.087	C86227	C96027
3/4-10	UNC	0.7500	4	2B	0.590	4.921	2.205	C86228	C96028
3/4-16	UNF	0.7500	4	2B	0.590	4.921	2.205	C86229	C96029
7/8-9	UNC	0.8750	4	2B	0.697	5.512	2.362	C86230	C96030
7/8-14	UNF	0.8750	4	2B	0.697	5.512	2.362	C86231	C96031
1-8	UNC	1.0000	4	2B	0.800	6.299	2.520	C86232	C96032
1-12	UNF	1.0000	4	2B	0.800	6.299	2.520	C86233	C96033

continued on next page

tap size and pitch d₁	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter		overall length L		thread length I		order number	
					in	mm	in	mm	in	mm	Black Oxide PER-862SP	Hardlube PER-960SP
M3x0.5	M	0.1181	3	6H	0.141	3.58	2.205	56	0.748	19	C86234	C96034
M3.5x0.6	M	0.1378	3	6H	0.141	3.58	2.205	56	0.787	20	C86235	C96035
M4x0.7	M	0.1575	3	6H	0.168	4.27	2.480	63	0.827	21	C86236	C96036
M5x0.8	M	0.1969	3	6H	0.194	4.93	2.756	70	1.024	26	C86237	C96037
M6x1	M	0.2362	3	6H	0.255	6.48	3.150	80	1.260	32	C86238	C96038
M7x1	M	0.2756	3	6H	0.318	8.08	3.150	80	1.181	30	C86239	C96039
M8x1	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C86240	C96040
M8x1.25	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C86241	C96041
M10x1.25	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C86242	C96042
M10x1.5	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C86243	C96043
M12x1.25	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C86244	C96044
M12x1.75	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C86245	C96045
M14x1.5	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C86246	C96046
M14x2	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C86247	C96047
M16x1.5	M	0.6299	3	6H	0.480	12.19	4.331	110	2.087	53	C86248	C96048
M16x2	M	0.6299	3	6H	0.480	12.19	4.331	110	2.087	53	C86249	C96049
M18x1.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C86250	C96050
M18x2.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C86251	C96051

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Black Oxide	★			★		★	★	★	★				
Hardlube	☆	★		☆	★	☆	☆	☆	☆				

☆ = Best Performance ★ = Acceptable

General Purpose - Inch High-Spiral

Styles: **1093**, **1093-TN**, **1094**, **1094-TN**




Note

Tapping Speeds and Feeds
begin on page 196.

HSS



Surface
Treatment

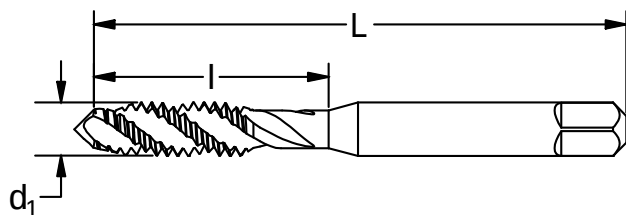

tap size and pitch d_1	thread form	decimal equiv.	no. of flutes	H- limit	overall length L (in)	thread length I (in)	order number			
							Plug		Bottoming	
							1093 Bright	1093-TN TiN	1094 Bright	1094-TN TiN
4-40	UNC	.1120	2	H2	1.875	.563	C58515	—	C58516	C55566
6-32	UNC	.1380	2	H3	2.000	.688	C58532	C55571	C58533	C55570
8-32	UNC	.1640	3	H3	2.125	.750	C58538	C55573	C58539	C55572
10-24	UNC	.1900	3	H3	2.375	.875	C58544	C55575	C58545	—
10-32	UNF	.1900	3	H3	2.375	.875	C58546	C55577	C58547	C55576
1/4-20	UNC	.2500	3	H3	2.500	1.000	C58562	—	C58563	—
1/4-28	UNF	.2500	3	H3	2.500	1.000	C58564	—	C58565	—
5/16-18	UNC	.3125	3	H3	2.719	1.125	C58570	—	C58571	—
5/16-24	UNF	.3125	3	H3	2.719	1.125	C58572	—	C58573	—
3/8-16	UNC	.3750	3	H3	2.938	1.250	C58581	—	C58582	—
3/8-24	UNF	.3750	3	H3	2.938	1.250	C58583	—	C58584	—
1/2-13	UNC	.5000	3	H3	3.375	1.656	C58613	—	C58614	—
1/2-20	UNF	.5000	3	H3	3.375	1.656	C58615	—	C58616	—

General Purpose - Metric High-Spiral

Styles: **1093**, **1093-TC**, **1094**, **1094-TC**

tap size and pitch d_1	decimal equiv.	no. of flutes	D- limit	overall length L		thread length I		order number			
				in	mm	in	mm	Plug		Bottoming	
								1093 Bright	1093-TC TiCN	1094 Bright	1094-TC TiCN
M3 x 0.5	.1181	2	D3	1.938	49.21	.625	15.88	C58800	—	C58801	C58901
M4 x 0.7	.1575	3	D4	2.125	53.98	.750	19.05	C58804	C58904	C58805	C58905
M5 x 0.8	.1969	3	D4	2.375	60.33	.875	22.23	C58806	C58906	C58807	C58907
M6 x 1.0	.2362	3	D5	2.500	63.50	1.000	25.40	C58808	C58908	C58809	C58909
M8 x 1.25	.3150	3	D5	2.719	69.06	1.125	28.58	C58810	C58910	C58811	C58911
M10 x 1.5	.3937	3	D8	2.938	74.61	1.250	31.75	C58812	C58912	C58813	C58913
M12x1.75	.4724	3	D6	3.375	85.73	1.656	42.07	—	—	C58815	—

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
	Bright	★		★						☆			
	TiN	☆		☆		☆							
	TiCN	☆		☆		☆				☆			


☆ = Best Performance ★ = Acceptable

Styles: 1095, 1096
Heavy Duty CNC
Note

Tapping Speeds and Feeds
begin on page 196.

HSS


Surface
Treatment

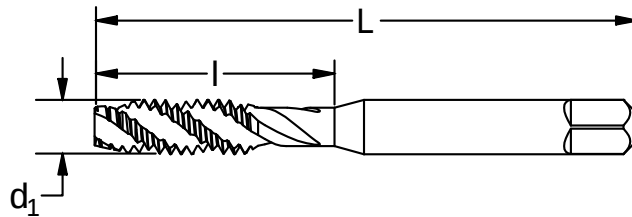Black
Oxide


tap size and pitch d_1	thread form	decimal equiv.	no of flutes	H- limit	overall length L (in)	thread length I (in)	order number	
							1095 Plug	1096 Bottoming
6-32	UNC	.1380	2	H3	2.000	.688	C58432	C58433
8-32	UNC	.1640	3	H3	2.125	.750	C58434	C58435
10-24	UNC	.1900	3	H3	2.375	.875	C58436	C58437
10-32	UNF	.1900	3	H3	2.375	.875	C58438	C58439
1/4-20	UNC	.2500	3	H3	2.500	1.000	C58440	C58441
1/4-28	UNF	.2500	3	H3	2.500	1.000	C58442	C58443
5/16-18	UNC	.3125	3	H3	2.719	1.125	C58444	C58445
5/16-24	UNF	.3125	3	H3	2.719	1.125	—	C58447
3/8-16	UNC	.3750	3	H3	2.938	1.250	C58448	C58449
3/8-24	UNF	.3750	3	H3	2.938	1.250	C58450	C58451
1/2-13	UNC	.5000	3	H3	3.375	1.656	C58452	C58453

Spiral Flute

High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Black Oxide	☆		☆					☆	◆				
☆ = Best Performance ◆ = Acceptable													

Stainless Steel & Steels Inch - SD Powder Metal




Style: **B-101**

Note
Tapping Speeds and Feeds
begin on page 196.

HSS-E



Surface
Treatment

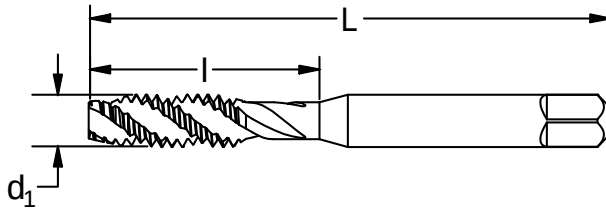


tap size and pitch d_1	thread form	decimal equiv.	number of flutes	H- limit	overall length L (in)	thread length I (in)	order no. B-101
10-32	UNF	.1900	3	H3	2.375	.875	C27897
1/4-20	UNC	.2500	3	H3	2.500	1.000	C27898
1/4-20	UNC	.2500	3	H5	2.500	1.000	C27921
5/16-18	UNC	.3125	3	H3	2.719	1.125	C27900
5/16-18	UNC	.3125	3	H5	2.719	1.125	C27922
3/8-16	UNC	.3750	3	H3	2.938	1.250	C27902
3/8-16	UNC	.3750	3	H5	2.938	1.250	C27923
1/2-13	UNC	.5000	3	H3	3.375	1.656	C27906
1/2-13	UNC	.5000	3	H5	3.375	1.656	C27926
1/2-20	UNF	.5000	3	H5	3.375	1.656	C27927
5/8-11	UNC	.6250	4	H3	3.813	1.813	C27910
5/8-11	UNC	.6250	4	H5	3.813	1.813	C27928

Stainless Steels & Steels Metric - SD Powder Metal

Style: **B-101**

tap size and pitch d_1	decimal equiv.	number of flutes	D- limit	overall length L		thread length I		order no. B-101
				in	mm	in	mm	
M4x0.7	.1575	3	D4	2.125	53.98	.750	19.05	C27930
M5x0.8	.1968	3	D4	2.375	60.33	.875	22.23	C27931
M6x1	.2362	3	D5	2.500	63.50	1.000	25.4	C27932
M8x1.25	.3150	3	D5	2.719	69.06	1.125	28.58	C27933
M10x1.5	.3937	3	D6	2.938	74.61	1.250	31.75	C27934
M12x1.75	.4724	3	D6	3.375	85.73	1.656	42.06	C27935

Made To Order
Taps Available




Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				>45
Hardness													
Black Oxide	☆		☆		☆	☆	◆	◆	◆				

☆ = Best Performance ◆ = Acceptable

Note
Tapping Speeds and Feeds
begin on page 196.



Surface
Treatment

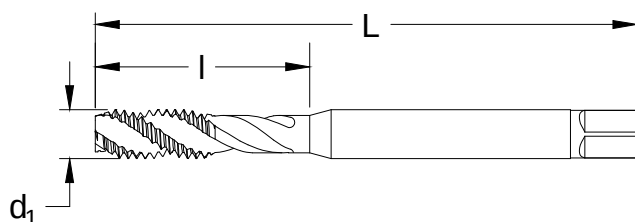

tap size and pitch d_1 (in)	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter	overall length L (in)	thread length I (in)	order number	
								Black Oxide PRO-981SF	TiAlN PRO-892SF
2-56	UNC	0.0860	3	2B	0.141	1.772	0.551	C98101	C89201
3-48	UNC	0.0990	3	2B	0.141	1.969	0.591	C98102	C89202
4-40	UNC	0.1120	3	2B	0.141	2.205	0.669	C98103	C89203
4-48	UNF	0.1120	3	2B	0.141	2.205	0.669	C98104	C89204
5-40	UNC	0.1250	3	2B	0.141	2.205	0.748	C98105	C89205
6-32	UNC	0.1380	3	2B	0.141	2.205	0.787	C98106	C89206
6-40	UNF	0.1380	3	2B	0.141	2.205	0.787	C98107	C89207
8-32	UNC	0.1640	3	2B	0.168	2.480	0.827	C98108	C89208
8-36	UNF	0.1640	3	2B	0.168	2.480	0.827	C98109	C89209
10-24	UNC	0.1900	3	2B	0.194	2.756	1.024	C98110	C89210
10-32	UNF	0.1900	3	2B	0.194	2.756	1.024	C98111	C89211
12-24	UNC	0.2160	3	2B	0.220	3.150	1.063	C98112	C89212
12-28	UNF	0.2160	3	2B	0.220	3.150	1.063	C98113	C89213
1/4-20	UNC	0.2500	3	2B	0.255	3.150	1.260	C98114	C89214
1/4-28	UNF	0.2500	3	2B	0.255	3.150	1.260	C98115	C89215
5/16-18	UNC	0.3125	3	2B	0.318	3.543	1.378	C98116	C89216
5/16-24	UNF	0.3125	3	2B	0.318	3.543	1.378	C98117	C89217
3/8-16	UNC	0.3750	3	2B	0.381	3.937	1.732	C98118	C89218
3/8-24	UNF	0.3750	3	2B	0.381	3.937	1.732	C98119	C89219
7/16-14	UNC	0.4375	3	2B	0.323	3.937	1.614	C98120	C89220
7/16-20	UNF	0.4375	3	2B	0.323	3.937	1.614	C98121	C89221
1/2-13	UNC	0.5000	3	2B	0.367	4.331	1.535	C98122	C89222
1/2-20	UNF	0.5000	3	2B	0.367	4.331	1.535	C98123	C89223
9/16-12	UNC	0.5625	4	2B	0.429	4.331	1.772	C98124	C89224
9/16-18	UNF	0.5625	4	2B	0.429	4.331	1.772	C98125	C89225
5/8-11	UNC	0.6250	4	2B	0.480	4.331	2.087	C98126	C89226
5/8-18	UNF	0.6250	4	2B	0.480	4.331	2.087	C98127	C89227
3/4-10	UNC	0.7500	4	2B	0.590	4.921	2.205	C98128	C89228
3/4-16	UNF	0.7500	4	2B	0.590	4.921	2.205	C98129	C89229
7/8-9	UNC	0.8750	4	2B	0.697	5.512	2.362	C98130	C89230
7/8-14	UNF	0.8750	4	2B	0.697	5.512	2.362	C98131	C89231
1-8	UNC	1.0000	4	2B	0.800	6.299	2.520	C98132	C89232
1-12	UNF	1.0000	4	2B	0.800	6.299	2.520	C98133	C89233

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Black Oxide	★		★		★	★		★	★				
TiAlN	☆		☆		☆	☆		☆	☆				

☆ = Best Performance ★ = Acceptable

tap size and pitch d ₁	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter		overall length L		thread length I		order number	
					in	mm	in	mm	in	mm	Black Oxide PRO-981SF	TiAIN PRO-892SF
M3x0.5	M	0.1181	3	6H	0.141	3.58	2.205	56	0.748	19	C98134	C89234
M3.5x0.6	M	0.1378	3	6H	0.141	3.58	2.205	56	0.787	20	C98135	C89235
M4x0.7	M	0.1575	3	6H	0.168	4.27	2.480	63	0.827	21	C98136	C89236
M5x0.8	M	0.1969	3	6H	0.194	4.93	2.756	70	1.024	26	C98137	C89237
M6x1	M	0.2362	3	6H	0.255	6.48	3.150	80	1.260	32	C98138	C89238
M7x1	M	0.2756	3	6H	0.318	8.08	3.150	80	1.181	30	C98139	C89239
M8x1	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C98140	C89240
M8x1.25	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C98141	C89241
M10x1.25	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C98142	C89242
M10x1.5	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C98143	C89243
M12x1.25	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C98144	C89244
M12x1.75	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C98145	C89245
M14x1.5	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C98146	C89246
M14x2	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C98147	C89247
M16x1.5	M	0.6299	4	6H	0.480	12.19	4.331	110	2.087	53	C98148	C89248
M16x2	M	0.6299	4	6H	0.480	12.19	4.331	110	2.087	53	C98149	C89249
M18x1.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C98150	C89250
M18x2.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C98151	C89251
M20x2.5	M	0.7874	4	6H	0.650	16.51	5.512	140	2.480	63	C98152	C89252
M22x2.5	M	0.8661	4	6H	0.697	17.70	5.512	140	2.362	60	C98153	C89253
M24x3.0	M	0.9449	4	6H	0.760	19.30	6.299	160	2.598	66	C98154	C89254


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Black Oxide	★			★		★	★	★	★				
TiAIN	☆			☆		☆	☆	☆	☆				

☆ = Best Performance ★ = Acceptable

Note
Tapping Speeds and Feeds
begin on page 196.



Surface Treatment

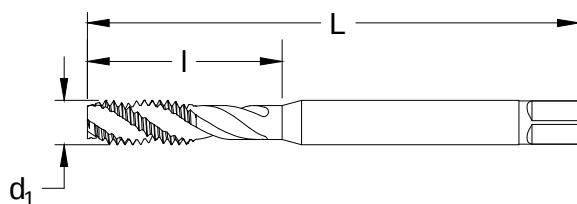

tap size and pitch d ₁ (in)	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter	overall length L (in)	thread length I (in)	order number	
								Black Oxide PER-893SF	Hardlube PER-980SF
2-56	UNC	0.0860	3	2B	0.141	1.772	0.551	C89301	C98001
3-48	UNC	0.0990	3	2B	0.141	1.969	0.591	C89302	C98002
4-40	UNC	0.1120	3	2B	0.141	2.205	0.669	C89303	C98003
4-48	UNF	0.1120	3	2B	0.141	2.205	0.669	C89304	C98004
5-40	UNC	0.1250	3	2B	0.141	2.205	0.748	C89305	C98005
6-32	UNC	0.1380	3	2B	0.141	2.205	0.787	C89306	C98006
6-40	UNF	0.1380	3	2B	0.141	2.205	0.787	C89307	C98007
8-32	UNC	0.1640	3	2B	0.168	2.480	0.827	C89308	C98008
8-36	UNF	0.1640	3	2B	0.168	2.480	0.827	C89309	C98009
10-24	UNC	0.1900	3	2B	0.194	2.756	1.024	C89310	C98010
10-32	UNF	0.1900	3	2B	0.194	2.756	1.024	C89311	C98011
12-24	UNC	0.2160	3	2B	0.220	3.150	1.063	C89312	C98012
12-28	UNF	0.2160	3	2B	0.220	3.150	1.063	C89313	C98013
1/4-20	UNC	0.2500	3	2B	0.255	3.150	1.260	C89314	C98014
1/4-28	UNF	0.2500	3	2B	0.255	3.150	1.260	C89315	C98015
5/16-18	UNC	0.3125	3	2B	0.318	3.543	1.378	C89316	C98016
5/16-24	UNF	0.3125	3	2B	0.318	3.543	1.378	C89317	C98017
3/8-16	UNC	0.3750	3	2B	0.381	3.937	1.732	C89318	C98018
3/8-24	UNF	0.3750	3	2B	0.381	3.937	1.732	C89319	C98019
7/16-14	UNC	0.4375	3	2B	0.323	3.937	1.614	C89320	C98020
7/16-20	UNF	0.4375	3	2B	0.323	3.937	1.614	C89321	C98021
1/2-13	UNC	0.5000	3	2B	0.367	4.331	1.535	C89322	C98022
1/2-20	UNF	0.5000	3	2B	0.367	4.331	1.535	C89323	C98023
9/16-12	UNC	0.5625	4	2B	0.429	4.331	1.772	C89324	C98024
9/16-18	UNF	0.5625	4	2B	0.429	4.331	1.772	C89325	C98025
5/8-11	UNC	0.6250	4	2B	0.480	4.331	2.087	C89326	C98026
5/8-18	UNF	0.6250	4	2B	0.480	4.331	2.087	C89327	C98027
3/4-10	UNC	0.7500	4	2B	0.590	4.921	2.205	C89328	C98028
3/4-16	UNF	0.7500	4	2B	0.590	4.921	2.205	C89329	C98029
7/8-9	UNC	0.8750	4	2B	0.697	5.512	2.362	C89330	C98030
7/8-14	UNF	0.8750	4	2B	0.697	5.512	2.362	C89331	C98031
1-8	UNC	1.0000	4	2B	0.800	6.299	2.520	C89332	C98032
1-12	UNF	1.0000	4	2B	0.800	6.299	2.520	C89333	C98033

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	★	★	★	★	★	★	★	★	★				★
Black Oxide	★	★	★	★	★	★	★	★	★				
Hardlube	★	★	★	★	★	★	★	★	★				

★ = Best Performance ♦ = Acceptable

tap size and pitch d₁	thread form	decimal equiv.	no. of flutes	class of fit	shank diameter		overall length L		thread length l		order number	
					in	mm	in	mm	in	mm	Black Oxide PER-893SF	Hardlube PER-980SF
M3x0.5	M	0.1181	3	6H	0.141	3.58	2.205	56	0.748	19	C89334	C98034
M3.5x0.6	M	0.1378	3	6H	0.141	3.58	2.205	56	0.787	20	C89335	C98035
M4x0.7	M	0.1575	3	6H	0.168	4.27	2.480	63	0.827	21	C89336	C98036
M5x0.8	M	0.1969	3	6H	0.194	4.93	2.756	70	1.024	26	C89337	C98037
M6x1	M	0.2362	3	6H	0.255	6.48	3.150	80	1.260	32	C89338	C98038
M7x1	M	0.2756	3	6H	0.318	8.08	3.150	80	1.181	30	C89339	C98039
M8x1	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C89340	C98040
M8x1.25	M	0.3150	3	6H	0.318	8.08	3.543	90	1.378	35	C89341	C98041
M10x1.25	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C89342	C98042
M10x1.5	M	0.3937	3	6H	0.381	9.68	3.937	100	1.575	40	C89343	C98043
M12x1.25	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C89344	C98044
M12x1.75	M	0.4724	3	6H	0.367	9.32	4.331	110	1.575	40	C89345	C98045
M14x1.5	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C89346	C98046
M14x2	M	0.5512	3	6H	0.429	10.9	4.331	110	1.772	45	C89347	C98047
M16x1.5	M	0.6299	4	6H	0.480	12.19	4.331	110	2.087	53	C89348	C98048
M16x2	M	0.6299	4	6H	0.480	12.19	4.331	110	2.087	53	C89349	C98049
M18x1.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C89350	C98050
M18x2.5	M	0.7087	4	6H	0.542	13.77	4.921	125	2.165	55	C89351	C98051
M20x2.5	M	0.7874	4	6H	0.650	16.51	5.512	140	2.480	63	C89352	C98052
M22x2.5	M	0.8661	4	6H	0.697	17.70	5.512	140	2.362	60	C89353	C98053
M24x3.0	M	0.9449	4	6H	0.760	19.30	6.299	160	2.598	66	C89354	C98054


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Black Oxide	★		★		★	★		★	★				
Hardlube	☆	★	☆	★	☆	☆	☆	☆	☆				

☆ = Best Performance ★ = Acceptable

Styles: 1091, 1092
General Purpose
Inch

Note

Modify tapping speeds listed on page 133-134 as follows: double the speeds versus thread cutting taps.

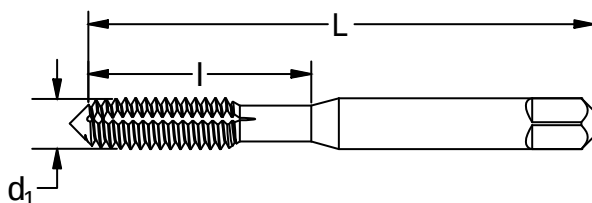
Surface Treatment
Bright


tap size and pitch d₁	thread form	decimal equiv.	H-limit	overall length L (in)	thread length I (in)	order number	
						1091 Plug	1092 Bottoming
*0-80	UNF	.0600	H2	1.625	.313	—	C59159
*2-56	UNC	.0860	H2	1.750	.438	—	C59177
4-40	UNC	.1120	H3	1.875	.563	C59193	C59194
5-40	UNC	.1250	H3	1.938	.625	C59209	C59210
6-32	UNC	.1380	H3	2.000	.688	C59221	C59222
6-32	UNC	.1380	H5	2.000	.688	C59223	C59224
8-32	UNC	.1640	H3	2.125	.750	C59235	C59236
8-32	UNC	.1640	H5	2.125	.750	C59237	C59238
10-24	UNC	.1900	H4	2.375	.875	C59249	C59250
10-24	UNC	.1900	H6	2.375	.875	C59251	C59252
10-32	UNF	.1900	H4	2.375	.875	C59256	C59257
10-32	UNF	.1900	H6	2.375	.875	C59258	C59259
1/4-20	UNC	.2500	H4	2.500	1.000	C59282	C59283
1/4-20	UNC	.2500	H6	2.500	1.000	C59284	C59285
1/4-28	UNF	.2500	H4	2.500	1.000	C59289	C59290
5/16-18	UNC	.3125	H5	2.719	1.125	C59299	C59300
5/16-18	UNC	.3125	H7	2.719	1.125	C59301	C59302
3/8-16	UNC	.3750	H7	2.938	1.250	C59317	C59318
3/8-24	UNF	.3750	H5	2.938	1.250	C59321	—
3/8-24	UNF	.3750	H7	2.938	1.250	C59323	—
1/2-13	UNC	.5000	H8	3.375	1.656	C59361	C59362

*#0-#2: 302 blank style

Styles: 1091, 1092
General Purpose
Metric

tap size and pitch d₁	decimal equiv.	D-limit	overall length L		thread length I		order number	
			in	mm	in	mm	1091 Plug	1092 Bottoming
M3 x 0.5	.1181	D5	1.938	49.21	.625	15.88	C59420	C59421
M4 x 0.7	.1575	D6	2.125	53.98	.750	19.05	C59424	C59425
M5 x 0.8	.1968	D7	2.375	60.33	.875	22.23	C59428	C59429
M6 x 1	.2362	D8	2.500	63.50	1.000	25.40	C59432	C59433
M8 x 1.25	.3150	D9	2.719	69.06	1.125	28.58	C59436	C59437
M10 x 1.5	.3937	D10	2.938	74.61	1.250	31.75	C59440	C59441


Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright	☆		☆		☆					☆			

☆ = Best Performance ◆ = Acceptable

Note
Tapping Speeds and Feeds
begin on page 196.



Surface
Treatment

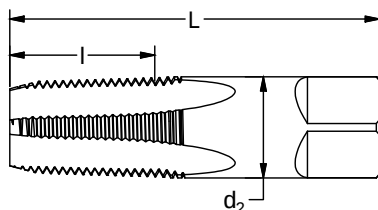

order number

tap size and pitch	decimal equiv.	# of flutes	shank diameter d ₂ (in)	overall length l ₁ (in)	thread length l ₂ (in)	order number			
						Bright		TiN	
						965B NPT	975 NPTF	965TN NPT	975TN NPTF
1/16-27	.0625	4	.3125	2.125	.688	C64036	C64058	C56700	C55680
1/8-27*	.1250	4	.3125	2.125	.750	C64037	C64059	C56701	—
1/8-27	.1250	4	.4375	2.125	.750	C64038	C64060	C56702	C55682
1/4-18	.2500	4	.5625	2.438	1.063	C64039	C64061	C56703	C55683
3/8-18	.3750	4	.7000	2.563	1.063	C64040	C64062	C56704	C55684
1/2-14	.5000	4	.6875	3.125	1.375	C64041	C64063	C56705	C55685
3/4-14	.7500	5	.9063	3.250	1.375	C64042	C64064	C56706	C55686
1-11-1/2	1.0000	5	1.1250	3.750	1.750	C64043	C64065	—	C55687
1-1/4-11-1/2	1.2500	5	1.3125	4.000	1.750	C64044	—	—	—
1-1/2-11-1/2	1.5000	7	1.5000	4.250	1.750	C64045	—	—	—
2-11-1/2	2.0000	7	1.8750	4.500	1.750	C64046	—	—	—


* small shank

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
Bright	☆		☆					◆	◆				
TiN													

☆ = Best Performance ◆ = Acceptable

Styles: 964B, 966B
NPT/NPTF Interrupted Thread Taper
Note
Tapping Speeds and Feeds begin on page 196.

HSS

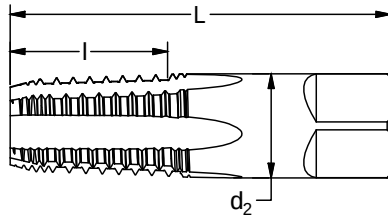
Surface Treatment


tap size and pitch	decimal equiv.	no. of flutes	shank diameter d_2 (in)	overall length L (in)	thread length I (in)	order number	
						Bright 964B NPT	Bright 966B NPTF
1/8-27*	.1250	5	.3125	2.125	.750	—	C64107
1/8-27	.1250	5	.4375	2.125	.750	C64098	C64108
1/4-18	.2500	5	.5625	2.438	1.063	C64099	C64109
3/8-18	.3750	5	.7000	2.563	1.063	C64100	C64110
1/2-14	.5000	5	.6875	3.125	1.375	C64101	C64111
3/4-14	.7500	5	.9063	3.250	1.375	C64102	C64112
1 – 11-1/2	1.0000	5	1.1250	3.750	1.750	C64103	—

* small shank

Pipe Tap
High Speed Steel

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆				☆	☆				

☆ = Best Performance ◆ = Acceptable

Note


Tapping Speeds and Feeds
begin on page 196.

HSS



NPS

NPSF
Dryseal

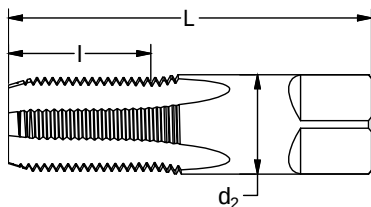Surface
Treatment


tap size and pitch	decimal equiv.	no. of flutes	shank diameter d_2 (in)	overall length L (in)	thread length I (in)	order number	
						963B NPS	967B NPSF
1/8-27*	.1250	4	.3125	2.125	.750	—	C64129
1/8-27	.1250	4	.4375	2.125	.750	C64116	C64130
1/4-18	.2500	4	.5625	2.438	1.063	C64117	C64131
3/8-18	.3750	4	.7000	2.563	1.063	C64118	C64132
1/2-14	.5000	4	.6875	3.125	1.375	C64119	C64133

* small shank

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆				◆	◆				

☆ = Best Performance

◆ = Acceptable

Style: CMTM2

Mini - Inch
2x Diameter

Note


Formula: $2 \times d_1$ ($l_2 \leq 2 \times \text{Thread Diameter}$)

* Bore diameter applies to the smallest thread diameter.

For Internal & External Threads

Carbide

Surface
Treatment

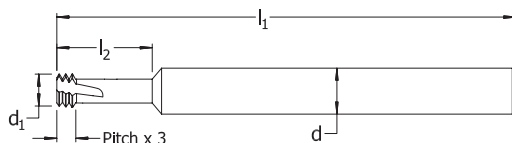

Feature:

Excel in internal deep threads in hard to cut materials.

American UN UNC	UNF	TPI	thread pitch	shank diameter d	cutting diameter d ₁	overall length l ₁	cut depth l ₂	pitch x 3 thread length	no. of flutes	no. of teeth	*bore dia.	order number CMTM2
	1-72	72	0.014	1/4	.057	2.5	.154	0.042	3	3	.060	C95102
1-64	2-64	64	0.016	1/4	.057	2.5	.165	0.047	3	3	.060	C95103
2-56	3-56	56	0.018	1/4	.065	2.5	.197	0.054	3	3	.069	C95104
3-48	4-48	48	0.021	1/4	.075	2.5	.236	0.063	3	3	.080	C95105
4, 5-40	6-40	40	0.025	1/4	.085	2.5	.236	0.075	3	3	.090	C95106
	8-36	36	0.028	1/4	.115	2.5	.343	0.083	3	3	.125	C95107
6, 8-32	10-32	32	0.031	1/4	.100	2.5	.292	0.094	3	3	.110	C95108
8-32	10-32	32	0.031	1/4	.120	2.5	.394	0.094	3	3	.130	C95109
	1/4"x28	28	0.036	1/4	.180	2.5	.520	0.107	3	3	.190	C95110
10-24	5/16"x24	24	0.042	1/4	.130	2.5	.400	0.125	3	3	.140	C95111
	5/16"x24	24	0.042	1/4	.240	2.5	.650	0.125	3	3	.255	C95112
1/4"x20	7/16"x20	20	0.05	1/4	.185	2.5	.530	0.150	3	3	.200	C95113
	7/16"x20	20	0.05	3/8	.340	3	.900	0.150	4	3	.355	C95114
3/8"x16		16	0.063	3/8	.290	3	.750	0.188	4	3	.307	C95115
7/16"x14		14	0.071	3/8	.340	3	.900	0.214	4	3	.355	C95116
1/2-13		13	0.077	3/8	.350	3	1.10	0.231	4	3	.415	C95117

Mini Thread Mills

Carbide

Style: CMTMM2

Mini - Metric
2x Diameter

Note

Formula: $2 \times d_1$ ($l_2 \leq 2 \times \text{Thread Diameter}$)

* Bore diameter applies to the smallest thread diameter.

For Internal & External Threads

Carbide

Surface
Treatment



ISO metric		pitch		shank diameter d	cutting diameter d ₁	overall length l ₁	cut depth l ₂	pitch x 3 thread length	no. of flutes	no. of teeth	*bore dia.	order number CMTMM2
M course	M fine	mm	inch	mm	mm	mm	mm	mm				
M1.6x0.35		0.35	0.014	3.175	1.193	63.5	3.56	1.07	3	3	.050	C95127
M2x0.4		0.40	0.016	6.350	1.524	63.5	4.19	1.22	3	3	.065	C95128
M2.2x0.45		0.45	0.018	6.350	1.651	63.5	4.57	1.37	3	3	.070	C95129
M2.5x0.45		0.45	0.018	6.350	1.905	63.5	5.08	1.37	3	3	.080	C95130
M3x0.5	M3.5-M16x0.5	0.50	0.020	6.350	2.286	63.5	6.22	1.52	3	3	.095	C95131
M3.5x0.6		0.60	0.024	6.350	2.667	63.5	7.24	1.83	3	3	.111	C95132
M4x0.7		0.70	0.028	6.350	3.048	63.5	8.26	2.13	3	3	.126	C95133
M5x0.8		0.80	0.031	6.350	3.937	63.5	10.16	2.36	3	3	.161	C95134
M6x1.0	M8-M40x1.0	1.00	0.039	6.350	4.699	63.5	12.70	2.97	3	3	.193	C95135
M8x1.25		1.25	0.049	6.350	6.223	63.5	16.51	3.73	3	3	.257	C95136
M10x1.5	M12-M48x1.50	1.50	0.059	9.525	8.382	76.2	20.32	4.49	3	3	.343	C95137
M12x1.75		1.75	0.069	9.525	9.144	76.2	25.40	5.26	4	3	.395	C95138

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						>45
AlCrN		★	☆	★	☆	☆	☆	☆	★	★	★	☆	☆

☆ = Best Performance ★ = Acceptable

Mini - Inch 3x Diameter

Style: **CMTM3**



Note


Formula: $3 \times d_1$ ($l_2 \leq 3 \times \text{Thread Diameter}$)

* Bore diameter applies to the smallest thread diameter.

For Internal & External Threads

Carbide

Surface Treatment

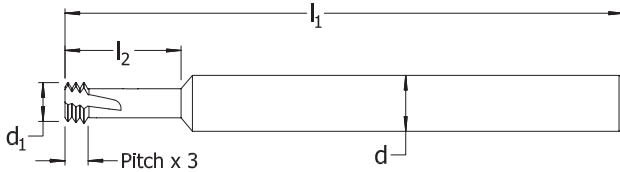

American UN		TPI	thread pitch	shank diameter d	cutting diameter d ₁	overall length l ₁	cut depth l ₂	pitch x 3 thread length	no. of flutes	no. of teeth	*bore dia.	order number
UNC	UNF											CMTM3
	1-72	72	0.014	1/4	.057	2.5	.240	0.042	3	3	.060	C95118
2-56	3-56	56	0.018	1/4	.065	2.5	.260	0.054	3	3	.069	C95119
4, 5-40	6-40	40	0.025	1/4	.085	2.5	.310	0.075	3	3	.090	C95120
5-40	6-40	40	0.025	1/4	.100	2.5	.400	0.075	3	3	.110	C95121
8-32	10-32	32	0.031	1/4	.120	2.5	.500	0.094	3	3	.130	C95122
	1/4"x28	28	0.036	1/4	.180	2.5	.750	0.107	3	3	.190	C95123
1/4"x20	7/16"x20	20	0.05	1/4	.185	2.5	.750	0.150	3	3	.200	C95124
	5/16"x24	24	0.042	1/4	.240	2.5	.940	0.125	3	3	.255	C95125
5/16"x18		18	0.056	1/4	.240	2.5	.900	0.167	3	3	.255	C95126

Mini - Metric 3x Diameter

Style: **CMTMM3**

Note

Formula: $3 \times d_1$ ($l_2 \leq 3 \times \text{Thread Diameter}$)

* Bore diameter applies to the smallest thread diameter.

For Internal & External Threads

Carbide

Surface Treatment



ISO metric		pitch		shank diameter d	cutting diameter d ₁	overall length l ₁	cut depth l ₂	pitch x 3 thread length	no. of flutes	no. of teeth	*bore dia.	order number
M course	M fine	mm	inch									CMTMM3
M1.6x0.35		0.35	0.014	3.175	1.938	63.5	5.00	1.07	3	3	.050	C95139
M2x0.4		0.40	0.016	6.350	1.524	63.5	6.22	1.22	3	3	.065	C95140
M2.5x0.45		0.45	0.018	6.350	1.905	63.5	6.99	1.37	3	3	.080	C95141
M3x0.5	M3.5-M16x0.5	0.50	0.020	6.350	2.286	63.5	9.149	1.52	3	3	.095	C95142
M4x0.7		0.70	0.028	6.350	3.048	63.5	12.45	2.13	3	3	.126	C95143
M5x0.8		0.80	0.031	6.350	3.937	63.5	15.49	2.36	3	3	.161	C95144
M6x1.0	M8-M40x1.0	1.00	0.039	6.350	4.699	63.5	18.42	2.97	3	3	.193	C95145
M8x1.25		1.25	0.049	6.350	6.223	63.5	21.64	3.73	3	3	.257	C95146


Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						>45
AICrN		★	☆	★	☆	☆	☆	☆	★	★	★	☆	☆

☆ = Best Performance ★ = Acceptable

Note
 For Internal & External Threads

 UNC
 UNF

Carbide

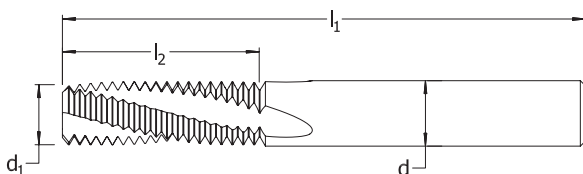 Surface
 Treatment

Feature:

Capable of producing right or left hand threads.

thread size	shank diameter d	cutting diameter d₁	overall length l₁	length of cut l₂	number of flutes	order number	
						CTM non-coolant	CTMC coolant-thru
6-32	1/8	.095	2	.218	3	C95000	—
8-32	1/8	.115	2	.250	3	C95001	—
8-36	1/8	.115	2	.250	3	C95002	—
10-24	3/16	.120	2	.312	3	C95003	—
10-32	3/16	.120	2	.312	3	C95004	—
1/4-20	3/16	.180	2-1/2	.500	3	C95005	C95026
1/4-28	3/16	.180	2-1/2	.500	3	C95006	C95027
5/16-18	1/4	.240	2-1/2	.625	3	C95007	C95028
5/16-24	1/4	.240	2-1/2	.625	3	C95008	C95029
3/8-16	5/16	.290	3	.750	4	C95009	C95030
3/8-24	5/16	.290	3	.750	4	C95010	C95031
7/16-14	3/8	.340	3	.875	4	C95011	C95032
7/16-20	3/8	.340	3	.875	4	C95012	C95033
1/2-13	3/8	.350	3-1/2	.875	4	C95013	C95034
1/2-20	3/8	.350	3-1/2	.875	4	C95014	—
9/16-12	1/2	.370	3-1/2	.875	4	C95015	C95035
9/16-18	1/2	.370	3-1/2	.875	4	C95016	C95036
5/8-11	1/2	.470	3-1/2	1.250	5	C95017	C95037
5/8-18	1/2	.470	3-1/2	1.250	5	C95018	C95038
3/4-10	1/2	.495	3-1/2	1.250	5	C95019	C95039
3/4-12	1/2	.495	3-1/2	1.250	5	C95020	C95040
3/4-16	1/2	.495	3-1/2	1.250	5	C95021	C95041
7/8-9	1/2	.495	3-1/2	1.250	5	C95022	C95042
7/8-14	1/2	.495	3-1/2	1.250	5	C95023	C95043
1-8	3/4	.620	4	1.375	5	C95024	C95044
1-12	3/4	.620	4	1.375	5	C95025	C95045

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
TiAlN	☆	☆	☆	☆	☆	☆	☆	☆	☆		☆	☆	☆

☆ = Best Performance ◆ = Acceptable

General Purpose Metric - Helical Thread Mills

Styles: **CTMM** Solid and **CTMMC** Coolant-Thru




Note
For Internal & External Threads

DIN

Carbide

Surface
Treatment

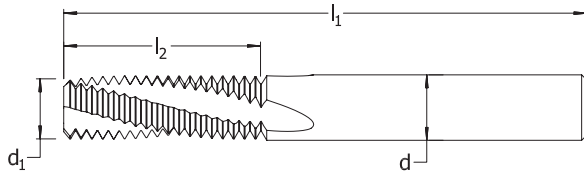

Feature:

Excellent option in difficult materials.

thread size	shank diameter d	cutting diameter d ₁	overall length l ₁	length of cut l ₂	number of flutes	order number	
						CTMM non-coolant	CTMMC coolant-thru
M4 X 0.70	1/8	.120	2	.250	2	C95072	—
M4.5 X 0.75	1/8	.120	2	.250	3	C95073	—
M5 X 0.80	3/16	.120	2	.312	3	C95074	C95088
M6 X 1.00	3/16	.170	2-1/2	.500	3	C95075	C95089
M8 X 0.75	1/4	.235	2-1/2	.625	3	C95076	C95090
M8 X 1.00	1/4	.235	2-1/2	.625	3	C95077	C95091
M8 X 1.25	1/4	.235	2-1/2	.625	3	C95078	C95092
M10 X 1.25	5/16	.300	3	.750	4	C95079	C95093
M10 X 1.50	5/16	.300	3	.750	4	C95080	C95094
M12 X 1.00	3/8	.360	3-1/2	.875	4	C95081	C95095
M12 X 1.25	3/8	.360	3-1/2	.875	4	C95082	C95096
M12 X 1.75	3/8	.360	3-1/2	.875	4	C95083	C95097
M14 X 1.50	3/8	.360	3-1/2	.875	4	C95084	C95098
M16 X 2.00	1/2	.470	3-1/2	1.250	5	C95085	C95099
M18 X 2.50	1/2	.470	3-1/2	1.250	5	C95086	C95100
M20 X 3.00	1/2	.470	3-1/2	1.250	5	C95087	C95101

National Pipe Tapered Inch - Helical Thread Mills


Styles: **CTMNP** Solid and **CTMNPC** Coolant-Thru

Note
For Internal & External Threads

NPT
NPTF

Carbide

Surface
Treatment

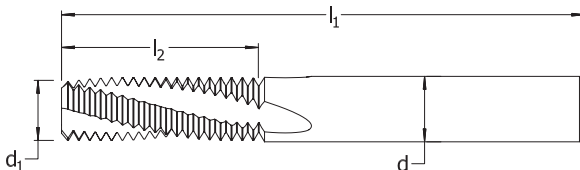

Feature:

Designed to cut internal and external threads.

thread size	shank diameter d	cutting diameter d ₁	overall length l ₁	length of cut l ₂	number of flutes	order number	
						CTMNP non-coolant	CTMNPC coolant-thru
1/16-27	1/4	.245	2-1/2	.437	3	C95046	C95051
1/8-27	5/16	.310	2-1/2	.437	4	C95047	C95052
1/4, 3/8-18	3/8	.305	3	.625	4	C95048	C95053
1/2, 3/4-14	1/2	.495	3-1/2	.875	4	C95049	C95054
1-11.5	3/4	.620	4	1.125	5	C95050	C95055

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				>45
	TiAlN	☆	★	☆	★	☆	☆	★	★		★	★	★

☆ = Best Performance ★ = Acceptable

Styles: CTMBPP Solid and CTMBPPC Coolant-Thru

British Pipe Tapered Inch - Helical Thread Mills


Note

For Internal & External Threads

BSPP

Carbide

Surface
Treatment

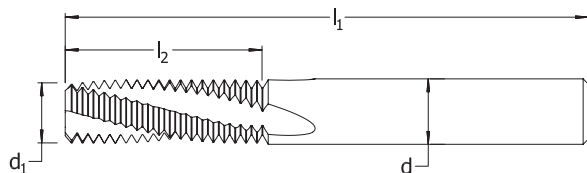

Feature:

55 degree thread profile.

thread size	shank diameter d	cutting diameter d₁	overall length l₁	length of cut l₂	number of flutes	order number	
						CTMBPP non-coolant	CTMBPPC coolant-thru
1/16, 1/8-28	1/4	.240	2-1/2	.572	3	C95056	C95060
1/4-19	5/16	.312	3	.737	4	C95057	C95061
1/2-14	1/2	.470	3-1/2	1.143	4	C95058	C95062
1-11	5/8	.620	4	1.546	5	C95059	C95063

Styles: CTMBPT Solid and CTMBPTC Coolant-Thru

British Pipe Parallel Inch - Helical Thread Mills


Note

For Internal & External Threads

BSPT

Carbide

Surface
Treatment

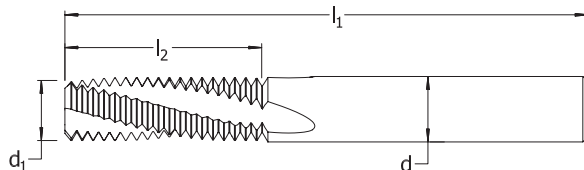

Feature:

55 degree thread profile.

thread size	shank diameter d	cutting diameter d₁	overall length l₁	length of cut l₂	number of flutes	order number	
						CTMBPT non-coolant	CTMBPTC coolant-thru
1/16, 1/8-28	1/4	.240	2-1/2	.401	3	C95064	C95068
1/4-19	5/16	.312	3	.578	4	C95065	C95069
1/2-14	1/2	.470	3-1/2	.785	4	C95066	C95070
1-11	5/8	.620	4	1.546	5	C95067	C95071

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series				18-22	22-32	>45
TiAlN	☆	☆	☆	☆	☆	☆	☆	☆	☆		☆	☆	☆

☆ = Best Performance ◆ = Acceptable

HSS

Carbon
Steel

Surface
Treatment

Bright



Feature:

Suitable for the repair of existing threads.

						order number	
die diameter TPI and series			decimal equiv.	length across flats in	thickness in	0650 carbon steel	492 high-speed steel
1/4	20	UNC	.2500	19/32	1/4	C65601	C77600
1/4	28	UNF	.2500	19/32	1/4	C65602	C77602
5/16	18	UNC	.3125	11/16	5/16	C65603	C77604
5/16	24	UNF	.3125	11/16	5/16	C65605	C77606
3/8	16	UNC	.3750	25/32	3/8	C65606	C77608
3/8	24	UNF	.3750	25/32	3/8	C65607	C77610
7/16	14	UNC	.4375	7/8	7/16	C65608	C77612
7/16	20	UNF	.4375	7/8	7/16	C65609	C77614
1/2	13	UNC	.5000	1 1/16	1/2	C65610	C77616
1/2	20	UNF	.5000	1 1/16	1/2	C65611	C77618
9/16	12	UNC	.5625	1 1/16	1/2	C65612	C77620
9/16	18	UNF	.5625	1 1/16	1/2	C65613	C77622
5/8	11	UNC	.6250	1 1/4	5/8	C65614	C77624
5/8	18	UNF	.6250	1 1/4	5/8	C65615	C77626
11/16	11	UNS	.6875	1 7/16	3/4	C65616	—
11/16	16	UNS	.6875	1 7/16	3/4	C65617	—
3/4	10	UNC	.7500	1 7/16	3/4	C65618	C77628
3/4	16	UNF	.7500	1 7/16	3/4	C65619	C77630
7/8	9	UNC	.8750	1 5/8	7/8	C65620	C77632
7/8	14	UNF	.8750	1 5/8	7/8	C65621	C77634
1	8	UNC	1.0000	1 13/16	1	C65622	C77636
1	12	UNF	1.0000	1 13/16	1	C65623	C77638
1	14	UNS	1.0000	1 13/16	1	C65624	C77640
1-1/8	7	UNC	1.1250	2	1	C65625	C77642
1-1/8	12	UNF	1.1250	2	1	C65627	C77644
1-1/4	7	UNC	1.2500	2 3/16	1	C65628	C77646
1-1/4	12	UNF	1.2500	2 3/16	1	C65629	—
1-3/8	6	UNC	1.4100	2 3/8	1	C65630	C77648
1-3/8	12	UNF	1.4100	2 3/8	1	C65631	—
1-1/2	6	UNC	1.5000	2 9/16	1	C65632	C77650
1-1/2	12	UNF	1.5000	2 9/16	1	C65633	—

Styles: 0660


HSS

Carbon
Steel

Surface
Treatment

Bright

Feature:

Suitable for the repair of existing threads.

die diameter TPI and series			decimal equiv.	length across flats in		thickness in	order number 0660 carbon steel
1/8	27	NPT	.1250	1-1/16		3/8	C65571
1/4	18	NPT	.2500	1-1/4		5/8	C65572
3/8	18	NPT	.3750	1-7/16		5/8	C65573
1/2	14	NPT	.5000	1-5/8		3/4	C65574
3/4	14	NPT	.7500	2		13/16	C65575
1	11-1/2	NPT	1.0000	2-3/8		1	C65576

Styles: 0650M

Hexagon Rethreading Metric

die diameter		decimal	length across flats		thickness		order number
TPI and series	equiv.		in	mm	in	mm	0650M carbon steel
M5 x 0.8	.1969		19/32	15.08	1/4	6.35	C65580
M6 x 1	.2362		19/32	15.08	1/4	6.35	C65581
M8 x 1.25	.3150		11/16	17.46	5/16	7.94	C65582
M10 x 1.5	.3937		7/8	22.23	7/16	11.11	C65583
M12 x 1.75	.4724		1-1/8	25.72	1/2	12.70	C65584
M14 x 2	.5512		1-1/8	25.72	1/2	12.70	C65585
M16 x 2	.6299		1-1/4	31.75	5/8	15.88	C65586
M20 x 2.5	.7874		1-5/8	41.28	7/8	22.23	C65587

SET
Style: 0650, 0650M

Hexagon Die Carbon Steel

set number	number of sizes	die sizes		order number 0650	set number	number of sizes	die sizes		order number 0650M
42NC	8	1/4-20 NC	1/2-13 NC	C67275	49Metric	7	M6 x 1		C67283
		5/16-18 NC	9/16-12 NC				M8 x 1.25		
		3/8-16 NC	5/8-11 NC				M10 x 1.5		
		7/16-14 NC	3/4-10 NC				M12 x 1.75		
42NF	8	1/4-28 NF	1/2-20 NF	C67276			M14 x 2		
		5/16-24 NF	9/16-18 NF				M16 x 2		
		3/8-24 NF	5/8-18 NF				M20 x 2.5		
		7/16-20 NF	3/4-16 NF						
44NC	10	1/4-20 NC	9/16-12 NC	C67278					
		5/16-18 NC	5/8-11 NC						
		3/8-16 NC	3/4-10 NC						
		7/16-14 NC	7/8-9 NC						
		1/2-13 NC	1-8 NC						
45NCNF	20	1/4-20 NC	1/4-28 NF	C67282					
		5/16-18 NC	5/16-24 NF						
		3/8-16 NC	3/8-24 NF						
		7/16-14 NC	7/16-20 NF						
		1/2-13 NC	1/2-20 NF						
		9/16-12 NC	9/16-18 NF						
		5/8-11 NC	5/8-18 NF						
		3/4-10 NC	3/4-16 NF						
		7/8-9 NC	7/8-14 NF						
		1-8 NC	1-14 NF						



Set C67275



Set C67278



HSS

Carbon
Steel

Surface
Treatment

Bright

Feature:

Designed to cut threads in bar stock.

Dies

Carbon Steel / High Speed Steel

						order number	
die diameter TPI and series			decimal equiv.	outside diameter in	thickness in	0610 carbon steel	0710 high-speed steel
0	80	UNF	.0600	13/16	1/4	C65022	—
1	64	UNC	.0730	13/16	1/4	C65026	—
1	72	UNF	.0730	13/16	1/4	C65027	—
2	56	UNC	.0860	13/16	1/4	C65036	—
2	64	UNF	.0860	13/16	1/4	C65037	—
3	48	UNC	.0990	13/16	1/4	C65045	—
3	56	UNF	.0990	13/16	1/4	C65046	—
4	40	UNC	.1120	13/16	1/4	C65048	—
4	48	UNF	.1120	13/16	1/4	C65049	—
5	40	UNC	.1250	13/16	1/4	C65057	C65729
5	44	UNF	.1250	13/16	1/4	C65058	C65730
6	32	UNC	.1380	13/16	1/4	C65061	C65733
6	32	UNC	.1380	1	3/8	C65114	C65785
6	40	UNF	.1380	13/16	1/4	C65062	C65734
8	32	UNC	.1640	13/16	1/4	C65069	C65739
8	32	UNC	.1640	1	3/8	C65119	C65789
8	36	UNF	.1640	13/16	1/4	C65070	C65740
10	24	UNC	.1900	13/16	1/4	C65075	C65743
10	24	UNC	.1900	1	3/8	C65124	C65792
10	32	UNF	.1900	13/16	1/4	C65076	C65744
10	32	UNF	.1900	1	3/8	C65125	C65793
12	24	UNC	.2160	13/16	1/4	C65083	C65751
12	24	UNC	.2160	1	3/8	C65132	C65798
12	28	UNF	.2160	13/16	1/4	C65084	C65752
1/4	20	UNC	.2500	13/16	1/4	C65093	C65760
1/4	20	UNC	.2500	1	3/8	C65140	C65804
1/4	20	UNC	.2500	1-1/2	1/2	C65192	C65839
1/4	20	UNC	.2500	2	5/8	C65264	—
1/4	28	UNF	.2500	13/16	1/4	—	C65761
1/4	28	UNF	.2500	1	3/8	C65142	C65805
1/4	28	UNF	.2500	1-1/2	1/2	C65193	C65840
1/4	28	UNF	.2500	2	5/8	C65265	—
5/16	18	UNC	.3125	13/16	1/4	—	C65766
5/16	18	UNC	.3125	1	3/8	C65147	C65808
5/16	18	UNC	.3125	1-1/2	1/2	C65197	C65844
5/16	18	UNC	.3125	2	5/8	C65269	—
5/16	24	UNF	.3125	13/16	1/4	—	C65767
5/16	24	UNF	.3125	1	3/8	C65148	C65809
5/16	24	UNF	.3125	1-1/2	1/2	C65198	C65845
5/16	24	UNF	.3125	2	5/8	C65270	—
3/8	16	UNC	.3750	1	3/8	C65159	C65816
3/8	16	UNC	.3750	1-1/2	1/2	C65208	C65855
3/8	16	UNC	.3750	2	5/8	C65280	—
3/8	24	UNF	.3750	1	3/8	C65160	C65817
3/8	24	UNF	.3750	1-1/2	1/2	C65209	C65856
3/8	24	UNF	.3750	2	5/8	C65281	—
7/16	14	UNC	.4375	1	3/8	C65171	C65828
7/16	14	UNC	.4375	1-1/2	1/2	C65220	C65865
7/16	14	UNC	.4375	2	5/8	C65292	—
7/16	20	UNF	.4375	1	3/8	C65172	C65829
7/16	20	UNF	.4375	1-1/2	1/2	C65221	C65866
7/16	20	UNF	.4375	2	5/8	C65293	—

continued on next page

Styles: 0610, 0710 (continued)
Round Adjustable
Inch

die diameter TPI and series			decimal equiv.	outside diameter in	thickness in	order number	
						0610 carbon steel	0710 high-speed steel
1/2	13	UNC	.5000	1	3/8	C65470	—
1/2	13	UNC	.5000	1-1/2	1/2	C65232	C65875
1/2	13	UNC	.5000	2	5/8	C65303	—
1/2	20	UNF	.5000	1	3/8	C65471	—
1/2	20	UNF	.5000	1-1/2	1/2	C65233	C65876
1/2	20	UNF	.5000	2	5/8	C65304	—
9/16	12	UNC	.5625	1-1/2	1/2	C65239	C65881
9/16	12	UNC	.5625	2	5/8	C65311	—
9/16	18	UNF	.5625	1-1/2	1/2	C65240	C65882
9/16	18	UNF	.5625	2	5/8	C65312	—
5/8	11	UNC	.6250	1-1/2	1/2	C65243	C65884
5/8	11	UNC	.6250	2	5/8	C65315	C65946
5/8	11	UNC	.6250	2-1/2	3/4	C65374	—
5/8	18	UNF	.6250	1-1/2	1/2	C65244	C65885
5/8	18	UNF	.6250	2	5/8	C65316	C65947
3/4	10	UNC	.7500	1-1/2	1/2	C65250	—
3/4	10	UNC	.7500	2	5/8	C65328	C65957
3/4	10	UNC	.7500	2-1/2	3/4	C65384	—
3/4	16	UNF	.7500	1-1/2	1/2	C65251	—
3/4	16	UNF	.7500	2	5/8	C65329	C65958
3/4	16	UNF	.7500	2-1/2	3/4	C65385	—
7/8	9	UNC	.8750	2	5/8	C65339	C65966
7/8	9	UNC	.8750	2-1/2	3/4	C65395	—
7/8	14	UNF	.8750	2	5/8	C65340	C65967
7/8	14	UNF	.8750	2-1/2	3/4	C65396	—
1	8	UNC	1.0000	2	5/8	C65349	—
1	8	UNC	1.0000	2-1/2	3/4	C65405	—
1	8	UNC	1.0000	3	1	C65416	—
1	12	UNF	1.0000	2	5/8	C65350	—
1	12	UNF	1.0000	2-1/2	3/4	C65406	—
1	12	UNF	1.0000	3	1	C65417	—
1	14	UNS	1.0000	2	5/8	C65407	—
1-1/8	7	UNC	1.1250	3	1	C65426	—
1-1/8	12	UNF	1.1250	3	1	C65427	—
1-1/4	7	UNC	1.2500	3	1	C65433	—
1-1/4	12	UNF	1.2500	3	1	C65434	—
1-3/8	6	UNC	1.3750	3	1	C65441	—
1-3/8	12	UNF	1.3750	3	1	C65442	—
1-1/2	6	UNC	1.5000	3	1	C65449	—
1-1/2	12	UNF	1.5000	3	1	C65450	—

Dies
Carbon Steel / High Speed Steel
Style: 0620
Round Adjustable - Pipe
Inch

die diameter TPI and series			decimal equiv.	outside diameter in	thickness in	order number
						0620 carbon steel
1/8	27	NPT	.1250	1	3/8	C65491
1/8	27	NPT	.1250	1-1/2	1/2	C65492
1/4	18	NPT	.2500	1-1/2	1/2	C65493
1/4	18	NPT	.2500	2	5/8	C65495
3/8	18	NPT	.3750	1-1/2	1/2	C65494
3/8	18	NPT	.3750	2	5/8	C69496
1/2	14	NPT	.5000	2	5/8	C65497

Pipe size round adjustable dies are not split.

HSS

Surface
Treatment


Bright

die diameter and TPI	decimal equiv.	outside diameter		thickness		order number
		in	mm	in	mm	0710M high-speed steel
M2.5 x 0.45	.0984	13/16	20.64	1/4	6.35	C65721
M3 x 0.5	.1181	13/16	20.64	1/4	6.35	C65724
M3.5 x 0.6	.1378	13/16	20.64	1/4	6.35	C65732
M4 x 0.7	.1575	13/16	20.64	1/4	6.35	C65737
M4.5 x 0.75	.1772	13/16	20.64	1/4	6.35	C65742
M5 x 0.8	.1969	13/16	20.64	1/4	6.35	C65747
M6 x 1	.2362	13/16	20.64	1/4	6.35	C65757
M6 x 1	.2362	1	25.40	3/8	9.53	C65801
M7 x 1	.2756	1	25.40	3/8	9.53	C65807
M8 x 1.25	.3150	1	25.40	3/8	9.53	C65813
M10 x 1.5	.3937	1	25.40	3/8	9.53	C65824
M12 x 1.75	.4724	1	25.40	3/8	9.53	C65833
M14 x 2	.5512	1-1/2	38.10	1/2	12.70	C65880
M16 x 2	.6300	1-1/2	38.10	1/2	12.70	C65889
M18 x 2.5	.7087	1-1/2	38.10	1/2	12.70	C65896
M20 x 2.5	.7874	1-1/2	38.10	1/2	12.70	C65901

Adjustable Dies

Die Stock - Round Adjustable

Styles: 222 & 224

Note

Style 222 holds round adjustable dies with three adjusting screws



Style 222 Die Stock

product number	die O.D.	overall length	order number
2	13/16	6-1/4	222 C67223
3	1	9	C67224
5	1-1/2	13-7/8	C67226
6	2	23	C67227
7	2-1/2	29	C67228
8	3	40	C67229

Note

Style 224 stocks have built-in workpiece guide and lock in place with two set screws



Style 224 Die Stock

product number	die O.D.	overall length	order number
13	13/16	6-1/4	224 C67235
14	1	13	C67236
15	1-1/2	17-3/4	C67237
16	2	26	C67238

Styles: 0550, 0551, 0552, 0553, 0554
Die Set
Quick Set - Inch

Steel
Construction

Bright

Surface
Treatment

Bright

- **Style 0554** Quick-Set Two-Piece Die System consists of these parts:

- Style 0550 — Die
- Style 0551 — Cap
- Style 0552 — Guide
- Style 0553 — Collet

- Inch sizes are sold as a complete assembly or in their component parts.

- Metric sizes are sold in their component parts only.

- Use with Quick-Set die stocks.
- Collet assembly for use with Quick-Set dies consists of a cap and a guide; order cap and guide separately, or assembled as a collet.
- Die halves are seated in the beveled cap slot and held in place by the guide, which screws into the underside of the cap.
- Die is adjusted by the set screws at either end of the slot.

- Caps of a given outside diameter are made with several different sizes of slots.
- Separate guide is required for each cutting size.
- To order separate guides, specify cutting size of the die and the size of the collet for 1/4" and 1/2" dies.
- For metric sizes where guide and collet assembly are not available, use Style 225 Quick-Set Jr. die stock to hold dies.



Style 0554 Die Assembly



Style 0550 Die Halves


Style 0553 Collet
(combined Cap and Guide)


Style 0551 Cap



Style 0552 Guide

order number

nominal size TPI and series				decimal equiv.	0554 complete assembly	0550 die blank	0550 die halves	0553 no. collet	0551 O.D. cap	0552 guide
4	40	UNC	.1120	C66782	A1	C66693	A1	C66754	1.250	C66681
6	32	UNC	.1380	C66783	A1	C66694	A1	C66755	1.250	C66682
8	32	UNC	.1640	C66784	A1	C66695	A1	C66756	1.250	C66683
10	24	UNC	.1900	C66785	A1	C66696	A1	C66757	1.250	C66684
10	32	UNF	.1900	C66786	A1	C66697	A1	C66757	1.250	C66684
12	24	UNC	.2160	C66787	A1	C66698	A1	C66758	1.250	C66685
1/4	20	UNC	.2500	C66788	A1	C66699	A1	C66759	1.250	C66686
1/4	20	UNC	.2500	C66789	A	C66701	1	C66760	2.000	C66737
1/4	28	UNF	.2500	C66790	A	C66700	1	C66760	2.000	C66737
5/16	18	UNC	.3125	C66791	A	C66703	1	C66761	2.000	C66738
5/16	24	UNF	.3125	C66792	A	C66704	1	C66761	2.000	C66738
3/8	16	UNC	.3750	C66793	B	C66705	1	C66762	2.000	C66739
3/8	24	UNF	.3750	C66794	B	C66706	1	C66762	2.000	C66739
7/16	14	UNC	.4375	C66795	B	C66707	1	C66763	2.000	C66740
7/16	20	UNF	.4375	C66796	B	C66708	1	C66763	2.000	C66740
1/2	13	UNC	.5000	C66797	B	C66709	1	C66764	2.000	C66741
1/2	20	UNF	.5000	C66798	B	C66711	1	C66764	2.000	C66741
1/2	13	UNC	.5000	C66801	C	C66710	5	C66769	2.750	C66746
1/2	20	UNF	.5000	C66802	C	C66712	5	C66769	2.750	C66746
9/16	12	UNC	.5625	C66803	C	C66713	5	C66770	2.750	C66747
9/16	18	UNF	.5625	C66804	C	C66714	5	C66770	2.750	C66747
5/8	11	UNC	.6250	C66805	C	C66715	5	C66771	2.750	C66748
5/8	18	UNF	.6250	C66806	C	C66716	5	C66771	2.750	C66748
3/4	10	UNC	.7500	C66807	C	C66717	5	C66772	2.750	C66749
3/4	16	UNF	.7500	C66808	C	C66718	5	C66772	2.750	C66749
7/8	9	UNC	.8750	C66809	D	C66719	5	C66773	2.750	C66750
7/8	14	UNF	.8750	C66810	D	C66720	5	C66773	2.750	C66750
1	8	UNC	1.0000	C66811	D	C66721	5	C66774	2.750	C66751
1	12	UNF	1.0000	C66812	D	C66722	5	C66774	2.750	C66751
1	14	UNS	1.0000	C66813	D	C66723	5	C66774	2.750	C66751

Die Set Quick Set - Metric

Styles: **0550, 0551, 0552, 0553** (continued)



nominal size TPI	decimal equiv.	order number					
		0550		0553		0551	0552
		die blank	die halves	no.	collet	cap	O.D. guide
M6 x 1	.2362	A	C66670	5	*	*	2.750 C66820
M8 x 1.25	.3150	A	C66671	5	*	*	2.750 C66821
M10 x 1.5	.3937	B	C66672	5	*	*	2.750 C66822
M12 x 1.75	.4724	B	C66673	5	*	*	2.750 C66823
M14 x 2	.5512	C	C66674	5	C66769	C66732	2.750 C66824
M16 x 2	.6300	C	C66675	5	C66770	C66732	2.750 C66825
M18 x 2.5	.7087	C	C66676	5	C66771	C66732	2.750 C66826
M20 x 2.5	.7874	C	C66677	5	C66772	C66732	2.750 C66827
M22 x 2.5	.8661	D	C66678	5	C66773	C66733	2.750 C66828
M24 x 3	.9449	D	C66679	5	C66774	C66733	2.750 C66829

*Use Style 225 Quick-Set Jr. die stock instead of collet assembly for these sizes.

Die Set Accessories

Styles: **223, 225**

Surface
Treatment



Style **223** - Regular Quick-Set Die Stock

Carbon Steel Black Oxide

- Use with all Series 0554 Quick-Set collets with two-piece dies.
- Quick-Set die stocks have center holes corresponding to the outside diameter of the Quick-Set collets.




Style 223
Regular Quick-
Set Die Stock

Style **225** - Jr. Quick-Set Die Stock

Carbon Steel Black Oxide

- Use with all Series 0550 Quick-Set two-piece dies without collet.
- Quick-Set Jr. die stocks are designed to use Quick-Set dies without collets.
- Double slots enable use of two different size blanks in the same stock.
- Dies fit directly into the stock and are held in place by a screw guide.

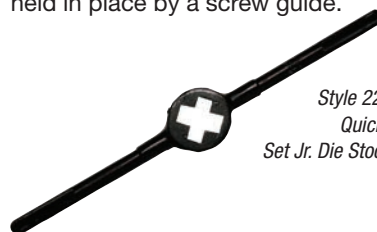

Style 225
Quick-
Set Jr. Die Stock

stock no.	collet no.	collet capacity	length of stock	order no. 223 stock
#A1	A1	1-1/4	7-1/2	C67216
#1	1	2	14-1/2	C67214
#5	5	2-3/4	23	C67217
#5A	5	2-3/4	26	C67215
#5B	5	2-3/4	29	C67218

stock no.	cutting size	die blank size	guide no.	cutting size range	length of stock	order no. 225 stock
#1	1/4 to 5/16	A	1	1/4 to 1/2	14-1/2	C67220
	3/8 to 1/2	B				
#5	9/16 to 3/4	C	5	9/16 to 1	26	C67221
	7/8 to 1	D				

Quick-Set Spanner Wrench

Style: **226**

stock no.	collet no.	collet capacity	order no. 226 stock
#A1	A1	1-1/4	C67232

- Since A1 guides are so small they are round not square, so you cannot use a standard wrench.
- Fits into two holes to turn guide.

Styles: 240, 242, 243, 244, 245
Tap Wrenches
Style: 240
Standard Straight

product number	mach screw	tap size ranges		pipe	overall length	order number
		fractional	metric			240
0	0 to 14	1/16 to 1/4	M1.5 to M6.3	—	7	C67201
14	0 to 14	1/16 to 3/8	M1.5 to M10	—	9	C67197
5	8 to 14	5/32 to 1/2	M4 to M12.5	1/8	11	C67202
6	8 to 14	5/32 to 3/4	M4 to M19	1/8 to 1/4	15	C67203
7	—	1/4 to 1-1/8	M12 to M28	1/8 to 3/4	19	C67204
8	—	3/4 to 1-5/8	M19 to M40	3/8 to 1-1/4	40	C67205
22	—	1 to 2-1/2	M25 to M56	3/4 to 2	54	C67200

Note

Used for hand tapping.


Style: 242
Plain T-Handle

product number	mach screw	tap size ranges		overall length	order number
		fractional	metric		242
T9	0 to 14	1/16 to 1/4	M1.5 to M6.3	2-3/4	C67206
T10	12 to 14	7/32 to 1/2	M5.5 to M12.5	3-5/8	C67207

Note

Used for hand tapping in out-in-the-open jobs.


Style: 243
Slip T-Handle

product number	mach screw	tap size ranges		overall length	order number
		fractional	metric		243
T11	0 to 14	1/16 to 1/4	M1.5 to M6.3	2-3/4	C67208
T12	12 to 14	7/32 to 1/2	M5.5 to M12.5	3-5/8	C67209

Note

Used for hand tapping or in difficult spaces requiring a slip handle.


Style: 244
Combination Ratchet and Slip Handle

product number	mach screw	tap size ranges		overall length	order number
		fractional	metric		244
T13	0 to 14	1/16 to 1/4	M1.5 to M6.3	3-3/4	C67210
T14	12 to 14	7/32 to 1/2	M5.5 to M12.5	5	C67211

Note

Used for hand tapping in difficult spaces needing ratchet drive.


Style: 245 Long Shank T-Handle Tap Wrench
Long Shank T-Handle

product number	mach screw	tap size ranges		overall length	order number
		fractional	metric		245
T16	0 to 14	1/16 to 1/4	M1.5 to M6.3	8-3/4	C67212
T17	12 to 14	7/32 to 1/2	M5.5 to M12.5	10-5/8	C67213

Note

Used for hand tapping where extra reach is required.



Cost Saving Sets

General Purpose Tap

				Surface Treatment	Size Range		Case Type	
				Bright	H-Limit	Inch	Metal	Plastic
Type	Style	Order No.	Number of pieces					
	General Purpose	1002	C55090	10	•	yes	UNC: 1/4-20, 5/16-18, 3/8-16, 7/16-14, 1/2-13 UNF: 1/4-28, 5/16-24, 3/8-24, 7/16-20, 1/2-20	•



Dies - Inch

						Size Range		Case Type	
						Inch		Metal	Plastic
Type	Style	Order No.	Number of Sizes	Set Number					
	General Purpose	0650	C67275	8	42NC	1/4-20 NC 5/16-18 NC 3/8-16 NC 7/16-14 NC	1/2-13 NC 9/16-12 NC 5/8-11 NC 3/4-10 NC	•	•
			C67276	8	42NF	1/4-28 NF 5/16-24 NF 3/8-24 NF 7/16-20 NF	1/2-20 NF 9/16-18 NF 5/8-18 NF 3/4-16 NF	•	•
			C67278	10	44NC	1/4-20 NC 5/16-18 NC 3/8-16 NC 7/16-14 NC 1/2-13 NC	9/16-12 NC 5/8-11 NC 3/4-10 NC 7/8-9 NC 1-8 NC	•	•
			C67284	10	NCNF	1/4-20 NC 5/16-18 NC 3/8-16 NC 7/16-14 NC 1/2-13 NC	1/4-28 NF 5/16-24 NF 3/8-24 NF 7/16-20 NF 1/2-20 NF	•	•
			C67282	20	45NCNF	1/4-20 NC 5/16-18 NC 3/8-16 NC 7/16-14 NC 1/2-13 NC 9/16-12 NC 5/8-11 NC 3/4-10 NC 7/8-9 NC 1-8 NC	1/4-28 NF 5/16-24 NF 3/8-24 NF 7/16-20 NF 1/2-20 NF 9/16-18 NF 5/8-18 NF 3/4-16 NF 7/8-14 NF 1-14 NF	•	•



Set C67275



Set C67276



Set C67278



Set C67282

Dies - Metric

Dies - Metric						Size Range		Case Type	
				Number of Sizes	Set Number	Metric		Metal	Plastic
	Drill Type	Style Number	Order No.						
	General Purpose	0650M	C67283	7	49Metric	M6 x 1 M8 x 1.25 M10 x 1.5 M12 x 1.75	M14 x 2 M16 x 2 M20 x 2.5	•	





Gauging Threaded Holes

To confirm the accuracy of a tapped hole, always use a Go-No Go gauge. Never use a fastener i.e.: (screw, or bolt) Using a screw, or bolt will not allow you to verify size of the thread produced, but only indicate that the bolt used will fit in that particular hole. Go-No Gauges can give indications as to where the thread produced is within the thread specification. A screw or bolt is not capable of giving such an indication. Accurate gauges will also help predict remaining tool life by indicating tightness or looseness of the gage in the part.



NPT vs. NPTF Taper Pipe Threads:

The two most common taper pipe threads used in the United States are NPT and NPTF. Applications range from electrical conduits and hand railings to high-pressure pipe lines that carry gas or caustic fluids. NPT threads are for mechanical or low-pressure air or fluid applications and require the use of sealing compounds like Teflon tape, to provide the seal. When the application is more critical, and the sealing compound may fail due to high heat or pressure, NPTF Dryseal threads are used. This mechanical seal is produced by the mating and slight crushing of the threads when a wrench is applied to tighten the fittings.

Visually, both threads appear to be identical. Both have a $\frac{3}{4}$ " taper over one foot of length. Both have the same pitch diameter at the top of the hole of internal threads or end of the pipe on external threads, and both have the same thread lengths or depths. However, there is a subtle difference in the thread form that differentiates the two. The major and minor diameters of both threads are differ slightly. With NPT threads, after a wrench is applied, slight spaces at the major and minor diameters may exist that would allow the assembly to leak and therefore a sealing compound is used to fill any gaps. On the other hand, NPTF threads are designed to ensure that sufficient crushing of the entire thread form will take place to produce a mechanical seal.

How does the difference in thread forms effect the tooling used to produce NPT and NPTF threads? Taps are available for both NPT and NPTF threads having the appropriate form to produce each type of thread. Since NPT threaded parts require sealing compounds, it is acceptable to use an NPTF tap for NPT applications. However, NPT taps cannot be used for NPTF applications, as it will likely produce a thread that will leak. The same is true of external threads. In most cases the tap drill is the same for both forms.

The most significant difference in the two threads is the inspection required. Since sealing compounds will be used for NPT threads, only a single plug with a step, known as an L1 plug (internal thread) or a single thin L1 ring (external) are required to check size. However, since the taper and the position of major and minor diameters are so critical to the sealing of NPTF threads, the additional threads in the assembly known as L2 and L3, and the major and minor diameters are inspected with either special plug or ring gauges.



Technical Information

Tap Nomenclature / Chamfers	190	USCTI Table 302A	199
Tap and Drill Recommendations	192	USCTI Table 311	200
Hardness Conversion Table	193	USCTI Table 327	201
Standard Tap Marking Systems	194	USCTI Table 329	202
Application Data		USCTI Table 331	203
Progress / Performance Taps	195	USCTI Table 341	204
Tapping Speed	196	USCTI Table 352	205
USCTI Table 302	198	Made to Order, Special Taps, FastTap	208

Tap Nomenclature

Bottoming Tap

A tap having a chamfer length of 1-2 threads.

Chamfer

The tapering of the threads at the front end of each land of a chaser, tap or die by cutting away and relieving the crest of the first few teeth to distribute the cutting action over several teeth.

Chamfer Angle

The angle formed between the chamfer and the axis of the tap or die by cutting away and relieving the crest of the first few teeth to distribute the cutting action over several teeth.

Crest

The surface of the thread which joins the flanks of the thread and is farthest from the cylinder or cone from which the thread projects.

Flank

The part of a helical thread surface which connects the crest and the root and which is theoretically a straight line in an axial plane section.

Flute

The longitudinal channel formed in a tap to create cutting edges on the thread profile and to provide chip spaces and cutting fluid passage.

Hand of Threads

A thread, when viewed axially, winds in a clockwise and receding direction for LEFT-HAND THREADS and counter-clockwise and receding direction for RIGHT-HAND THREADS.

Hook, Chordal


A concave face having an angle of inclination specified between a chord passing through the root and crest of a thread form at the cutting face, and a radial line through the crest at the cutting edge.

Hook, Tangential


A concave face having an angle of inclination specified between a line tangent to the hook surface at the cutting edge and a radial line to the same point.

continued on next page

Illustration of Tap Terms

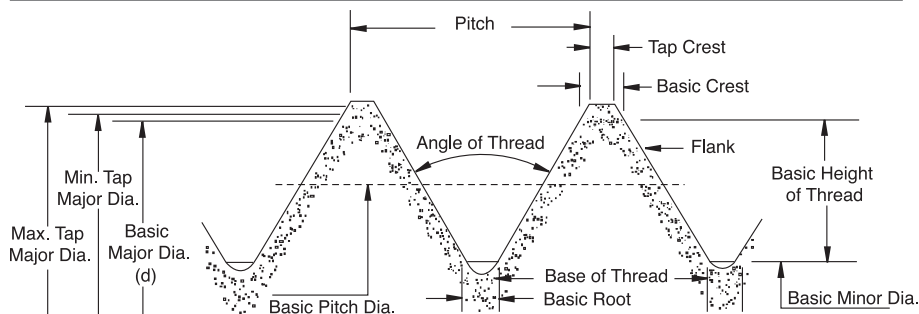


Tap Chamfers

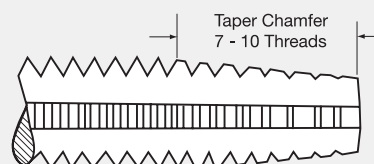


Taper (7 to 10 pitches)

The taper chamfer has the longest standard chamfer ensuring easier starting. It requires less tapping torque because of more working teeth.

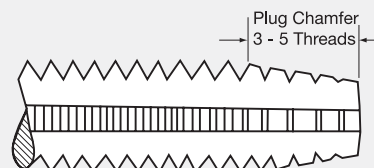


Plug (3 to 5 pitches)

The most common chamfer for use by hand or machine in through or blind holes. This chamfer is more efficient than a bottoming or modified-bottoming chamfer.

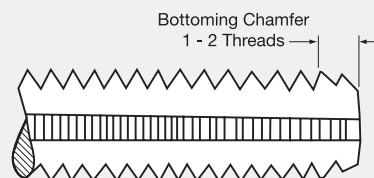

Bottoming (1 to 2 pitches)

For threading close to the bottom of blind holes, the bottoming chamfer is the least efficient chamfer available.

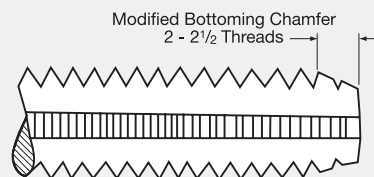

Modified-Bottoming (2 to 2 1/2 pitches)

This short chamfer allows for threading close to the bottom of blind holes. Due to the slightly longer chamfer and more working teeth, this chamfer is more efficient than a bottoming chamfer.

Hook Angle

The angle of inclination of a concave face, usually specified either as CHORDAL HOOK or TANGENTIAL HOOK.

Interrupted Thread Tap

A tap having an odd number of lands with alternate teeth in the thread helix removed. In some cases alternate teeth are removed only for a portion of the thread length.

Land

One of the threaded sections between the flutes of a tap.

Lead of Thread

The distance a screw thread advances axially in one complete turn. On a single start tap the lead and pitch are identical. On a multiple start tap the lead is the multiple of the pitch.

Major Diameter

The diameter of the major cylinder or cone, at a given position on the axis, that bounds the crests of an external thread or the roots of an internal thread.

Minor Diameter

The diameter of the minor cylinder or cone, at a given position on the axis, that bounds the roots of an external thread or the crests of an internal thread.

Pitch Diameter

The diameter of an imaginary cylinder or cone, at a given point on the axis, of such a diameter and location of its axis that its surface would pass through the thread in such a manner as to make the thread ridge and the thread groove equal and, therefore, is located equidistant between the sharp major and minor cylinders or cones of a given thread form. On a theoretically perfect thread, these widths are equal to one half of the basic pitch (measured parallel to the axis). See illustration below

Plug Tap

A tap with 3 to 5 chamfered threads.

Spiral Point

The angular fluting in the cutting face of the land at the chamfered end. It is formed at an angle with respect to the tap axis of opposite hand to that of rotation. Its length is usually greater than the chamfer length and its angle with respect to the tap axis is usually made great enough to direct the chips ahead of the tap. The tap may or may not have longitudinal flutes.


Square

Four driving flats parallel to the axis on a tap shank forming a square or square with round corners.


Taper Tap

A tap having a chamfer length of 7 to 10 threads.


Pitch Diameter

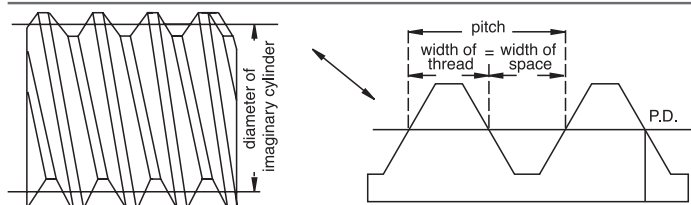

Tap End Views

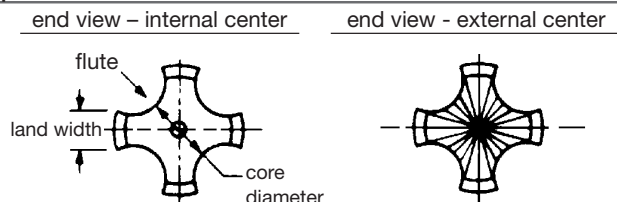

Screw Thread Tolerances

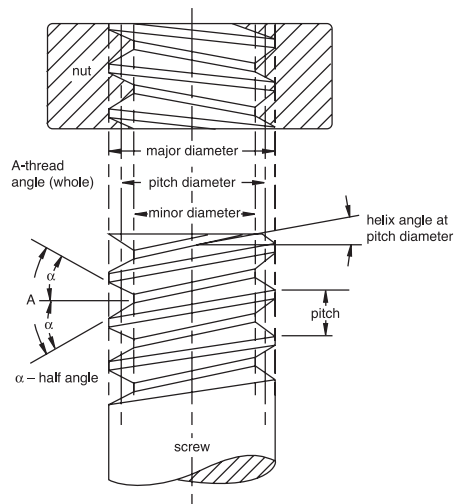

It is generally recognized that, in mass production, it is impossible to reproduce in exact detail the theoretically perfect product as laid out on the drawing board. The allowed slight variation between the theoretically perfect product and each unit of the actual product is called the TOLERANCE.

Allowance - An intentional difference in correlated dimensions of mating parts. It is the minimum clearance or maximum interference between such parts.

Angle of Thread - The angle included between the flanks of the thread measured in an axial plane.

Half Angle of Thread - The angle included between a flank of the thread and the normal (90°) to the axis, measured in an axial plane.

Lead of Thread - The distance a screw thread advances axially in one turn. On a single-thread screw the lead and pitch are identical. On a double thread the lead is 2X pitch, on a triple thread the lead is 3X pitch, etc.

Major Diameter - The largest diameter of a straight screw thread.

Minor Diameter - The smallest diameter of a straight screw thread.

Pitch - The distance from a point on a screw thread to a corresponding point on the next thread measured parallel to the axis.

$$\text{The pitch in inches} = \frac{1}{\text{no. of threads per inch}}$$

Inch Sizes (measurements in inches)

tap size and pitch	cutting taps drill size	decimal equiv	forming taps drill size	decimal equiv.
0-80	3/64	.0469	54	.0550
1-64	53	.0595	51	.0670
1-72	53	.0595	51	.0670
2-56	50	.0700	5/64	.0781
2-64	50	.0700	47	.0785
3-48	47	.0785	43	.0890
3-56	46	.0810	2.30	.0905
4-40	43	.0890	38	.1015
4-48	42	.0935	2.60	.1024
5-40	38	.1015	33	.1130
5-44	37	.1040	2.90	.1142
6-32	36	.1065	1/8	.1250
6-40	33	.1130	3.25	.1280
8-32	29	.1360	25	.1495
8-36	29	.1360	24	.1520
10-24	26	.1470	11/64	.1719
10-32	21	.1590	16	.1770
12-24	16	.1770	8	.1990
12-28	15	.1800	7	.2010
1/4-20	7	.2010	1	.2280
1/4-28	3	.2130	15/64	.2340
5/16-18	F	.2570	L	.2900
5/16-24	I	.2720	M	.2950
3/8-16	5/16	.3125	S	.3480
3/8-24	Q	.3320	T	.3580
7/16-14	U	.3680	Y	.4040
7/16-20	25/64	.3906	Z	.4130
1/2-13	27/64	.4219	15/32	.4682
1/2-20	29/64	.4531	12.25	.4823
9/16-12	31/64	.4844	17/32	.5312
9/16-18	33/64	.5156	13.50	.5315
5/8-11	17/32	.5312	14.75	.5807
5/8-18	37/64	.5781	15.25	.6004
3/4-10	21/32	.6562	45/64	.7031
3/4-16	11/16	.6875	23/32	.7188
7/8-9	49/64	.7656	*	*
7/8-14	13/16	.8125	*	*
1-8	7/8	.8750	*	*
1-12	59/64	.9219	*	*
1-1/8 - 7	63/64	.9844	*	*
1-1/8 - 12	1 3/64	1.0469	*	*
1-1/4 - 7	1 7/64	1.1094	*	*
1-1/4 - 12	1 11/64	1.1719	*	*
1-3/8 - 6	1 7/32	1.2188	*	*
1-3/8 - 12	1 19/64	1.2969	*	*
1-1/2 - 6	1 11/32	1.3438	*	*
1-1/2 - 12	1 27/64	1.4219	*	*

Metric Sizes (measurements in millimeters and inches)

tap size and pitch	cutting taps drill size (mm)	decimal equiv (in)	forming taps drill size (mm)	decimal equiv. (in)
M1.6 x 0.35	1.25	.0492	1.45	.0571
M1.8 x 0.35	1.45	.0571	1.65	.0650
M2 x 0.40	1.60	.0630	1.80	.0709
M2.2 x 0.45	1.75	.0689	2.00	.0787
M2.5 x 0.45	2.05	.0807	2.30	.0906
M3 x 0.50	2.50	.0984	7/64	.1094
M3.5 x 0.60	2.90	.1142	3.20	.1260
M4 x 0.70	3.30	.1299	3.70	.1476
M4.5 x 0.75	3.70	.1476	4.10	.1614
M5 x 0.80	4.20	.1654	14	.1820
M6 x 1.00	5.00	.1969	7/32	.2188
M7 x 1.00	6.00	.2362	F	.2570
M8 x 1.25	6.70	.2638	7.40	.2913
M8 x 1.00	7.00	.2756	19/64	.2969
M10 x 1.50	8.50	.3346	U	.3680
M10 x 1.25	8.70	.3425	9.40	.3701
M12 x 1.75	10.20	.4016	11.20	.4409
M12 x 1.25	10.80	.4252	11.50	.4528
M14 x 2.00	12.00	.4724	33/64	.5156
M16 x 2.00	14.00	.5512	19/32	.5938
M16 x 1.50	14.50	.5709	15.25	.6004
M18 x 2.50	15.50	.6102	39/64	.6094
M18 x 1.50	16.50	.6496	17.25	.6791
M20 x 2.50	17.50	.6890	*	*
M20 x 1.50	18.50	.7283	*	*
M22 x 2.50	19.50	.7677	*	*
M22 x 1.50	20.50	.8071	*	*
M24 x 3.00	21.00	.8268	*	*
M24 x 2.00	22.00	.8661	*	*
M27 x 3.00	24.00	.9449	*	*
M27 x 2.00	25.00	.9843	*	*
M30 x 3.50	26.50	1.0433	*	*
M30 x 2.00	28.00	1.1024	*	*
M33 x 3.50	29.50	1.1614	*	*
M33 x 2.00	31.00	1.2205	*	*
M36 x 4.00	32.00	1.2598	*	*
M36 x 3.00	33.00	1.2992	*	*
M39 x 4.00	35.00	1.3780	*	*
M39 x 3.00	36.00	1.4173	*	*

Pipe Tap Sizes (measurements in millimeters and inches)

nominal pipe tap size	NPT & NPTF		NPSM	NPSC	NPSF
	without reamer	with reamer			
1/16-27	C (.242)	A (.234)	—	.250	D (.246)
1/8-27	Q (.332)	21/64	T (.358)	Q (.332)	R (.339)
1/4-18	7/16	27/64	15/32	7/16	7/16
3/8-18	9/16	9/16	.603 (special)	37/64	37/64
1/2-14	45/64	11/16	19.0 mm	18.0 mm	18.0 mm
3/4-14	29/32	57/64	61/64	59/64	59/64
1 - 11-1/2	1-9/64	1-1/8	1-13/64	1-5/32	1-5/32
1-1/4-11-1/2	1-31/64	1-15/32	1-35/64	1-1/2	—
1-1/2 - 11-1/2	1-23/32	1-45/64	1-25/32	1-47/64	—
2 - 11-1/2	2-3/16	2-11/64	2-1/4	2-13/64	—

* Contact Technical Service for recommendations.

Hole sizes shown may not suit UNJ and MJ hole requirements.

Technical Information
Hardness Conversion Table

Use this table to match the hardness of your workpiece material to the correct tap.

10 M/M Ball 3000 Kg	120° Cone 150 Kg	1/16" Ball 100 Kg	Model C	1000 Lb. per Sq. In.	10 M/M Ball 3000 Kg	120° Cone 150 Kg	1/16" Ball 100 Kg	Model C	1000 Lb. per Sq. In.
Brinell	Rockwell C	Rockwell B	Shore Scleroscope	Tensile Strength	Brinell	Rockwell C	Rockwell B	Shore Scleroscope	Tensile Strength
800	72	—	100	—	276	30	105	42	136
780	71	—	99	—	269	29	104	41	132
760	70	—	98	—	261	28	103	40	129
745	68	—	97	367	258	27	102	39	127
725	67	—	96	357	255	26	102	39	125
712	66	—	95	350	249	25	101	38	123
682	65	—	93	337	245	24	100	37	119
668	64	—	91	326	240	23	99	36	117
652	63	—	89	318	237	23	99	35	115
626	62	—	87	306	229	22	98	34	113
614	61	—	85	299	224	21	97	33	110
601	60	—	83	292	217	20	96	33	107
590	59	—	81	290	211	19	95	32	104
576	57	—	79	281	206	18	94	32	102
552	56	—	76	270	203	17	94	31	100
545	55	—	75	268	200	16	93	31	98
529	54	—	74	259	196	15	92	30	96
514	53	120	72	254	191	14	92	30	94
502	52	119	70	247	187	13	91	29	92
495	51	119	69	244	185	12	91	29	91
477	49	118	67	233	183	11	90	28	90
461	48	117	66	227	180	10	89	28	89
451	47	117	65	223	175	9	88	27	86
444	46	116	64	219	170	7	87	27	84
427	45	115	62	209	167	6	87	27	82
415	44	115	60	204	165	5	86	26	81
401	43	114	58	196	163	4	85	26	80
388	42	114	57	191	160	3	84	25	78
375	41	113	55	184	156	2	83	25	76
370	40	112	54	182	154	1	82	25	75
362	39	111	53	179	152	—	82	24	74
351	38	111	51	173	150	—	81	24	74
346	37	110	50	170	147	—	80	24	72
341	37	110	49	168	145	—	79	23	71
331	36	109	47	163	143	—	79	23	70
323	35	109	46	158	141	—	78	23	69
311	34	108	46	153	140	—	77	22	69
301	33	107	45	148	135	—	75	22	67
293	32	106	44	144	130	—	72	22	65
285	31	105	43	140					

Taps, dies, and other threading tools will be marked with the nominal size, number of threads per inch, and the proper symbol to identify the thread form. The symbols below are in agreement with the ASME B1.7 1965 (R 1972) Standard on nomenclature, definitions and letter symbols for screw threads and other national standards.

Symbol	Reference	Symbol	Reference
ACME-C	Acme Thread-Centralizing	NPTF	Dryseal American National Standard Taper Pipe Thread
ACME-G	Acme Thread-General Purpose	NPTR	American National Standard Taper Pipe Thread for Railing Joints (Tap Marked NPT)
AMO	American Standard Microscope Objective Thread	NR	American National Thread with a 0.108p to 0.144p Controlled Root Radius
ANPT	Aeronautical National Form Taper Pipe Thread (Ground Thread Tap marked NPT)	NS	American National Thread-Special
BA	British Association Standard Thread	PTF-SAE	Short Dryseal SAE Short Taper Pipe Thread
BSF	British Standard Fine Thread Series	SGT	Special Gas Taper Thread
BSPP	British Standard Pipe (Parallel) Thread	SPL-PTF	Dryseal Special Taper Pipe Thread
BSPT	British Standard Taper Pipe Thread	STI	Special Thread for Helical Coil Wire Screw Thread Inserts
BSW	British Standard Whitworth Coarse Thread Series	Stub Acme	Stub Acme Thread
M	Metric Standard Threads	*UN	Unified Constant-Pitch Thread Series
N	American National 8, 12 and 16 Thread Series (8N, 12N, 16N)	*UNC	Unified Coarse Thread Series
N BUTT	American Buttress Thread	*UNEF	Unified Extra-Fine Thread Series
NC	American National Coarse Thread Series	*UNF	Unified Fine Thread Series
NEF	American National Extra-Fine Thread Series	UNJ	Unified Thread Series with a 0.150lp to 0.18042p Controlled Root Radius on External Thread only.
NF	American National Fine Thread Series	UNJC	Unified Coarse Thread Series with a 0.150lp to 0.18042p Controlled Root Radius on External Thread only.
NGO	National Gas Outlet Thread (specify right or left hand)	UNJF	Unified Fine Thread Series with a 0.150lp to 0.18042p Controlled Root Radius on External Thread only.
NGS	National Gas Straight Thread	UNM	Unified Miniature Thread Series
NGT	National Gas Taper Thread (See also "SGT")	UNR	Unified Constant-pitch Thread Series with a 0.108p to 0.144p Controlled Root Radius
NH	American National Hose Coupling & Firehose Coupling Threads	UNRC	Unified Coarse Thread Series with a 0.108p to 0.144p Controlled Root Radius
NPS	For Tap marking Only (See NPSC, NPSM)	UNRF	Unified Fine Thread Series with a 0.108p to 0.144p Controlled Root Radius
NPSC	American National Standard Straight Pipe Thread in Pipe Couplings (Tap Marked NPS)	*UNS	Unified Thread-Special
NPSF	Dryseal American National Standard Fuel Internal Straight Pipe Thread	V	A 60 "V" thread with Truncated Crest and Root. The theoretical "V" Form is usually flattened to the user's specifications.
NPSH	American National Standard Straight Pipe Thread for Hose Couplings		
NPSI	Dryseal American National Standard Intermediate Internal Straight Pipe Thread		
NPSL	American National Standard Straight Pipe Thread for Loose-Fitting Mechanical Joints with locknuts.		
NPSM	American National Standard Straight Pipe Threads for Free-Fitting Mechanical Joints for Fixtures (Tap Marked NPS)"		
NPT	American National Standard Taper Pipe Thread (see ANPT, NPTR)		

*Taps are not marked with "U", but with the symbol for the corresponding American Standard thread form with which it is compatible.

Technical Information
Application Data
Progress/Performance Taps

These taps were developed for the highest cutting performance to cope with the increasing demands placed on industrial thread cutting. By optimizing the cutting geometry, substrate material, and surface treatment the tap will achieve the best results in CNC as well as in conventional thread cutting environments.

Our **Progress series** of taps are designed to be a "Universal" tool that performs well in a wide range of Steel Alloys as well as Stainless Steels and Ductile Irons. Our **Performance series** of taps are designed for those difficult jobs including Stainless Steels but work well in Steel Alloys and Ductile Irons.

Material		Application 1 = First Choice, 2 = Second Choice, (3) = Also Suitable			Tapping Speed (SFM) Vc = SFM RPM = (SFM/Diameter) x 3.82		
		Black Oxide	TiAlN	Hardlube	Black Oxide	TiAlN	Hardlube
Structural steels < 1000 N/mm ²	G01		1		40	73	77
Structural steels > 1000 N/mm ²	G02		(3)	1	27	40	42
Case hardening steels < 1000 N/mm ²	G03		2	1	33	66	70
Case hardening steels > 1000 N/mm ²	G04		(3)	1	20	33	35
Heat treatable steels < 1000 N/mm ²	G05		2	1	20	46	49
Heat treatable steels > 1000 N/mm ²	G06		(3)	1	14	27	29
Nitriding steels	G07	(3)	2	1	14	27	29
Carbon tool steels	G08		1	2	20	30	32
Heat Resisting Steels < 1400 N/mm ²	G09	(3)	(3)	1	14	23	25
Cr Stainless Steels, Sulphured	G10	(3)	(3)	1	20	33	35
Cr Stainless Steels, Ferric & Martensitic	G11	(3)	(3)	1	20	33	35
Cr-Ni Stainless Steels, Austenitic	G12	(3)	(3)	1	17	27	29
Free Cutting Steels	G13		1		46	79	83
Cast Steels < 1000 N/mm ²	G14		1		33	53	56
Cast Steels > 900 N/mm ²	G15		2	1	20	27	29
Malleable Cast Iron	G16		(3)		33	53	56
Nodular Graphite Cast Iron	G17		(3)		40	53	56
Lamellar Graphite Cast Iron (Grey Cast Iron)	G18		(3)		33	46	49
Vermicular Graphite Cast Iron	G19		(3)		40	53	56
Copper	G20		(3)		33	53	56
Hard Brass -- Short Chipping	G21		(3)		66	115	121
Soft Brass -- Long Chipping	G22		(3)		60	109	115
Red Brass	G23		(3)		33	60	63
Phosphor Bronze	G24		(3)		40	69	73
Aluminum Alloy - Wrought	G25		(3)		50	79	83
Aluminum Alloy - Cast (0.5% to 5% Silicon)	G26		(3)		66	86	91
Aluminum Alloy - Cast (5% to 10% Silicon)	G27		(3)		66	86	91
Aluminum Alloy - Cast (> 10% Silicon)	G28		(3)		66	86	91
Magnesium Alloy - Wrought	G29		(3)		50	79	83
Magnesium Alloy - Cast	G30		(3)		66	86	91
Nickel Alloy	G31		(3)		14	20	21
Titanium Alloy	G32		(3)		14	20	21
Ferro - TiC	G33		(3)		14	20	21
Thermoplastic Compounds/Synthetics	G34		(3)		66	66	70
High Strength Structural Steels - Fine Grained	G35		(3)		20	33	35

Consider these factors when trying to determine the best tapping speeds.

- Material to be tapped
- Length of chamfer on tap
- Percentage of full thread to be cut
- Length of hole (depth of thread)
- Pitch of thread
- Cutting fluids
- Machine equipment
- Horizontal or vertical tapping

The best and most efficient operating speeds for taps cannot be calculated with the same certainty as for many other metalcutting tools. With other tools, the feed per revolution can be set at any desired point and can be varied as conditions demand. Taps, on the other hand, must always be advanced at a rate equal to one pitch for every revolution. The style of tap may vary the conditions. For example, with a bottoming tap, the first thread on each land cuts the full height of thread, while, with a taper or starting tap, a number of threads do their share of the cutting before the full height of thread is reached. The depth of thread also varies, depending on the pitch. The coarser the thread, the greater the advance of the tap per revolution and the greater the amount of material removed.

Tapping Definitions

SFM = Surface Feet per Minute
 RPM = Revolutions Per Minute
 IPM = Inches Per Minute
 TPI = Threads Per Inch
 S m/m = Surface Meters per Minute
 $p = 3.1416$
 mm/m = Millimeters per Minute
 P = Pitch (1/ No of Threads Per Inch)

The method of feeding the tap, and the type of equipment for driving, also influence the permissible speeds. If taps are mechanically fed at the proper rate of advance, they can be operated at higher speeds than if they are required to feed themselves and pull some part of the machine along with them.

Speeds may be modified to take into account any or all of the factors listed above. Speeds must be lowered as the length of thread increases, because, in deep thread holes, the accumulated chips increase friction and interfere with lubrication.

Bottoming taps must be run slower than plug taps.

Tapping of full height of thread calls for slower speed than if the commercial 75% height only is required.

Coarse-thread taps in the larger diameters should be run more slowly than fine-thread taps of the same diameters.

The quantity and quality of cutting fluid may affect the permissible speeds as much as 100%.

Taper threaded taps, such as pipe taps, should be operated from 1/2 to 3/4 the speed of a straight thread tap of comparable major diameter.

Tapping Formula

Inch Sizes

SFM = $(\text{RPM} \times \text{tool diameter}) / 3.82$
 or $0.262 \times \text{RPM} \times \text{tool diameter}$
 RPM = $(3.82 \times \text{SFM}) / \text{tool diameter}$
 IPM = $\text{RPM} / \text{TPI}^*$
 or $^*P \times \text{RPM}$

Metric Sizes

S m/m = $(p \times \text{tool diameter} \times \text{RPM}) / 1000$
 RPM = $(\text{m/m} \times 1000) / p \times \text{tool diameter}$
 mm/m = $\text{mm } P \times \text{RPM}$



Technical Information




Tapping Speeds

UNC/UNF and NPT/NPTF Sizes

UNC UNF	NPT NPTF	Surface Feet per Minute (SFM)																	
		5'	10'	15'	20'	25'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
Tap Size	Taper Pipe	Revolutions per Minute (RPM)																	
0		318	637	955	1273	1592	1910	2546	3183	3820	4456	5093	5729	6366	7003	7639	8276	8913	9549
1		273	546	819	1046	1308	1570	2093	2617	3140	3663	4186	4710	5233	5756	6279	6805	7326	1849
2		212	424	637	888	1110	1333	1777	2221	2665	3109	3554	3999	4442	4886	5330	5774	6218	6662
3		191	382	573	772	964	1157	1543	1929	2315	2701	3086	3472	3858	4244	4629	5015	5401	5787
4		174	347	521	682	853	1023	1364	1705	2046	2387	2728	3069	3411	3751	4092	4434	4775	5115
5		147	294	441	611	764	917	1222	1528	1833	2139	2445	2750	3056	3361	3667	3973	4278	4584
6		136	273	409	553	691	829	1106	1382	1859	1935	2212	2488	2766	3042	3318	3595	3871	4148
8		119	239	358	466	583	699	932	1165	1398	1631	1864	2097	2330	2563	2796	3029	3262	3495
10		101	201	302	402	502	603	804	1005	1205	1406	1607	1808	2009	2210	2411	2612	2813	3014
12		87	174	260	354	442	531	707	884	1061	1238	1415	1592	1769	1945	2122	2300	2476	2653
1/4		76	153	229	306	382	458	611	764	917	1070	1222	1375	1528	1681	1833	1986	2139	2292
5/16		62	123	185	245	306	367	489	611	733	856	978	1100	1222	1345	1467	1589	1711	1833
3/8		50	101	151	204	255	305	407	509	611	713	815	917	1019	1120	1222	1324	1426	1528
7/16	1/8	43	87	130	175	219	262	349	437	524	611	698	786	873	960	1048	1135	1222	1310
1/2	—	38	76	115	153	191	229	305	382	458	535	611	688	764	840	917	993	1070	1146
9/16	1/4	34	68	102	137	172	206	274	342	410	478	547	616	683	752	820	888	952	1020
5/8	—	32	64	96	122	153	183	244	306	367	428	489	550	611	672	733	794	856	917
11/16	3/8	28	55	83	111	138	167	222	278	333	389	444	500	556	611	667	722	778	833
3/4	—	25	51	76	102	128	153	203	255	305	357	407	458	509	560	611	662	713	764
7/8	1/2	22	43	65	87	109	131	175	218	262	306	350	392	437	480	524	568	611	655
1	—	19	38	57	76	96	115	153	191	230	268	305	344	382	420	458	497	535	573
1-1/8	3/4	17	34	51	68	84	102	136	170	204	238	272	306	340	373	407	441	475	509
1-1/4	—	15	31	46	61	76	92	122	153	183	214	244	275	305	336	367	397	428	458
1-3/8	1	14	28	42	56	69	83	111	139	167	194	222	250	278	306	333	361	389	417
1-1/2	—	13	25	38	51	63	76	102	127	153	178	204	229	255	280	305	331	356	382
1-5/8		12	23	35	47	59	71	94	118	141	165	188	212	235	259	282	306	329	353
1-3/4		11	22	33	44	55	65	87	109	131	153	175	196	218	240	262	284	306	327
1-7/8		10	20	30	41	51	61	81	102	122	143	163	183	204	224	244	265	285	306
2		9	19	29	38	48	57	76	96	115	134	153	172	191	210	229	248	267	287

Metric Sizes

Tap Size	Surface Feet per Minute (SFM)																	
	5'	10'	15'	20'	25'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
Revolutions per Minute (RPM)																		
M1	490	979	1469	1959	2449	2938	3918	4897	5877	6856	7836	8815	9795	10774	11754	12733	13713	14692
M2	242	484	725	967	1209	1451	1934	2418	2901	3385	3868	4352	4835	5319	5803	6286	6770	7253
M3	162	324	486	647	809	971	1295	1619	1942	2266	2590	2914	3237	3561	3885	4208	4532	4856
M3.5	138	277	415	554	692	830	1107	1384	1661	1938	2214	2491	2768	3045	3322	3599	3875	4152
M4	122	243	365	487	608	730	973	1217	1460	1703	1946	2190	2433	2676	2920	3163	3406	3650
M5	97	194	291	388	485	582	776	970	1163	1357	1551	1745	1939	2133	2327	2521	2715	2905
M6	81	162	243	324	405	486	647	809	971	1133	1295	1457	1619	1781	1942	2104	2266	2428
M7	69	138	208	277	346	415	554	692	830	969	1107	1246	1384	1522	1661	1799	1938	2076
M8	61	121	182	243	303	364	485	606	728	849	970	1091	1213	1334	1455	1577	1698	1819
M10	48	97	145	194	242	291	388	485	582	679	776	873	970	1067	1163	1260	1357	1454
M12	40	81	121	162	202	243	324	405	486	567	647	728	809	890	971	1052	1133	1214
M14	35	69	104	139	173	208	277	347	416	485	555	624	693	763	832	901	971	1040
M16	30	61	91	121	152	182	243	303	364	424	485	546	606	667	728	788	849	910
M18	27	54	81	108	135	162	216	269	323	377	431	485	539	593	647	700	754	808
M20	24	49	73	97	121	146	194	243	291	340	388	437	485	534	582	631	680	728
M22	22	44	66	88	110	132	176	221	265	309	353	397	441	485	529	573	618	662
M24	20	40	61	81	101	121	162	202	243	283	323	364	404	445	485	526	566	606
M27	18	36	54	72	90	108	144	180	216	252	287	323	359	395	431	467	503	539
M30	16	32	49	65	81	97	129	162	194	226	259	291	323	356	388	420	453	485



nominal diameter range inches over to (inc.)	machine screw size number inches	nominal fractional diameter inches	nominal metric diameter millimeters (inches)	blank design no.	L overall length	l thread length	l ₂ square length	d ₁ shank diameter	a square size
.052 .065	0 (.0600)		M1.6 (.0630)	1	1.63	.31	.19	.1410	.110
.065 .078	1 (.0730)		M1.8 (.0709)	1	1.69	.38	.19	.1410	.110
.078 .091	2 (.0860)		M2 (0787) M2.2 (.0866)	1	1.75	.44	.19	.1410	.110
.091 .104	3 (.0990)		M2.5 (.0984)	1	1.81	.50	.19	.1410	.110
.104 .117	4 (.1120)			1	1.88	.56	.19	.1410	.110
.117 .130	5 (.1250)		M3 (.1181)	1	1.94	.63	.19	.1410	.110
.130 .145	6 (.1380)		M3.5 (.1378)	1	2.00	.69	.19	.1410	.110
.145 .171	8 (.1640)		M4 (.1575)	1	2.13	.75	.25	.1680	.131
.171 .197	10 (.1900)		M4.5 (.1772) M5 (.1969)	1	2.38	.88	.25	.1940	.152
.197 .223	12 (.2160)			1	2.38	.94	.28	.2200	.165
.223 .260		1/4 (.2500)	M6 (.2362)	2	2.50	1.00	.31	.2550	.191
.260 .323		5/16 (.3125)	M7 (.2756) M8 (.3150)	2	2.72	1.13	.38	.3180	.238
.323 .395		3/8 (.3750)	M10 (.3937)	2	2.94	1.25	.44	.3810	.286
.395 .448		7/16 (.4375)		3	3.16	1.44	.41	.3230	.242
.448 .510		1/2 (.5000)	M12 (.4724)	3	3.38	1.66	.44	.3670	.275
.510 .573		9/16 (.5625)	M14 (.5512)	3	3.59	1.66	.50	.4290	.322
.573 .635		5/8 (.6250)	M16 (.6299)	3	3.81	1.81	.56	.4800	.360
.635 .709		11/16 (.6875)	M18 (.7087)	3	4.03	1.81	.63	.5420	.406
.709 .760		3/4 (.7500)		3	4.25	2.00	.69	.5900	.442
.760 .823		13/16 (.8125)	M20 (.7874)	3	4.47	2.00	.69	.6520	.489
.823 .885		7/8 (.8750)	M22 (.8661)	3	4.69	2.22	.75	.6970	.523
.885 .948		15/16 (.9375)	M24 (.9449)	3	4.91	2.22	.75	.7600	.570
.948 1.010		1 (1.0000)	M25 (.9843)	3	5.13	2.50	.81	.8000	.600
1.010 1.073		1-1/16 (1.0625)	M27 (1.0630)	3	5.13	2.50	.88	.8960	.672
1.073 1.135		1-1/8 (1.1250)		3	5.44	2.56	.88	.8960	.672
1.135 1.198		1-3/16 (1.1875)	M30 (1.1811)	3	5.44	2.56	1.00	1.0210	.766
1.198 1.260		1-1/4 (1.2500)		3	5.75	2.56	1.00	1.0210	.766
1.260 1.323		1-5/16 (1.3125)	M33 (1.2992)	3	5.75	2.56	1.06	1.1080	.831
1.323 1.385		1-3/8 (1.3750)		3	6.06	3.00	1.06	1.1080	.831
1.358 1.448		1-7/16 (1.4375)	M36 (1.4173)	3	6.06	3.00	1.13	1.2330	.925
1.448 1.510		1-1/2 (1.5000)		3	6.38	3.00	1.13	1.2330	.925
1.510 1.635		1-5/8 (1.6250)	M39 (1.5354)	3	6.69	3.19	1.13	1.3050	.979
1.635 1.760		1-3/4 (1.7500)	M42 (1.6535)	3	7.00	3.19	1.25	1.4300	1.072
1.760 1.885		1-7/8 (1.8750)		3	7.31	3.56	1.25	1.5190	1.139
1.885 2.010		2 (2.0000)	M48 (1.8898)	3	7.63	3.56	1.38	1.6440	1.233
2.010 2.135		2 1/8 (2.1250)		3	8.00	3.56	1.38	1.7690	1.327
2.135 2.260		2 1/4 (2.2500)	M56 (2.2047)	3	8.25	3.56	1.44	1.8940	1.420
2.260 2.385		2 3/8 (2.3750)		3	8.50	4.00	1.44	2.0190	1.514
2.385 2.510		2 1/2 (2.5000)		3	8.75	4.00	1.50	2.1000	1.575
2.510 2.635		2 5/8 (2.6250)	M64 (2.5197)	3	8.75	4.00	1.50	2.2250	1.669
2.635 2.760		2 3/4 (2.7500)		3	9.25	4.00	1.56	2.3500	1.762
2.760 2.885		2 7/8 (2.8750)	M72 (2.8346)	3	9.25	4.00	1.56	2.4750	1.856
2.885 3.010		3 (3.0000)		3	9.75	4.56	1.63	2.5430	1.907
3.010 3.135		3 1/8 (3.1250)		3	9.75	4.56	1.63	2.6680	2.001
3.135 3.260		3 1/4 (3.2500)	M80 (3.1496)	3	10.00	4.56	1.75	2.7930	2.095
3.260 3.385		3 3/8 (3.3750)		3	10.00	4.56	1.75	2.8830	2.162
3.385 3.510		3 1/2 (3.5000)		3	10.25	4.94	2.00	3.0080	2.256
3.510 3.635		3 5/8 (3.6250)	M90 (3.5433)	3	10.25	4.94	2.00	3.1330	2.350
3.635 3.760		3 3/4 (3.7500)		3	10.50	5.31	2.13	3.2170	2.413
3.760 3.885		3 7/8 (3.8750)		3	10.50	5.31	2.13	3.3420	2.506
3.885 4.010		4 (4.0000)	M100 (3.9370)	3	10.75	5.31	2.25	3.4670	2.600

Technical Information

Standard Tap Dimensions


Tolerances

USCTI Table 302


Element	Nominal Diameter Range in inches		Direction	Tolerance inches
	Over	To (inc.)		
Length Overall - L	.0520	1.0100	Plus or Minus	.031
	1.0100	4.0100	Plus or Minus	.063
Length of Thread - I	.0520	.2230	Plus or Minus	.047
	.2230	.5100	Plus or Minus	.063
	.5100	1.5100	Plus or Minus	.094
	1.5100	4.0100	Plus or Minus	.125
	4.0100		Plus or Minus	.063
Length of square - I₂	.0520	1.0100	Plus or Minus	.031
	1.0100	4.0100	Plus or Minus	.063
Diameter of shank - d₁	.0520	.2230	Minus	.0015
	.2230	.6350	Minus	.0015
	.6350	1.0100	Minus	.0020
	1.0100	1.5100	Minus	.0020
	1.5100	2.0100	Minus	.0030
	2.0100	4.0100	Minus	.0030
Size of square - a	.0520	.5100	Minus	.004
	.5100	1.0100	Minus	.006
	1.0100	2.0100	Minus	.008
	2.0100	4.0100	Minus	.010

Optional Neck and Shortened Thread Length


USCTI Table 302A

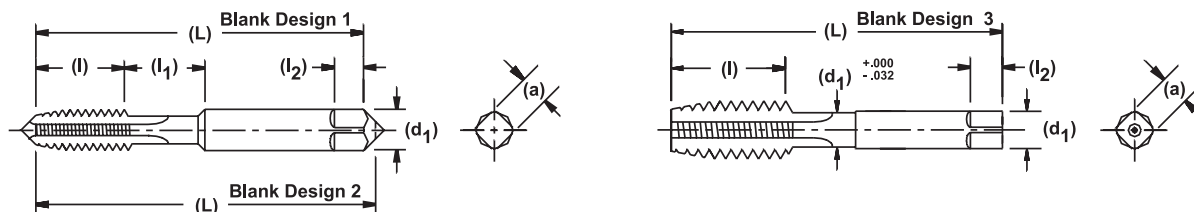


nominal diameter range inches over to (inc.)		machine screw size number inches	nominal fractional diameter inches	nominal metric diameter millimeters (inches)	blank design no.	L overall length	I thread length	I ₁ neck length	I ₂ square length	d ₁ shank diameter	a square size
.104	.117	4 (.1120)			1	1.88	.31	.25	.19	.1410	.110
.117	.130	5 (.1250)		M3 (.1181)	1	1.94	.31	.31	.19	.1410	.110
.130	.145	6 (.1380)		M3.5 (.1378)	1	2.00	.38	.31	.19	.1410	.110
.145	.171	8 (.1640)		M4 (.1575)	1	2.13	.38	.38	.25	.1680	.131
.171	.197	10 (.1900)		M4.5 (.1772)	1	2.38	.50	.38	.25	.1940	.152
				M5 (.1969)							
.197	.223	12 (.2160)			1	2.38	.50	.44	.28	.2200	.165
.223	.260		1/4 (.2500)	M6 (.2362)	2	2.50	.63	.38	.31	.2550	.191
.260	.323		5/16 (.3125)	M7(.2756) M8(.3150)	2	2.72	.69	.44	.38	.3180	.238
.323	.395		3/8 (.3750)	M10 (.3937)	2	2.94	.75	.50	.44	.3810	.286
.395	.448		7/16 (.4375)		3	3.16	.88	-	.41	.3230	.242
.448	.510		1/2 (.5000)	M12 (.4724)	3	3.38	.94	-	.44	.3670	.275
.510	.573		9/16 (.5625)	M14 (.5541)	3	3.59	1.00	-	.50	.4290	.322
.573	.635		5/8 (.6250)	M16 (.6299)	3	3.81	1.09	-	.56	.4800	.360
.635	.709		11/16 (.6875)	M18 (.7087)	3	4.03	1.09	-	.63	.5420	.406
.709	.760		3/4 (.7500)		3	4.25	1.22	-	.69	.5900	.442
.760	.823		13/16 (.8125)	M20 (.7874)	3	4.47	1.22	-	.69	.6520	.489
.823	.885		7/8 (.8750)	M22 (.8661)	3	4.69	1.34	-	.75	.6970	.523
.885	.948		15/16 (.9375)	M24 (.9449)	3	4.91	1.34	-	.75	.7600	.570
.948	1.010		1 (1.0000)	M25 (.9843)	3	5.13	1.50	-	.81	.8000	.600



311
Pipe Tap Blank Design 1



311
Pipe Tap Blank Design 2
with optional neck



311
Pipe Tap Blank Design 3

General Dimensions (all measurements in inches)

nominal size	tap style	overall length L	thread length l	square length l ₃	shank dia. d ₂	square size a	optional neck l ₂
1/16	1	2.13	.69	.38	.3125	.234	.375
1/8	1	2.13	.75	.38	.3125	.234	—
1/8	1	2.13	.75	.38	.4375	.328	.375
1/4	1	2.44	1.06	.44	.5625	.421	.375
3/8	1	2.56	1.06	.50	.7000	.531	.375
1/2	3	3.13	1.38	.63	.6875	.515	—
3/4	3	3.25	1.38	.69	.9063	.679	—
1	3	3.75	1.75	.81	1.1250	.843	—
1-1/4	3	4.00	1.75	.94	1.3125	.984	—
1-1/2	3	4.25	1.75	1.00	1.5000	1.125	—
2	3	4.50	1.75	1.13	1.8750	1.406	—
2-1/2	3	5.50	2.56	1.25	2.2500	1.687	—
3	3	6.00	2.63	1.38	2.6250	1.968	—
3-1/2	3	6.50	2.69	1.50	2.8125	2.108	—
4	3	6.75	2.75	1.56	3.0000	2.250	—

Tolerances (all measurements in inches)

element	range	direction	tolerance
Length Overall	1/16" to 3/4" inc.	+ / -	.031
- L	1" to 4" inc.	+ / -	.063
Length of Thread	1/16" to 3/4" inc.	+ / -	.063
- l	1" to 1-1/4" inc.	+ / -	.094
	1-1/2" to 4"	+ / -	.125
Length of Square	1/16" to 3/4" inc.	+ / -	.031
- l ₃	1" to 4" inc.	+ / -	.063
Diameter of Shank	1/16" to 1/8"	—	.0015
- d ₂	1/4" to 1" inc.	—	.0020
	1-1/4" to 4" inc.	—	.0030
Size of Square	1/16" to 1/8"	—	.004
- a	1/4" to 3/4" inc.	—	.006
	1" to 4" inc.	—	.008

Lead Tolerance

A maximum lead error of + / - .0005" in 1" of thread is permitted.

Pitch Diameter Limits
for taps through 1" diameter:

- H1 = basic to basic plus .0005"
- H2 = basic plus .0005" to basic plus .001"
- H3 = basic plus .001" to basic plus .0015"
- H4 = basic plus .0015" to basic plus .002"
- H5 = basic plus .002" to basic plus .0025"
- H6 = basic plus .0025" to basic plus .003"

for Taps over 1" Diameter Through 1-1/2" diameter:

- H4 = basic plus .001" to basic plus .002"

Angle Tolerance

Threads Per Inch Error in Half Angle

- 6 to 9 inclusive 25' + / -
- 10 to 28 inclusive 30' + / -

Formula (Approximate)

- Max. Major Diameter = Basic Major Diameter + A*
- Min. Major Diameter = Max. Major Diameter - B*

*See Table 331.

Thread Limits

nom size	threads per inch			major diameter			basic pitch dia	pitch diameter limits											
	NC UNC	NF UNF	NS UNS	basic	min	max		H1 limit		H2 limit		H3 limit		H4 limit		H5 limit		H6 limit	
1/4	20	—	—	.2500	.2540	.2550	.2175	.2175	.2180	.2180	.2185	.2185	.2190	—	—	.2195	.2200	—	—
1/4	—	28	—	.2500	.2525	.2535	.2268	.2268	.2273	.2273	.2278	.2278	.2283	.2283	.2288	—	—	—	—
5/16	18	—	—	.3125	.3170	.3180	.2764	.2764	.2769	.2769	.2774	.2774	.2779	—	—	.2784	.2789	—	—
5/16	—	24	—	.3125	.3155	.3165	.2854	.2854	.2859	.2859	.2864	.2864	.2869	.2869	.2874	—	—	—	—
3/8	16	—	—	.3750	.3800	.3810	.3344	.3344	.3349	.3349	.3354	.3354	.3359	—	—	.3364	.3369	—	—
3/8	—	24	—	.3750	.3780	.3790	.3479	.3479	.3484	.3484	.3489	.3489	.3494	.3494	.3499	—	—	—	—
7/16	14	—	—	.4375	.4435	.4445	.3911	—	—	.3916	.3921	.3921	.3926	—	—	.3931	.3936	—	—
7/16	—	20	—	.4375	.4415	.4425	.4050	—	—	—	—	.4060	.4065	—	—	.4070	.4075	—	—
1/2	13	—	—	.5000	.5065	.5075	.4500	.4500	.4505	.4505	.4510	.4510	.4515	—	—	.4520	.4525	—	—
1/2	—	20	—	.5000	.5040	.5050	.4675	.4675	.4680	.4680	.4685	.4685	.4690	—	—	.4695	.4700	—	—
9/16	12	—	—	.5625	.5690	.5700	.5084	—	—	.5089	—	—	.5099	—	—	.5104	.5109	—	—
9/16	—	18	—	.5625	.5670	.5680	.5264	—	—	.5269	.5274	.5274	.5279	—	—	.5284	.5289	—	—
5/8	11	—	—	.6250	.6320	.6330	.5660	—	—	.5665	.5670	.5670	.5675	—	—	.5680	.5685	—	—
5/8	—	18	—	.6250	.6295	.6305	.5889	—	—	.5894	.5899	.5899	.5904	—	—	.5909	.5914	—	—
11/16	—	—	11	.6875	.6945	.6955	.6285	—	—	—	—	.6295	.6300	—	—	—	—	—	—
11/16	—	—	16	.6875	.6925	.6935	.6469	—	—	—	—	.6479	.6484	—	—	—	—	—	—
3/4	10	—	—	.7500	.7575	.7590	—	—	.6855	.6855	.6860	.6860	.6865	—	—	.6870	.6875	—	—
3/4	—	16	—	.7500	.7550	.7560	.7094	.7094	.7099	.7099	.7104	.7104	.7109	—	—	.7114	.7119	—	—
7/8	9	—	—	.8750	.8835	.8850	.8028	—	—	—	—	—	—	.8043	.8048	—	—	.8053	.8058
7/8	—	14	—	.8750	.8810	.8820	.8286	—	—	.8291	.8296	—	—	.8301	.8306	—	—	.8311	.8316
1	8	—	—	1.0000	1.0095	1.0110	.9188	—	—	.9193	.9198	—	—	.9203	.9208	—	—	.9213	.9218
1	—	12	—	1.0000	1.0065	1.0075	.9459	—	—	—	—	—	—	.9474	.9479	—	—	—	—
1	—	—	14	1.0000	1.0060	1.0070	.9536	—	—	—	—	—	—	.9551	.9556	—	—	—	—
1-1/8	7	—	—	1.1250	1.1350	1.1370	1.0322	—	—	—	—	—	—	1.0332	1.0342	—	—	—	—
1-1/8	—	12	—	1.1250	1.132	1.1325	1.0709	—	—	—	—	—	—	1.0719	1.0729	—	—	—	—
1-1/4	7	—	—	1.2500	1.2600	1.2620	1.1572	—	—	—	—	—	—	1.1582	1.1592	—	—	—	—
1-1/4	—	12	—	1.2500	1.2565	1.2575	1.1959	—	—	—	—	—	—	1.1969	1.1979	—	—	—	—
1-3/8	6	—	—	1.3750	1.3870	1.3890	1.2667	—	—	—	—	—	—	1.2677	1.2687	—	—	—	—
1-3/8	—	12	—	1.3750	1.3815	1.3825	1.3209	—	—	—	—	—	—	1.3219	1.3229	—	—	—	—
1-1/2	6	—	—	1.5000	1.5120	1.5140	1.3917	—	—	—	—	—	—	1.3927	1.3937	—	—	—	—
1-1/2	—	12	—	1.5000	1.507	1.5075	1.4459	—	—	—	—	—	—	1.4469	1.4479	—	—	—	—

USCTI Table 329

Machine Screw Taps

Lead Tolerance

A maximum lead error of + / - .0005" in 1" of thread is permitted.

Pitch Diameter Limits:

H1 = basic to basic + .0005" to basic + .001"

H2 = basic + .0005" to basic + .001"

H3 = basic + .001" to basic + .0015"

H7 = basic + .003" to basic + .0035"

Angle Tolerance

Threads Per Inch
20 to 80 inclusive

Error in Half Angle
30' + / -

Formula

Max. Major Diameter = Basic Major Diameter + A

Min. Major Diameter = Max. Major Diameter - B

A = Constant to add: 45% of the theoretical truncation to nearest .0005"

B = Major diameter tolerance.

Thread Limits

nom size	threads per inch			major diameter			basic pitch dia	pitch diameter limits							
	NC UNC	NF UNF	NS UNS					H1 limit		H2 limit		H3 limit		H7 limit	
				basic	min	max		min	max	min	max	min	max	min	max
0	—	80	—	.0600	.0605	.0615	.0519	.0519	.0524	.0524	.0529	—	—	—	—
1	64	—	—	.0730	.0735	.0745	.0629	.0629	.0634	.0634	.0639	—	—	—	—
1	—	72	—	.0730	.0735	.0745	.0640	.0640	.0645	.0645	.0650	—	—	—	—
2	56	—	—	.0860	.0865	.0875	.0744	.0744	.0749	.0749	.0754	—	—	—	—
2	—	64	—	.0860	.0865	.0875	.0759	—	—	.0764	.0769	—	—	—	—
3	48	—	—	.0990	.1000	.1010	.0855	.0855	.0860	.0860	.0865	—	—	—	—
3	—	56	—	.0990	.0995	.1005	.0874	.0874	.0879	.0879	.0884	—	—	—	—
4	—	—	36	.1120	.1135	.1145	.0940	—	—	.0945	.0950	—	—	—	—
4	40	—	—	.1120	.1135	.1145	.0958	.0958	.0963	.0963	.0968	—	—	—	—
4	—	48	—	.1120	.1130	.1140	.0985	.0985	.0990	.0990	.0995	—	—	—	—
5	40	—	—	.1250	.1265	.1275	.1088	.1088	.1093	.1093	.1098	—	—	—	—
5	—	44	—	.1250	.1260	.1270	.1102	—	—	.1107	.1112	—	—	—	—
6	32	—	—	.1380	.1400	.1410	.1177	.1177	.1182	.1182	.1187	.1187	.1192	.1207	.1212
6	—	40	—	.1380	.1395	.1405	.1218	.1218	.1223	.1223	.1228	—	—	—	—
8	32	—	—	.1640	.1660	.1670	.1437	.1437	.1442	.1442	.1447	.1447	.1452	.1467	.1472
8	—	36	—	.1640	.1655	.1665	.1460	—	—	.1465	.1470	—	—	—	—
10	24	—	—	.1900	.1930	.1940	.1629	.1629	.1634	.1634	.1639	.1639	.1644	.1659	.1664
10	—	32	—	.1900	.1920	.1930	.1697	.1697	.1702	.1702	.1707	.1707	.1712	.1727	.1732
12	24	—	—	.2160	.2190	.2200	.1889	—	—	—	—	.1899	.1904	—	—
12	—	28	—	.2160	.2185	.2195	.1928	—	—	—	—	.1938	.1943	—	—



Technical Information

Special Taps, Ground Thread
Unified & American National Form

USCTI Table 331

General

The following tables and formula are used in determining the limits and tolerances for ground thread taps having special diameter or special pitch or both and having a thread lead angle not in excess of 5%, unless otherwise specified. This table does not apply to the diameter and pitch combinations shown in Tables 327 and 329.

Note: When the tap major diameter must be determined from a specific tap pitch diameter, the maximum major diameter = the minimum specified pitch diameter – constant C, + constant A.

Lead Tolerance

A maximum lead error of + / – .0005" in 1" of thread is permitted.

Angle Tolerance

Threads Per Inch	Error in Half Angle
4 to 5-1/2 inclusive	20' + / –
6 to 9 inclusive	25' + / –
10 to 80 inclusive	30' + / –

Formula

Max. Major Diameter	=	Basic Major Diameter + A
Min. Major Diameter	=	Max. Major Diameter – B
Max. Pitch Diameter	=	Min. Pitch Diameter + D
Min. Pitch Diameter	=	Basic Pitch Diameter + C

A = constant to add:

35% of the theoretical truncation for 4 to 5 threads per inch

40% for 5-1/2 to 12 threads per inch

45% for 13 to 80 threads per inch

to nearest .005" for 8 or more threads per inch

B = Major diameter tolerance

C = Amount over basic for minimum pitch diameter

D = Pitch diameter tolerance

Values for W, X, Y and Z (inches)

threads per inch	A	B	C thru 5/8	C over 5/8" thru 2-1/2"	C over 2-1/2	D thru 1"	D over 1" thru 1-1/2"	D over 1-1/2" thru 2-1/2"	D over 2-1/2"
80	.0015	.0010	.0005	.0010	.0015	.0005	.0010	.0010	.0015
56	.0015	.0010	.0005	.0010	.0015	.0005	.0010	.0010	.0015
48	.0020	.0010	.0005	.0010	.0015	.0005	.0010	.0010	.0015
44	.0020	.0010	.0005	.0010	.0015	.0005	.0010	.0010	.0015
40	.0025	.0010	.0005	.0010	.0015	.0005	.0010	.0010	.0015
36	.0025	.0010	.0005	.0010	.0015	.0005	.0010	.0010	.0015
32	.0030	.0010	.0010	.0010	.0015	.0005	.0010	.0010	.0015
28	.0035	.0010	.0010	.0010	.0015	.0005	.0010	.0010	.0015
24	.0040	.0010	.0010	.0010	.0015	.0005	.0010	.0015	.0015
20	.0050	.0010	.0010	.0010	.0015	.0005	.0010	.0015	.0015
18	.0055	.0010	.0010	.0010	.0015	.0005	.0010	.0015	.0015
16	.0060	.0010	.0010	.0010	.0015	.0005	.0010	.0015	.0020
14	.0070	.0010	.0010	.0015	.0015	.0005	.0010	.0015	.0020
13	.0075	.0010	.0010	.0015	.0015	.0005	.0010	.0015	.0020
12	.0075	.0010	.0010	.0015	.0015	.0005	.0010	.0015	.0020
11	.0080	.0010	.0010	.0015	.0020	.0005	.0010	.0015	.0020
10	.0090	.0015	—	.0015	.0020	.0005	.0010	.0015	.0020
9	.0100	.0015	—	.0015	.0020	.0005	.0010	.0015	.0020
8	.0110	.0015	—	.0015	.0020	.0005	.0010	.0015	.0020
7	.0120	.0020	—	.0015	.0020	.0010	.0010	.0020	.0025
6	.0140	.0020	—	.0015	.0020	.0010	.0010	.0020	.0025
5-1/2	.0160	.0025	—	.0015	.0020	.0010	.0015	.0020	.0025
5	.0160	.0025	—	.0015	.0020	.0010	.0015	.0020	.0025
4-1/2	.0170	.0025	—	.0015	.0020	.0010	.0015	.0020	.0025
4	.0190	.0025	—	.0015	.0020	.0010	.0015	.0020	.0025

For intermediate pitches use value for next coarser pitch.

General

These tables and formula are used in determining the limits and tolerances for ground thread metric taps unless otherwise specified. They apply only to metric threads having a 60° form with a P/8 flat at the major diameter of the basic thread form.

Note: When the tap major diameter must be determined from a specific tap pitch diameter, the minimum major diameter equals the maximum specified tap pitch diameter minus constant Y, plus the basic size height of thread (.64952P), plus constant W.

Lead Tolerance

A maximum lead error of + / - .0005" in 1" of thread is permitted.

Angle Tolerance

Pitch mm	Deviation in Half Angle
over 0.25 to 2.5 inclusive	30' + / -
over 2.5 to 4 inclusive	25' + / -
over 4 to 6 inclusive	20' + / -

Formula

$$\begin{aligned} \text{Max. Major Diameter} &= \text{Min.} + X \\ \text{Min. Major Diameter} &= \text{Basic} + W \\ \text{Max. Pitch Diameter} &= \text{Basic} + Y \\ \text{Min. Pitch Diameter} &= \text{Max.} - Z \end{aligned}$$

W = Constant to add to Basic Major Diameter
(.080P converted to inches)

X = Major Diameter Tolerance

Y = Amount over Basic for Maximum Pitch Diameter

Z = Pitch Diameter Tolerance

Values for W, X, Y and Z (inches)

pitch mm	inch equivalent	W	X	Y	Y	Y	Y	Z	Z	Z	Z
		inch	inch	M1.6 thru M6.3	over M6.3 thru M25	over M25 thru M90	over M90	M1.6 thru M6.3	over M6.3 thru M25	over M25 thru M90	over M90
0.3	.01181	.0009	.0010	.0015	.0015	.0020	.0020	.0006	.0006	.0008	.0008
0.35	.01378	.0011	.0010	.0015	.0015	.0020	.0020	.0006	.0006	.0008	.0008
0.4	.01575	.0013	.0010	.0015	.0020	.0020	.0020	.0006	.0006	.0008	.0010
0.45	.01772	.0014	.0010	.0015	.0020	.0020	.0020	.0006	.0008	.0008	.0010
0.5	.01968	.0016	.0010	.0015	.0020	.0020	.0025	.0006	.0008	.0010	.0010
0.6	.02362	.0019	.0010	.0020	.0020	.0025	.0025	.0008	.0008	.0010	.0010
0.7	.02756	.0022	.0016	.0020	.0020	.0025	.0025	.0008	.0008	.0010	.0010
0.75	.02953	.0024	.0016	.0020	.0025	.0025	.0030	.0008	.0010	.0010	.0012
0.8	.03150	.0025	.0016	.0020	.0025	.0025	.0030	.0008	.0010	.0010	.0012
0.9	.03543	.0028	.0016	.0020	.0025	.0025	.0030	.0008	.0010	.0010	.0012
1	.03937	.0032	.0016	.0025	.0025	.0030	.0030	.0010	.0010	.0012	.0012
1.25	.04921	.0039	.0025	.0025	.0025	.0030	.0035	.0010	.0012	.0012	.0016
1.5	.05906	.0047	.0025	.0025	.0030	.0030	.0035	.0010	.0012	.0012	.0016
1.75	.06890	.0055	.0025	—	.0030	.0035	.0040	—	.0012	.0016	.0016
2	.07874	.0063	.0025	—	.0035	.0035	.0040	—	.0016	.0016	.0016
2.5	.09843	.0079	.0025	—	.0035	.0040	.0045	—	.0016	.0016	.0020
3	.11811	.0095	.0039	—	.0040	.0040	.0050	—	.0016	.0020	.0020
3.5	.13780	.0110	.0039	—	.0040	.0045	.0050	—	.0016	.0020	.0020
4	.15748	.0126	.0039	—	.0040	.0045	.0055	—	.0020	.0020	.0025
4.5	.17717	.0142	.0039	—	—	.0050	.0055	—	.0020	.0020	.0025
5	.19685	.0158	.0039	—	—	.0050	.0060	—	—	.0025	.0025
5.5	.21654	.0158	.0039	—	—	.0050	.0060	—	—	.0025	.0025
6	.23622	.0189	.0039	—	—	.0055	.0060	—	—	.0025	.0025

Thread Dimensions

nominal size & pitch		basic major diameter	basic pitch diameter	basic minor diameter	max minor diameter Class 3B internal thread	nominal size & pitch		basic major diameter	basic pitch diameter	basic minor diameter	max minor diameter Class 3B internal thread
0	80	.0600	.0519	.0438	.0514	6	32	.1380	.1177	.0974	.1140
1	64	.0730	.0629	.0527	.0623	6	36	.1380	.1200	.1019	.1165
1	72	.0730	.0640	.0550	.0635	6	40	.1380	.1218	.1055	.1186
2	56	.0860	.0744	.0628	.0737	8	32	.1640	.1437	.1234	.1389
2	64	.0860	.0759	.0657	.0753	8	36	.1640	.1460	.1279	.1416
3	48	.0990	.0855	.0719	.0845	8	40	.1640	.1478	.1315	.1437
3	56	.0990	.0874	.0758	.0865	10	24	.1900	.1629	.1359	.1516
4	32	.1120	.0917	.0714	.0880	10	28	.1900	.1668	.1436	.1604
4	36	.1120	.0940	.0759	.0919	10	30	.1900	.1684	.1467	.1630
4	40	.1120	.0958	.0795	.0939	10	32	.1900	.1697	.1494	.1641
4	48	.1120	.0985	.0849	.0968	12	24	.2160	.1889	.1619	.1807
5	40	.1250	.1088	.0925	.1062	12	28	.2160	.1928	.1696	.1857
5	44	.1250	.1102	.0955	.1079	12	32	.2160	.1957	.1754	.1895
						14	20	.2420	.2095	.1770	.1987
						14	24	.2420	.2149	.1879	.2059

Constants for Finding Pitch Diameter and Minor Diameter of Screw Threads

Basic Pitch Diameter = Basic Major Diameter – Constant for Basic Pitch Diameter for TPI

Basic Minor Diameter = Basic Major Diameter – Constant for Basic Minor Diameter for TPI

threads per inch		pitch	constant for basic pitch dia.		constant for basic minor dia.		threads per inch		pitch	constant for basic pitch dia.		constant for basic minor dia.	
inch	in	mm	Unified	ISO	Unified	ISO	inch	in	mm	Unified	ISO	Unified	ISO
–	.0079	0.2	–	.00511	–	.01022	20	.0500	–	.03248	–	.06496	–
–	.0088	0.225	–	.00575	–	.01150	18	.0555	–	.03608	–	.07216	–
–	.0098	0.25	–	.00639	–	.01278	–	.0590	1.5	–	.03836	–	.07672
–	.0118	0.3	–	.00767	–	.01534	16	.0625	–	.04060	–	.08120	–
80	.0125	–	.00812	–	.01624	–	–	.0689	1.75	–	.04475	–	.08950
–	.0138	0.35	–	.00895	–	.01790	14	.0714	–	.04639	–	.09278	–
72	.0139	–	.00902	–	.01804	–	13	.0769	–	.04996	–	.09992	–
64	.0156	–	.01015	–	.02030	–	–	.0787	2.0	–	.05117	–	.10228
–	.0157	0.4	–	.01023	–	.02046	12	.0833	–	.05413	–	.10826	–
–	.0177	0.45	–	.01151	–	.02302	11.5	.0869	–	.05648	–	.11296	–
56	.0178	–	.01160	–	.02320	–	11	.0909	–	.05905	–	.11810	–
–	.0197	0.5	–	.01279	–	.02558	–	.0984	2.5	–	.06393	–	.12786
48	.0208	–	.01353	–	.02706	–	10	.1000	–	.06495	–	.12990	–
44	.0227	–	.01476	–	.02952	–	9	.1111	–	.07217	–	.14434	–
–	.0236	0.6	–	.01534	–	.03068	–	.1181	3.0	–	.07672	–	.15344
40	.0250	–	.01624	–	.03248	–	8	.1250	–	.08119	–	.16238	–
–	.0275	0.7	–	.01790	–	.03580	–	.1378	3.5	–	.08950	–	.17900
36	.0278	–	.01804	–	.03608	–	7	.1428	–	.09279	–	.18558	–
–	.0295	0.75	–	.01918	–	.03836	–	.1575	4.0	–	.10229	–	.20458
32	.0312	–	.02030	–	.04060	–	6	.1667	–	.10825	–	.21650	–
–	.0315	0.8	–	.02046	–	.04092	–	.1772	4.5	–	.11507	–	.23014
28	.0357	–	.02320	–	.04640	–	–	.1968	5.0	–	.12786	–	.25572
27	.0370	–	.02406	–	.04812	–	5	.2000	–	.12990	–	.25980	–
–	.0394	1.0	–	.02557	–	.05114	–	.2165	5.5	–	.14064	–	.28128
24	.0417	–	.02706	–	.05412	–	4.5	.2222	–	.14434	–	.28868	–
–	.0492	1.25	–	.03196	–	.06392	–	.2362	6.0	–	.15343	–	.30353
							4	.2500	–	.16238	–	.32476	–

continued on next page

USCTI Table 352 Fractional Sizes

nominal size & TPI		basic major diameter	basic pitch diameter	basic minor diameter	max minor diameter Class 3B internal thread
1/16	64	.0625	.0524	.0422	.0518
3/32	48	.0938	.0803	.0667	.0793
1/8	40	.1250	.1088	.0925	.1062
5/32	32	.1563	.1360	.1157	.1311
5/32	36	.1563	.1382	.1202	.1339
3/16	24	.1875	.1604	.1334	.1530
3/16	32	.1875	.1672	.1469	.1616
7/32	24	.2188	.1917	.1646	.1834
7/32	32	.2188	.1985	.1782	.1922
1/4	20	.2500	.2175	.1850	.2067
1/4	24	.2500	.2229	.1959	.2139
1/4	28	.2500	.2268	.2036	.2190
1/4	32	.2500	.2297	.2094	.2229
5/16	18	.3125	.2764	.2403	.2630
5/16	20	.3125	.2800	.2476	.2680
5/16	24	.3125	.2854	.2584	.2754
5/16	32	.3125	.2922	.2719	.2847
3/8	16	.3750	.3344	.2938	.3182
3/8	20	.3750	.3425	.3100	.3297
3/8	24	.3750	.3479	.3209	.3372
3/8	32	.3750	.3547	.3344	.3469
7/16	14	.4375	.3911	.3447	.3717
7/16	20	.4375	.4050	.3726	.3916
7/16	24	.4375	.4104	.3834	.3994
7/16	28	.4375	.4143	.3911	.4051
1/2	12	.5000	.4459	.3918	.4223
1/2	13	.5000	.4500	.4001	.4284
1/2	20	.5000	.4675	.4351	.4537
1/2	24	.5000	.4729	.4459	.4619
1/2	28	.5000	.4768	.4536	.4676
9/16	12	.5625	.5084	.4542	.4843
9/16	18	.5625	.5264	.4903	.5106
9/16	24	.5625	.5354	.5084	.5244
5/8	11	.6250	.5660	.5069	.5391
5/8	12	.6250	.5709	.5168	.5463
5/8	18	.6250	.5889	.5528	.5730
5/8	24	.6250	.5979	.5709	.5869
11/16	11	.6875	.6285	.5694	.6012
11/16	12	.6875	.6334	.5793	.6085
11/16	16	.6875	.6469	.6063	.6284
11/16	24	.6875	.6604	.6334	.6494
3/4	10	.7500	.6850	.6201	.6545
3/4	12	.7500	.6959	.6418	.6707
3/4	16	.7500	.7094	.6688	.6908
3/4	20	.7500	.7175	.6850	.7037

nominal size & TPI		basic major diameter	basic pitch diameter	basic minor diameter	max minor diameter Class 3B internal thread
13/16	12	.8125	.7584	.7042	.7329
13/16	16	.8125	.7719	.7313	.7533
13/16	20	.8125	.7800	.7475	.7662
7/8	9	.8750	.8028	.7307	.7681
7/8	12	.8750	.8209	.7668	.7952
7/8	14	.8750	.8286	.7822	.8068
7/8	16	.8750	.8344	.7938	.8158
7/8	18	.8750	.8389	.8028	.8230
7/8	20	.8750	.8425	.8100	.8287
15/16	12	.9375	.8834	.8293	.8575
15/16	16	.9375	.8969	.8563	.8783
15/16	20	.9375	.9050	.8725	.8912
1	8	1.0000	.9188	.8376	.8797
1	12	1.0000	.9459	.8918	.9198
1	14	1.0000	.9536	.9072	.9315
1	16	1.0000	.9594	.9188	.9408
1	20	1.0000	.9675	.9350	.9537
1-1/16	12	1.0625	1.0084	.9543	.9823
1-1/16	16	1.0625	1.0219	.9813	1.0033
1-1/16	18	1.0625	1.0264	.9903	1.0105
1-1/8	7	1.1250	1.0322	.9394	.9875
1-1/8	8	1.1250	1.0438	.9626	1.0047
1-1/8	12	1.1250	1.0709	1.0168	1.0448
1-1/8	16	1.1250	1.0844	1.0438	1.0658
1-1/8	18	1.1250	1.0889	1.0528	1.0730
1-3/16	12	1.1875	1.1334	1.0793	1.1073
1-3/16	16	1.1875	1.1469	1.1063	1.1283
1-3/16	18	1.1875	1.1514	1.1153	1.1355
1-1/4	7	1.2500	1.1572	1.0644	1.1125
1-1/4	8	1.2500	1.1688	1.0876	1.1297
1-1/4	12	1.2500	1.1959	1.1418	1.1698
1-1/4	16	1.2500	1.2094	1.1688	1.1908
1-1/4	18	1.2500	1.2139	1.1778	1.1980
1-5/16	12	1.3125	1.2584	1.2043	1.2323
1-5/16	16	1.3125	1.2719	1.2313	1.2533
1-5/16	18	1.3125	1.2764	1.2403	1.2605
1-3/8	6	1.3750	1.2667	1.1585	1.2146
1-3/8	8	1.3750	1.2938	1.2126	1.2547
1-3/8	12	1.3750	1.3209	1.2668	1.2948
1-3/8	16	1.3750	1.3344	1.2938	1.3158
1-3/8	18	1.3750	1.3389	1.3028	1.3230
1-7/16	12	1.4375	1.3834	1.3293	1.3573
1-7/16	16	1.4375	1.3969	1.3563	1.3783
1-7/16	18	1.4375	1.4014	1.3653	1.3855

nominal size & TPI		basic major diameter	basic pitch diameter	basic minor diameter	max minor diameter Class 3B internal thread
1-1/2	6	1.5000	1.3917	1.2835	1.3396
1-1/2	8	1.5000	1.4188	1.3376	1.3797
1-1/2	12	1.5000	1.4459	1.3918	1.4198
1-1/2	16	1.5000	1.4594	1.4188	1.4408
1-1/2	18	1.5000	1.4639	1.4278	1.4480
1-1/2	16	1.5625	1.5219	1.4813	1.5033
1-1/2	18	1.5625	1.5264	1.4903	1.5105
1-5/8	6	1.6250	1.5167	1.4085	1.4646
1-5/8	8	1.6250	1.5438	1.4626	1.5047
1-5/8	12	1.6250	1.5709	1.5168	1.5448
1-5/8	16	1.6250	1.5844	1.5438	1.5658
1-5/8	18	1.6250	1.5889	1.5528	1.5730
1-11/16	16	1.6875	1.6469	1.6063	1.6283
1-11/16	18	1.6875	1.6514	1.6153	1.6355
1-3/4	5	1.7500	1.6201	1.4902	1.5575
1-3/4	8	1.7500	1.6688	1.5876	1.6297
1-3/4	12	1.7500	1.6959	1.6418	1.6698
1-3/4	16	1.7500	1.7094	1.6688	1.6908
1-13/16	16	1.8125	1.7719	1.7313	1.7533
1-7/8	8	1.8750	1.7938	1.7126	1.7547
1-7/8	12	1.8750	1.8209	1.7668	1.7948
1-7/8	16	1.8750	1.8344	1.7938	1.8158
1-15/16	16	1.9375	1.8969	1.8563	1.8783
2	4-1/2	2.0000	1.8557	1.7113	1.7861
2	8	2.0000	1.9188	1.8376	1.8797
2	12	2.0000	1.9459	1.8918	1.9198
2	16	2.0000	1.9594	1.9188	1.9408
2-1/16	16	2.0625	2.0219	1.9813	2.0033
2-1/8	8	2.1250	2.0438	1.9626	2.0047
2-1/8	12	2.1250	2.0709	2.0168	2.0448
2-1/8	16	2.1250	2.0844	2.0438	2.0658
2-3/16	16	2.1875	2.1469	2.1063	2.1283
2-1/4	4-1/2	2.2500	2.1057	1.9613	2.0361
2-1/4	8	2.2500	2.1688	2.0876	2.1297
2-1/4	12	2.2500	2.1959	2.1418	2.1698
2-1/4	16	2.2500	2.2094	2.1688	2.1908
2-5/16	16	2.3125	2.2719	2.2313	2.2533
2-3/8	12	2.3750	2.3209	2.2668	2.2948
2-3/8	16	2.3750	2.3344	2.2938	2.3158
2-7/16	16	2.4375	2.3969	2.3563	2.3783
2-1/2	4	2.5000	2.3376	2.1752	2.2594
2-1/2	8	2.5000	2.4188	2.3376	2.3797
2-1/2	12	2.5000	2.4459	2.3918	2.4198
2-1/2	16	2.5000	2.4594	2.4188	2.4408

nominal size & TPI		basic major diameter	basic pitch diameter	basic minor diameter	max minor diameter Class 3B internal thread
2-5/8	12	2.6250	2.5709	2.5168	2.5448
2-5/8	16	2.6250	2.5844	2.5438	2.5658
2-3/4	4	2.7500	2.5876	2.4252	2.5094
2-3/4	8	2.7500	2.6688	2.5876	2.6297
2-3/4	12	2.7500	2.6959	2.6418	2.6698
2-3/4	16	2.7500	2.7094	2.6688	2.6908
2-7/8	12	2.8750	2.8209	2.7668	2.7948
2-7/8	16	2.8750	2.8344	2.7938	2.8158
3	4	3.0000	2.8376	2.6752	2.7594
3	8	3.0000	2.9188	2.8376	2.8797
3	12	3.0000	2.9459	2.8918	2.9198
3	16	3.0000	2.9594	2.9188	2.9408
3-1/8	12	3.1250	3.0709	3.0168	3.0448
3-1/8	16	3.1250	3.0844	3.0438	3.0658
3-1/4	4	3.2500	3.0876	2.9252	3.0094
3-1/4	8	3.2500	3.1688	3.0876	3.1297
3-1/4	12	3.2500	3.1959	3.1418	3.1698
3-1/4	16	3.2500	3.2094	3.1688	3.1908
3-3/8	12	3.3750	3.3209	3.2668	3.2948
3-3/8	16	3.3750	3.3344	3.2938	3.3158
3-3/8	4	3.5000	3.3376	3.1752	3.2594
3-1/2	8	3.5000	3.4188	3.3376	3.3797
3-1/2	12	3.5000	3.4459	3.3918	3.4198
3-1/2	16	3.5000	3.4594	3.4188	3.4408
3-5/8	12	3.6250	3.5709	3.5168	3.5448
3-5/8	16	3.6250	3.5844	3.5438	3.5658
3-3/4	4	3.7500	3.5876	3.4252	3.5094
3-3/4	8	3.7500	3.6688	3.5876	3.6297
3-3/4	12	3.7500	3.6959	3.6418	3.6698
3-3/4	16	3.8750	3.7094	3.6686	3.6908
3-7/8	12	3.8750	3.8209	3.7669	3.7948
3-7/8	16	3.8750	3.8344	3.7938	3.8158
4	4	4.0000	3.8376	3.6752	3.7594
4	8	4.0000	3.9188	3.8376	3.8797
4	12	4.0000	3.9459	3.8918	3.9198
4	16	4.0000	3.9594	3.9188	3.9408
4	16	1.8125	1.7719	1.7313	1.7533




How to request Made-to-Order taps:

Information required for every order:

- quantity
- ordering number

**Made To Order
Taps Available**



Information required for some tool styles:

- exact tool size
- threads per inch
- pitch
- thread form
- right- or left-hand
- limit
- pitch diameter
- class of fit
- chamfer
- number of chamfered threads
- chamfer angle
- number of lube grooves
- short projections

Other features available:

- surface treatment
- special hook
- male centers removed
- special back tape
- recessed neck
- shank flats
- special shank diameter
- special rake
- thread relief
- interrupted threads
- controlled root
- ETTCO notch
- shank grooves

Special Taps

Call for a Quote

Prices for special taps are available upon request. Special taps can be furnished in quantities to meet your specific requirements. All special metric taps will produce internal threads which conform to ISO, ISO modified, and the obsolete OMFS thread systems and are manufactured to USCTI

standard blank dimensions to fit the tap holders and machine spindles now in use in the USA.



**Call Customer Service at
800.348.2885 for your quote**





Ground Thread Tap Limits

All standard ground thread taps made to USCTI Tables 327 and 329 will be marked **G** to designate ground thread. **G** will be followed by **H** to designate above basic or **L** for below basic and a numeral to designate the pitch diameter limits. For example: **G H3** indicates a ground thread tap with pitch diameter limits .0010" to .0015" over basic. See table at right.

For taps over 1-1/2" diameter with H or L limit numbers, divide the the H or L limit number by 2 to get the amount (in thousandths of an inch) the maximum tap pitch diameter is over basic for the H series or under basic for the L series. In H series taps, the tolerance shown in USCTI Table 331, Column D, **subtracted** from the maximum pitch diameter will give the minimum pitch diameter. In L series taps the tolerance shown in Table 331, Column D, **added** to the minimum pitch diameter will give the maximum pitch diameter. These taps will be marked with the appropriate H or L limit number.

Pitch Diameter Limits

for taps through 1" diameter

L1 =	basic to basic - .0005
H1 =	basic to basic + .0005
H2 =	basic + .0005 to basic + .0010
H3 =	basic + .0010 to basic + .0015
H4 =	basic + .0015 to basic + .0020
H5 =	basic + .0020 to basic + .0025
H6 =	basic + .0025 to basic + .0030

for taps over 1" diameter through 1-1/2" diameter

H4 =	basic + .0010 to basic + .0020
------	--------------------------------



The Proper Use of Lubricants in Tapping

Applying the proper lubricants in tapping operations can result in longer tap life, increased production, better workpiece size control, smoother and more accurate threads, less resharping, and more efficient chip removal. Generally, for best tap performance, straight cutting oil should be used. For non-ferrous and non-metallic materials, a coolant or a cutting fluid (light oil or soluble oil) is recommended.

Often, machining centers are equipped with a coolant or a cutting fluid that contains enough water and oil to provide adequate cooling and lubrication for a variety of tools and workpieces. However, most soluble blends are not suitable for tapping applications. Tapping, especially with thread-forming taps, requires more lubrication than cooling. A coolant or cutting fluid might lack the lubrication necessary to obtain acceptable tool life and part finish. Get recommendations from a coolant specialist.

After you select the proper lubricant, choose the right method of application and pressure. For tapping, use multiple nozzles around the tap. Nozzles should be as close to the surface of the part as possible, positioned at an angle close to the axis of the tool, and should point directly into the hole to flush chips from the flutes. For horizontal tapping, where the tap is stationary and the workpieces rotate, consider using two streams of lubricant, one on each side of the tap.

Whether you are tapping vertically, horizontally, or at an angle, make sure the lubricant reaches the cutting lands of the tap at all times, especially at the point or chamfered sections. Brushing or squirting oil or fluid onto the tap does not provide sufficient lubrication. In fact, heavy viscosity oil may cause the chips to stick or cling to a tap, increasing the chance of breakage. In addition,

if the lubricant is automatically applied only on the forward motion of the tap, time the application of the lubricant so that it will reach the hole before the tap starts to cut, particularly with machines on which the cutting fluid is automatically shut off when the tap reverses. For maximum effectiveness, it is better to force the lubricant into the hole under pressure, which will vary depending on the tapping method, hole depth, and tapping speed.

Keep tapping lubricants as clean as possible using a filtering system or other equipment. Dust and other foreign particles can contaminate oil and decrease its effectiveness. Thoroughly clean machines and oil tanks when adding new lubricant and at regular intervals to ensure optimum results.

Important Update: All products in this catalog are Center Cutting (CC) End Mills.

In the past Greenfield has sold HSS End Mills in two brands, Cleveland and Putnam. In late 2016, most items sold in the Putnam Catalog were moved into the Cleveland Catalog, and the Putnam Brand will no longer be sold as a separate brand. A move was also made to manufacture all end mills as Center Cutting. However, Non-Center Cutting (NCC) End Mills, especially in the Putnam Brand, may still be available, while quantities last. Please inquire on purchasing if the product you are buying is available as a NCC End Mill. If the item you desire is not in this catalog, please inquire of our capability to make your item as a special.



Carbide End Mills

Our carbide end mills were included in our 2017 Cleveland™ Catalog. Our end mills are designed to machine a broad range of materials and are manufactured out of premium grade carbide material.



TECH TIP

Flute Selection: The selection of a tool with the proper number of flutes for any round tool is important. A two fluted tool will always have the greatest amount of chip space, and therefore should be the tool of choice in soft materials, or in situations where the tool will be run more than several diameters of itself deep. On the other hand, the two fluted tool will usually be the weaker tool because of the thinner cross section of web. Tools with more flutes (3,4,6,8, etc) will have a stronger backbone because those flutes are more shallow and provide much more cutting action. This will lead one to use a tool with more than two flutes in harder, tougher materials, or where stronger tools and less chip space are required.

TECH TIP

Understanding Chip Load per Tooth/Tool

1. Every material has an appropriate amount of stock that can be removed in milling. This rate of removal is defined as feed or chip load.
2. Chip load per tooth (CLT) is the selected maximum depth of cut for material removed by one cutting edge in one revolution of the tool.
3. This amount can vary per material, size of the end mill or number of flutes. Softer materials afford higher CLT compared to harder, tougher materials. Larger diameter tools afford higher CLT also.
4. Greenfield Industries' catalogs have charts to help determine chip load per tooth starting points. See the Speed & Feed data in the technical section.
5. Chip Load per Tool is simply the CLT per tooth X the number of cutting faces contained on the end mill. Increasing the number of cutting edges also increases inches per minute/production rate.

Here are a couple of examples: 1/4 diameter, 2 flute end mill in aluminum CLT is .0005 to .002 @200-600 SFM, 3056-9168 RPM Using .002 CLT x 2 flutes = .004 chip load per tool @6,000 RPM =24 Inches per minute
1/4 diameter, change to a 3 flute tool .002 CLT x 3 flutes = .006 chip load per tool @6,000 RPM = 36 Inches per minute.


End Mill Product Index210-213
High Speed Steel, Cobalt, and Carbide

Miniature	Left Hand Cut
General Purpose	Variable Index
Finishers	Engraving Tool
Roughers	Chamfer Tool
Left Hand Helix	


Technical Information

Nomenclature	306
End Mill Finishes and Their Applications	308
Speeds and Feeds	309
Operating Parameters	310
Operating Parameters, HSS and Cobalt	311
Operating Parameters, PM Plus™, HSS & Cobalt	313
End Mill Selection and Use	314
Carbide	
Operating Parameters, Variable Index	
Style CEM-V-4 (R and B), CEM-V2-5R	315
Style CEM-HPDE-5, CEM-EMS (-3 and -5)	316
Style CEM-AM (2 and 3)	317
Style CEM-R (S and A)	318
Operating Parameters, General Purpose	316
Regrinding End Mills	320


TECH TIPS

Flute Selection	208
Understanding Chip Load per Tooth/Tool	208
Reducing Vibration & Chatter.	208
Using Drill Mills.	235
Benefits of Multi Flute End Mill.	239, 261
Using Style HG-4LL End Mill	242
Miniature End Mill Features	245
PM Plus™ High-Performance	
End Mills Deliver Superior Performance.	259
The PM-539 Advantage	265
Reducing Vibration & Chatter.	308

Surface Treatment


Additional treatments available upon request.



High Speed Steel

High Speed Steel					End Work				Application				Machining						Surface Treatment						
	Type	Style	Page	No. of Flutes	Square	Ball	Chamfer	Radius/Rounding	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiN	TiCN	TiAlN
	Miniature	HMD-2	216	2	•				•	•	•				•	•	•	•			•	•			•
	Miniature	HMD-2B	217	2		•			•	•	•				•	•	•	•			•	•			
	Miniature	HMD-4	218	4	•				•	•	•					•		•				•			
	Miniature	HMG-2	219	2	•				•	•					•	•	•	•				•			
	Miniature	HMG-2B	220	2		•			•						•	•	•	•			•	•			
	Miniature	HMG-4	221	4	•				•	•						•		•				•			
	Finisher	HD-2	222	2	•				•	•	•				•	•	•	•				•	•	•	
	Finisher	HD-2B	224	2		•			•	•	•				•	•	•	•			•	•	•	•	
	Finisher	HD-3	225	3	•				•	•	•				•	•		•	•			•	•	•	
	Finisher	HD-4C	226	4	•				•	•	•					•		•				•	•	•	
	Finisher	HG-2	227	2	•				•	•	•				•	•	•	•				•	•	•	
	Finisher	HG-2M	230	2	•				•	•	•				•	•	•	•				•			
	Finisher	HG-2B	231	2		•			•	•	•				•	•	•	•				•	•	•	
	Keyway	HG-2K	232	2	•				•	•	•				•	•	•	•				•	•	•	
	Keyway Cutter	HG-2KS	233	2	•				•	•	•				•							•			
	Finisher - Extended Neck	HGN-2	234	2	•				•	•	•				•	•	•	•				•			
	Finisher - Extended Neck	HGN-2B	235	2		•			•	•	•				•	•	•	•				•			
	Finisher - High Helix	HGA-2	236	2	•				•	•	•				•	•	•	•				•	•	•	
	Finisher - Drill Mill	HPDM-2	237	2	Pointed end				•	•	•				•		•		•			•	•	•	
	General Purpose	HG-3	238	3	•				•	•	•				•	•		•				•	•	•	

High Speed Steel (continued)					End Work			Application					Machining					Surface Treatment							
		Type	Style	Page	No. of Flutes	Square Ball	Chamfer	Radius/Rounding	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiN	TiCN	TiAlN
	General Purpose	HG-4C	239	M	•				•	•	•	•			•	•	•					•	•	•	
	General Purpose	HG-4MC	242	4	•				•	•	•	•			•	•	•					•	•	•	
	General Purpose	HG-4B	243	4		•			•	•	•	•			•	•	•					•	•	•	
	Left Hand Helix / Cut	HG-4LL	244	4	•				•	•	•	•			•	•	•					•	•	•	
	Corner Radius	CRE	245	4				•	•	•	•	•			•	•	•					•	•	•	

M = Multi Flute

Cobalt					End Work				Application					Machining					Surface Treatment						
	Type	Style	Page	No. of Flutes	Square	Ball	Chamfer	Radius	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiN	TiCN	TiAlN
	Miniature End Mill	HMDC-2	246	2	•				•	•	•	•	•		•	•	•					•	•	•	
	Miniature End Mill	HMDC-4	247	4	•				•	•	•	•	•			•		•				•	•	•	
	Finisher	HDC-2	248	2	•				•	•	•	•	•		•	•	•	•				•	•	•	
	Finisher	HDC-4C	249	4	•				•	•	•	•	•			•		•				•	•	•	
	Finisher	HGC-2	250	2	•				•	•	•	•	•		•	•	•	•				•	•	•	
	Finisher	HGC-2B	252	2		•			•	•	•	•	•		•	•	•	•				•	•	•	
	Finisher	HGC-4C	253	M	•				•	•	•	•	•			•		•				•	•	•	
	Finisher	HGC-4B	255	M		•			•	•	•	•	•			•		•				•	•	•	
	Rougher Fine Pitch	RG6	256	M	•				•	•	•	•	•			•		•				•	•	•	
	Rougher Course Pitch	RG8	257	M			•		•	•	•	•	•			•		•	•			•	•	•	
	Rougher - Extra Course Pitch	RG9	259	3			•		•	•	•	•	•			•		•	•			•	•	•	

M = Multi Flute

Powdered Metal


Powdered Metal				End Work				Application					Machining					Surface Treatment							
	Type	Style	Page	No. of Flutes	Square	Ball	Chamfer	Radius	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiN	TiCN	TiAlN
	Finisher	PM-4DE	260	4	•				•	•	•	•	•	•		•		•				•		•	
	Finisher	PM-2	261	2	•				•	•	•	•	•	•	•	•	•	•				•	•	•	
	Finisher	PM-3	262	3	•				•	•	•	•	•	•	•	•		•				•		•	
	Finisher	PM-4	263	M	•				•	•	•	•	•	•		•		•				•	•	•	
	Finisher	PM-4B	265	4		•			•	•	•	•	•	•		•		•				•		•	
	Finisher High Helix	PM-539R	266	3	•			•	•	•	•	•	•	•	•	•	•	•		•		•		•	
	Finisher - Left - High Helix/Cut	PM-539L	267	3	•				•	•	•	•	•	•	•	•	•	•				•		•	
	Rougher Course Profile	PMRC-C	268	M	•				•	•	•	•	•	•		•		•				•	•	•	
	Rougher Fine Profile	PMRF-C	269	M	•				•	•	•	•	•	•		•		•	•			•		•	•
	Rougher Course Profile	PM-538R	270	3	•			•	•	•	•	•	•	•	•	•	•	•			•	•		•	
	Rougher - Left Low Helix/Cut	PM-538L	271	3	•			•	•	•	•	•	•	•	•	•	•	•			•	•			

M = Multi Flute

Carbide


Carbide				End Work				Application					Machining					Surface Treatment									
Tolerances for Solid Carbide End Mills Cutting Diameter: 1/32" through 1": +0.000 - 0.002 Shank Diameter: h6				No. of Flutes	Square	Ball	Chamfer	Radius	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiCN	TiAlN	AlCrN	ZrN	
	Variable Index Ferrous Material	CEM-V-4R	272		4	•			•	•	•		•	•	•	•	•				•	•		•			
	Variable Index Ferrous Material	CEM-V-4B	275		4		•			•	•		•	•	•	•	•				•	•		•			
	Variable Index Ferrous Material	CEM-V2-5R	276		5	•			•	•	•		•	•	•	•	•				•	•		•			
	Steel Material	CEM-HPDE-5	278		5	•				•	•			•		•		•				•	•		•		
	Steel Material	CEM-EMS-3	279		3	•			•	•	•			•	•	•	•	•				•	•		•		
	Steel Material	CEM-EMS-5	280		5	•				•	•				•	•	•					•	•		•		

Carbide (continued)

Carbide (continued)					End Work				Application					Machining					Surface Treatment							
	Type	Style	Page	No. of Flutes	Square	Ball	Chamfer	Radius	Steel	Stainless	Cast Iron	Non-Ferrous	High-Temp Alloy	Hardened Steel	Slot	Profile	Plunging	Ramping	Drilling	Chamfer	Slot w/ Radius	Bright	TiCN	TiAlN	AlCrN	ZrN
	Aluminum Material	CEM-AM2	281	2	•							•			•	•	•	•				•	•			
	Aluminum Material	CEM-AM3	282	3	•							•			•	•	•	•				•				•
	Rougher	CEM-RS	283	4	•				•	•				•	•	•	•					•		•		
	Rougher	CEM-RA	284	3	•					•		•			•	•	•					•	•			
	General Purpose	CEM-DE2	285	2	•				•	•	•				•	•	•					•		•		
	General Purpose	CEM-DE2B	286	2		•			•	•	•				•	•	•				•	•		•		
	General Purpose	CEM-DE4	287	4	•				•	•	•			•	•	•						•		•		
	General Purpose	CEM-DE4B	288	4		•			•	•	•				•	•	•				•	•		•		
	Miniature	CMCE-2	289	2	•				•	•	•	•	•	•	•	•	•					•		•		
	General Purpose	CEM-SE2	291	2	•			•	•	•	•				•	•	•	•			•	•		•		
	General Purpose	CEM-SE2B	293	2		•			•	•	•	•			•	•	•				•	•		•		
	General Purpose	CEM-SE3	295	3	•			•	•	•	•	•			•	•	•				•	•		•		
	Miniature	CMCE-4	296	4	•				•	•	•	•	•	•	•	•	•					•		•		
	General Purpose	CEM-SE4	298	4	•			•	•	•	•	•			•	•	•					•		•		
	General Purpose	CEM-SE4B	301	4		•			•	•	•	•			•	•	•				•	•		•		
	Straight Flute	CEM-SEST2	303	2					•	•	•	•		•	•	•		•				•		•		
	Engraving Tool	CEM-EG2	303	2		•			•		•	•			•						•	•				
	Chamfer Tool	CEM-CH2	304	2			•		•		•									•		•				
	Chamfer Tool	CEM-CH2D	304	2			•		•		•									•		•				
	Chamfer Tool	CEM-CH4	305	4			•		•		•			•						•		•				
	Chamfer Tool	CEM-CH4D	305	4			•		•		•			•						•		•				

M = Multi Flute

HSS

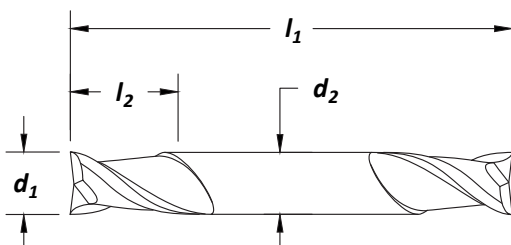ANSI
SIZESSurface
Treatment

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number HMD-2	
						Bright	TiCN
1/32	.0312	.188	.047	2.000	2	C41001	C39851
1/32	.0312	.188	.094	2.250	2	C41032	C39883
3/64	.0469	.188	.063	2.000	2	C41003	C39852
3/64	.0469	.188	.141	2.250	2	C41034	C39884
1/16	.0625	.188	.094	2.000	2	C41005	C39853
1/16	.0625	.188	.188	2.250	2	C41036	C39885
1/16	.0625	.188	.219	2.500	2	C41070	C39909
5/64	.0781	.188	.125	2.000	2	C41006	C39854
5/64	.0781	.188	.234	2.250	2	C41037	C39886
3/32	.0938	.188	.141	2.000	2	C41008	C39855
3/32	.0938	.188	.281	2.250	2	C41039	C39887
3/32	.0938	.188	.281	2.625	2	C41072	C39910
7/64	.1094	.188	.156	2.000	2	C41010	C39856
7/64	.1094	.188	.328	2.250	2	C41041	C39888
1/8	.1250	.188	.188	2.000	2	C41012	C39857
1/8	.1250	.188	.375	2.250	2	C41043	C39889
1/8	.1250	.188	.750	3.125	2	C41075	C39911
9/64	.1406	.188	.219	2.000	2	C41013	C39858
9/64	.1406	.188	.406	2.250	2	C41044	—
5/32	.1562	.188	.234	2.000	2	C41014	—
5/32	.1562	.188	.438	2.250	2	C41045	C39891
5/32	.1562	.188	.875	3.250	2	C41076	C39912
11/64	.1719	.188	.250	2.000	2	C41016	C39860
11/64	.1719	.188	.500	2.250	2	C41047	C39892
3/16	.1875	.188	.281	2.000	2	C41017	C39861
3/16	.1875	.188	.500	2.250	2	C41048	C39893


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright	◆		◆				◆		◆			
	TiCN	☆		☆				☆		☆			

☆ = Best Performance ◆ = Acceptable

Style: HMD-2B - Double End
Miniature

HSS

ANSI
SIZES

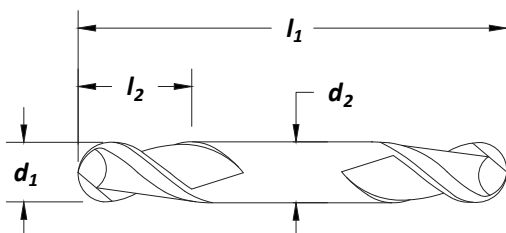Surface
Treatment


cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number HMD-2B Bright
1/32	.0313	.188	.047	2.000	2	C75323
1/32	.0313	.188	.094	2.250	2	C75324
1/16	.0625	.188	.094	2.000	2	C41021
1/16	.0625	.188	.188	2.250	2	C41053
1/16	.0625	.188	.218	2.500	2	C75325
3/32	.0938	.188	.141	2.000	2	C41023
3/32	.0938	.188	.281	2.250	2	C41056
1/8	.1250	.188	.188	2.000	2	C41026
1/8	.1250	.188	.375	2.250	2	C41060
1/8	.1250	.188	.750	3.125	2	C75326
5/32	.1562	.188	.438	2.250	2	C41061
3/16	.1875	.188	.281	2.000	2	C41029
3/16	.1875	.188	.500	2.250	2	C41063
3/16	.1875	.188	1.00	3.375	2	C75327


High Speed Steel

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	☆		☆					☆		☆			

☆ = Best Performance ◆ = Acceptable

HSS

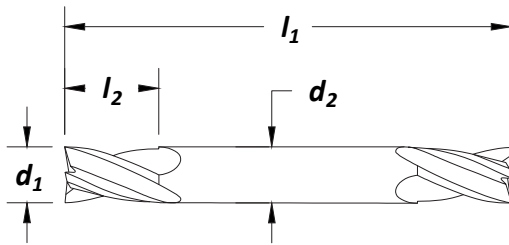ANSI
SIZESSurface
Treatment

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number HMD-4 Bright
1/16	.0625	.188	.094	2.000	4	C41085
1/16	.0625	.188	.188	2.250	4	C41099
1/16	.0625	.188	.219	2.500	4	C41113
3/32	.0938	.188	.141	2.000	4	C41087
3/32	.0938	.188	.281	2.250	4	C41101
3/32	.0938	.188	.281	2.625	4	C41115
1/8	.1250	.188	.188	2.000	4	C41090
1/8	.1250	.188	.375	2.250	4	C41104
1/8	.1250	.188	.750	3.125	4	C41118
5/32	.1562	.188	.234	2.000	4	C41091
5/32	.1562	.188	.438	2.250	4	C41105
5/32	.1562	.188	.875	3.250	4	C41119
3/16	.1875	.188	.281	2.000	4	C41093
3/16	.1875	.188	.500	2.250	4	C41107
3/16	.1875	.188	1.000	3.375	4	C75328

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	☆		☆				☆		☆			


☆ = Best Performance

◆ = Acceptable

Style: HMG-2 - Single End
Miniature

HSS

ANSI
SIZES

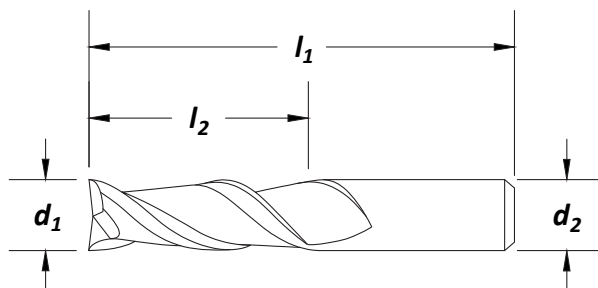Surface
Treatment


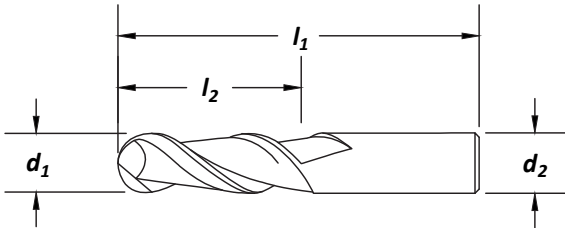
cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number HMG-2 Bright
1/32	.0312	.188	.094	1.500	2	C40843
3/64	.0469	.188	.062	1.500	2	C75329
3/64	.0469	.188	.141	1.500	2	C40844
1/16	.0625	.188	.094	1.500	2	C75330
1/16	.0625	.188	.188	1.500	2	C40845
5/64	.0781	.188	.234	1.500	2	C40846
3/32	.0938	.188	.141	1.500	2	C75331
3/32	.0938	.188	.281	1.500	2	C40847
7/64	.1094	.188	.328	1.500	2	C40848
1/8	.1250	.188	.375	1.500	2	C40849
9/64	.1406	.188	.250	1.500	2	C75332
9/64	.1406	.188	.406	1.500	2	C40850
5/32	.1562	.188	.250	1.500	2	C75333
5/32	.1562	.188	.438	1.500	2	C40851
11/64	.1719	.188	.500	1.500	2	C40852
3/16	.1875	.188	.281	1.500	2	C75334
3/16	.1875	.188	.500	1.500	2	C40853

High Speed Steel

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Bright													
☆ = Best Performance ◆ = Acceptable													

HSS

ANSI
SIZESSurface
Treatment

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number HMG-2B Bright
1/32	.0312	.188	.094	1.500	2	C75335
1/16	.0625	.188	.094	1.500	2	C75336
1/16	.0625	.188	.188	1.500	2	C75337
3/32	.0938	.188	.141	1.500	2	C75338
3/32	.0938	.188	.281	1.500	2	C75339
1/8	.1250	.188	.188	1.500	2	C75340
1/8	.1250	.188	.375	1.500	2	C75341
5/32	.1562	.188	.438	1.500	2	C75342
3/16	.1875	.188	.563	1.500	2	C75343


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright													

☆ = Best Performance ◆ = Acceptable

Style: HMG-4 - Single End
Miniature

HSS

ANSI
SIZES

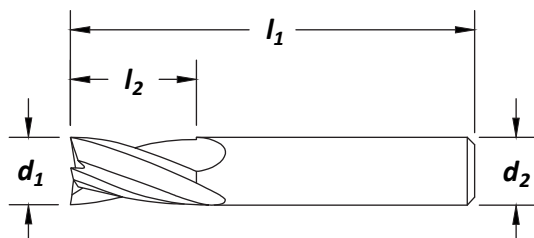Surface
Treatment


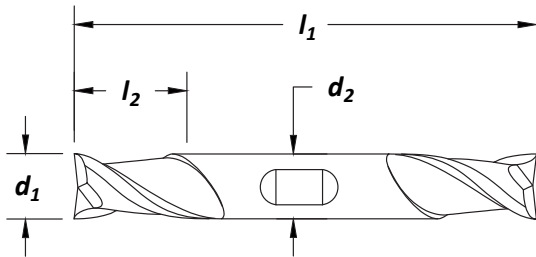
cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number HMG-4 Bright
1/16	.0625	.188	.188	1.500	4	C40876
5/64	.0781	.188	.234	1.500	4	C40877
3/32	.0938	.188	.281	1.500	4	C40878
7/64	.1094	.188	.328	1.500	4	C40879
1/8	.1250	.188	.375	1.500	4	C40880
9/64	.1406	.188	.406	1.500	4	C40881
5/32	.1562	.188	.438	1.500	4	C40882
11/64	.1719	.188	.500	1.500	4	C40883
3/16	.1875	.188	.500	1.500	4	C40884

High Speed Steel

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright													
☆ = Best Performance ◆ = Acceptable													

HSS

ANSI
SIZESSurface
Treatment

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						Bright	HD-2 TiN	TiCN
1/8	.1250	.375	.188	2.750	2	C42096	C39044	C39049
1/8	.1250	.375	.375	3.063	2	C42051	C33648	C33689
9/64	.1406	.375	.438	3.125	2	C33626	C33649	C33690
5/32	.1562	.375	.234	2.750	2	C42097	C39045	C39050
5/32	.1562	.375	.438	3.125	2	C42052	C33650	C33691
11/64	.1719	.375	.438	3.250	2	C33627	C33651	C33692
3/16	.1875	.375	.281	2.750	2	C42099	C39046	C39051
3/16	.1875	.375	.438	3.250	2	C42054	C33652	C33693
13/64	.2031	.375	.500	3.250	2	C42055	C33653	C33694
7/32	.2188	.375	.328	2.875	2	C42101	C39047	C39052
7/32	.2188	.375	.500	3.250	2	C42056	C33654	C33695
15/64	.2344	.375	.500	3.375	2	C33629	C33655	C33696
1/4	.2500	.375	.375	2.875	2	C42103	C39048	C39053
1/4	.2500	.375	.500	3.375	2	C42058	C33656	C33697
17/64	.2656	.375	.563	3.375	2	C33630	C33657	C33698
9/32	.2812	.375	.563	3.375	2	C42060	C33658	C33699
19/64	.2969	.375	.563	3.500	2	C33631	C33659	C33700
5/16	.3125	.375	.563	3.500	2	C42061	C33660	C33701
21/64	.3281	.375	.563	3.500	2	C33632	C33661	C33702
11/32	.3438	.375	.563	3.500	2	C42063	C33662	C33703
23/64	.3594	.375	.563	3.500	2	C33633	C33663	C33704
3/8	.3750	.375	.563	3.500	2	C42065	C33664	C33705
25/64	.3906	.500	.813	4.125	2	C33634	C33665	C33706
13/32	.4062	.500	.813	4.125	2	C42067	C33666	C33707
27/64	.4219	.500	.813	4.125	2	C33635	C33667	C33708
7/16	.4375	.500	.813	4.125	2	C42069	C33668	C33709
15/32	.4688	.500	.813	4.125	2	C42070	C33670	C33711
31/64	.4844	.500	.813	4.125	2	C33637	C33671	C33712
1/2	.5000	.500	.813	4.125	2	C42072	C33672	C33713
17/32	.5312	.625	1.125	5.000	2	C33638	C33673	C33714
9/16	.5625	.625	1.125	5.000	2	C42074	C33674	C33715

continued on next page

Style: HD-2 - Double End (continued)
Finisher


diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						Bright	HD-2 TiN	TiCN
19/32	.5938	.625	1.125	5.000	2	C33639	C33675	C33716
5/8	.6250	.625	1.125	5.000	2	C42076	C33676	C33717
21/32	.6562	.750	1.313	5.625	2	C33640	C33677	C33718
11/16	.6875	.750	1.313	5.625	2	C42078	C33678	C33719
23/32	.7188	.750	1.313	5.625	2	C33641	C33679	C33720
3/4	.7500	.750	1.313	5.625	2	C42080	C33680	C33721
13/16	.8125	.875	1.563	6.125	2	C33643	C33682	C33723
7/8	.8750	.875	1.563	6.125	2	C42084	C33684	C33725
15/16	.9375	1.000	1.625	6.375	2	C33646	C33686	C33727
1	1.0000	1.000	1.625	6.375	2	C42088	C33688	C33729

High Speed Steel
Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32				>45
TiN	★		★					★					
TiCN	☆		☆					☆		★			

☆ = Best Performance ★ = Acceptable

HSS

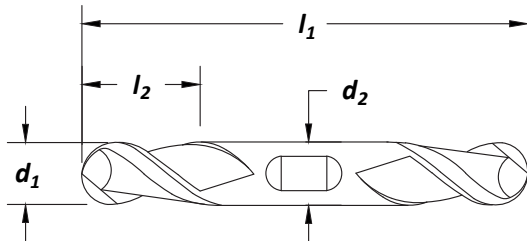ANSI
SIZESSurface
Treatment


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						HD-2B Bright	TiN	TiCN
1/8	.1250	.375	.1875	3.125	2	C75117	C75120	C75123
1/8	.1250	.375	.375	3.063	2	C42184	C39142	C39158
5/32	.1562	.375	.438	3.125	2	C39136	C39143	C39159
3/16	.1875	.375	.281	3.250	2	C75118	C75121	C75124
3/16	.1875	.375	.438	3.250	2	C42186	C39144	C39160
7/32	.2188	.375	.500	3.250	2	C39137	C39145	C39161
1/4	.2500	.375	.375	3.375	2	C75119	C75122	C75125
1/4	.2500	.375	.500	3.375	2	C42189	C39146	C39162
9/32	.2812	.375	.563	3.375	2	C39138	C39147	C39163
5/16	.3125	.375	.563	3.500	2	C42191	C39148	C39164
11/32	.3438	.375	.563	3.500	2	C39139	C39149	C39165
3/8	.3750	.375	.563	3.500	2	C42194	C39150	C39166
13/32	.4062	.500	.813	4.125	2	C39140	C39151	C39167
7/16	.4375	.500	.813	4.125	2	C42197	C39152	C39168
1/2	.5000	.500	.813	4.125	2	C42199	C39153	C39169
5/8	.6250	.625	1.125	5.000	2	C42202	C39154	C39170
3/4	.7500	.750	1.313	5.625	2	C42205	C39155	C39171
7/8	.8750	.875	1.563	6.125	2	C39141	C39156	C39172
1	1.0000	1.000	1.625	6.375	2	C42212	C39157	C39173

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
TiN	◆		◆					◆					
TiCN	☆		☆					☆		◆			
☆ = Best Performance ◆ = Acceptable													

Style: HD-3 - Double End
Finisher

HSS

ANSI
SIZES

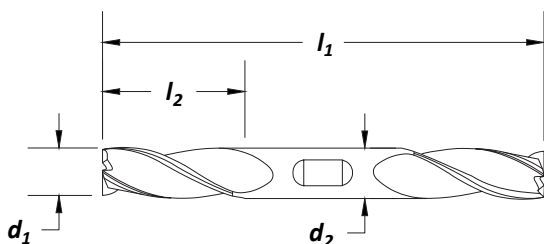**Surface
Treatment**


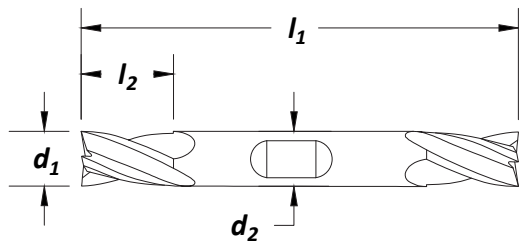
cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						HD-3 Bright	TiN	TiCN
1/8	.1250	.375	.375	3.063	3	C39575	C39596	C39617
5/32	.1562	.375	.438	3.250	3	C39576	C39597	C39618
3/16	.1875	.375	.500	3.250	3	C39577	C39598	C39619
7/32	.2188	.375	.563	3.250	3	C39578	C39599	C39620
1/4	.2500	.375	.625	3.375	3	C39579	C39600	C39621
9/32	.2812	.375	.688	3.375	3	C39580	C39601	C39622
5/16	.3125	.375	.750	3.500	3	C39581	C39602	C39623
11/32	.3438	.375	.750	3.500	3	C39582	C39603	C39624
3/8	.3750	.375	.750	3.500	3	C39583	C39604	C39625
13/32	.4062	.500	1.000	4.125	3	C39584	C39605	C39626
7/16	.4375	.500	1.000	4.125	3	C39585	C39606	C39627
1/2	.5000	.500	1.000	4.125	3	C39587	C39608	C39629
9/16	.5625	.625	1.375	5.000	3	C39588	C39609	C39630
5/8	.6250	.625	1.375	5.000	3	C39589	C39610	C39631
3/4	.7500	.750	1.625	5.625	3	C39591	C39612	C39633
7/8	.8750	.875	1.875	6.125	3	C39593	C39614	C39635
1	1.0000	1.000	1.875	6.375	3	C39595	C39616	C39637

High Speed Steel

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	★		★				★					
	TiCN	☆		☆				☆		★			
☆ = Best Performance ★ = Acceptable													

HSS

ANSI
SIZESSurface
Treatment


cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						HD-4C		
						Bright	TiN	TiCN
1/8	.1250	.375	.188	2.750	4	C74995	C75000	C75005
1/8	.1250	.375	.375	3.063	4	C41202	C33059	C33100
9/64	.1406	.375	.438	3.125	4	C33028	C33060	C33101
5/32	.1562	.375	.234	2.750	4	C74996	C75001	C75006
5/32	.1562	.375	.438	3.125	4	C33029	C33061	C33102
11/64	.1719	.375	.500	3.250	4	C33030	C33062	C33103
3/16	.1875	.375	.281	2.750	4	C74997	C75002	C75007
3/16	.1875	.375	.500	3.250	4	C41204	C33063	C33104
13/64	.2031	.375	.563	3.250	4	C33031	C33064	C33105
7/32	.2188	.375	.328	2.875	4	C74998	C75003	C75008
7/32	.2188	.375	.563	3.250	4	C33032	C33065	C33106
15/64	.2344	.375	.625	3.375	4	C33033	C33066	C33107
1/4	.2500	.375	.375	2.875	4	C74999	C75004	C75009
1/4	.2500	.375	.625	3.375	4	C41207	C33067	C33108
17/64	.2656	.375	.688	3.375	4	C33034	C33068	C33109
9/32	.2812	.375	.688	3.375	4	C33035	C33069	C33110
19/64	.2969	.375	.750	3.500	4	C33036	C33070	C33111
5/16	.3125	.375	.750	3.500	4	C41209	C33071	C33112
21/64	.3281	.375	.750	3.500	4	C33037	C33072	C33113
11/32	.3438	.375	.750	3.500	4	C33038	C33073	C33114
23/64	.3594	.375	.750	3.500	4	C33039	C33074	C33115
3/8	.3750	.375	.750	3.500	4	C41212	C33075	C33116
25/64	.3906	.500	1.000	4.500	4	C33040	C33076	C33117
13/32	.4062	.500	1.000	4.500	4	C33041	C33077	C33118
27/64	.4219	.500	1.000	4.500	4	C33042	C33078	C33119
7/16	.4375	.500	1.000	4.500	4	C33043	C33079	C33120
29/64	.4531	.500	1.000	4.500	4	C33044	C33080	C33121
15/32	.4688	.500	1.000	4.500	4	C33045	C33081	C33122
31/64	.4844	.500	1.000	4.500	4	C33046	C33082	C33123
1/2	.5000	.500	1.000	4.125	4	C41216	C33083	C33124
17/32	.5312	.625	1.375	5.000	4	C33047	C33084	C33125
9/16	.5625	.625	1.375	5.000	4	C33048	C33085	C33126
19/32	.5938	.625	1.375	5.000	4	C33049	C33086	C33127
5/8	.6250	.625	1.375	5.000	4	C41219	C33087	C33128
11/16	.6875	.750	1.625	5.625	4	C33051	C33089	C33130
3/4	.7500	.750	1.625	5.625	4	C41223	C33091	C33132
13/16	.8125	.875	1.875	6.125	4	C33054	C33093	C33134
7/8	.8750	.875	1.875	6.125	4	C41227	C33095	C33136
15/16	.9375	1.000	1.875	6.375	4	C33057	C33097	C75010
1	1.0000	1.000	1.875	6.375	4	C41231	C33099	C33140

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				
	Hardness												
TiN	★		★					★					
TiCN	☆		☆					☆		★			
☆ = Best Performance ★ = Acceptable													

Style: HG-2 - Single End
Finisher

ANSI
SIZES

HSS

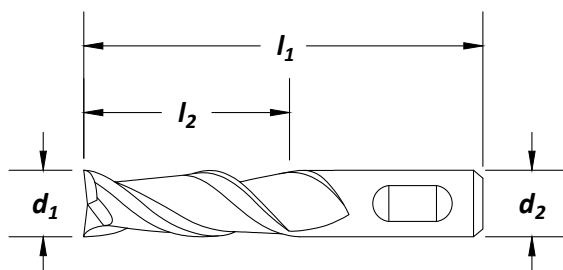
Surface
Treatment


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						HG-2 Bright	TiN	TiCN
1/8	.1250	.375	.375	2.313	2	C41602	C41550	C33803
5/32	.1562	.375	.438	2.375	2	C33730	C33754	C33804
11/64	.1719	.375	.438	2.375	2	C33731	C33755	C33805
3/16	.1875	.375	.281	2.375	2	C75183	C75217	C75251
3/16	.1875	.375	.438	2.375	2	C41604	C41551	C33806
3/16	.1875	.375	1.250	3.063	2	C39064	C39078	C39107
13/64	.2031	.375	.500	2.438	2	C33732	C33756	C33807
7/32	.2188	.375	.500	2.438	2	C33733	C33757	C33808
7/32	.2188	.375	1.250	3.063	2	C39065	C39079	C39108
15/64	.2344	.375	.500	2.438	2	C33734	C33758	C33809
1/4	.2500	.375	.500	2.438	2	C41607	C41552	C33810
1/4	.2500	.375	1.250	3.063	2	C39066	C39080	C39109
17/64	.2656	.375	.563	2.500	2	C33735	C33759	C33811
9/32	.2812	.375	.563	2.500	2	C33736	C33760	C33812
9/32	.2812	.375	1.375	3.125	2	C39067	C39081	C39110
19/64	.2969	.375	.563	2.500	2	C33737	C33761	C33813
5/16	.3125	.375	.563	2.500	2	C41609	C41553	C33814
5/16	.3125	.375	1.375	3.125	2	C39068	C39082	C39111
21/64	.3281	.375	.563	2.500	2	C33738	C33762	C33815
11/32	.3438	.375	.563	2.500	2	C33739	C33763	C33816
11/32	.3438	.375	1.500	3.250	2	C39069	C39083	C39112
23/64	.3594	.375	.563	2.500	2	C33740	C33764	C33817
3/8	.3750	.375	.563	2.500	2	C41612	C41554	C33818
3/8	.3750	.375	1.000	2.750	2	C75184	C75218	C75252
3/8	.3750	.375	1.500	3.250	2	C41714	C39084	C39113
25/64	.3906	.375	.813	2.688	2	C33741	C33765	C33819
13/32	.4062	.375	.813	2.688	2	C33742	C33766	C33820
13/32	.4062	.500	1.750	3.250	2	C39070	C39085	C39114
27/64	.4219	.375	.813	2.688	2	C33743	C33767	C33821
7/16	.4375	.375	.813	2.688	2	C41615	C33768	C33822
7/16	.4375	.500	1.750	3.250	2	C39071	C39086	C39115
29/64	.4531	.375	.813	2.688	2	C75185	C75219	C75253
29/64	.4531	.500	.813	3.250	2	C33744	C33769	C33823

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
	TiN	★		★				★		★			
	TiCN	★		★				★		★			

★ = Best Performance ★ = Acceptable

Finisher

Style: **HG-2** - Single End (continued)

cutting diameter d ₁	decimal equiv.	shank dia d ₂ (in)	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	order number		
						Bright	HG-2 TiN	TiCN
15/32	.4688	.375	.813	2.688	2	C75186	C75220	C75254
15/32	.4688	.500	.813	3.250	2	C33745	C33770	C33824
15/32	.4688	.500	2.000	4.000	2	C39072	C39087	C39116
31/64	.4844	.375	.813	2.688	2	C75187	C75221	C75255
31/64	.4844	.500	.813	3.250	2	C33746	C33771	C33825
1/2	.5000	.375	.813	2.688	2	C41617	C33772	C33826
1/2	.5000	.500	1.000	3.250	2	C41618	C41555	C33827
1/2	.5000	.500	1.500	3.500	2	C75188	C75222	C75256
1/2	.5000	.500	2.000	4.000	2	C41718	C39088	C39117
33/64	.5156	.500	1.000	3.250	2	C75189	C75223	C75257
33/64	.5156	.500	1.125	3.375	2	C33747	C33773	C33828
17/32	.5312	.500	1.125	3.375	2	C33748	C33774	C33829
17/32	.5312	.625	2.000	4.125	2	C39073	C39089	C39118
35/64	.5469	.500	1.125	3.375	2	C33749	C33775	C33830
9/16	.5625	.500	1.125	3.375	2	C41620	C33776	C33831
9/16	.5625	.625	2.000	4.125	2	C39074	C39090	C39119
37/64	.5781	.500	1.125	3.375	2	C33750	C33777	C33832
19/32	.5938	.500	1.125	3.375	2	C33751	C33778	C33833
39/64	.6094	.500	1.125	3.375	2	C33752	C33779	C33834
5/8	.6250	.500	.625	2.750	2	C75190	C75224	C75258
5/8	.6250	.500	1.125	3.375	2	C41622	C33780	C33835
5/8	.6250	.625	1.313	3.750	2	C41623	C41556	C33836
5/8	.6250	.625	1.625	3.750	2	C75191	C75225	C75259
5/8	.6250	.625	2.000	4.125	2	C41721	C39091	C39120
41/64	.6406	.625	1.313	3.750	2	C75192	C75226	C75260
21/32	.6563	.625	1.313	3.750	2	C75193	C75227	C75261
11/16	.6875	.500	1.313	3.625	2	C41625	C33781	C33837
11/16	.6875	.625	1.313	3.750	2	C41626	C33782	C33838
11/16	.6875	.750	2.250	4.500	2	C39075	C39092	C39121
23/32	.7188	.500	1.313	3.313	2	C75194	C75228	C75262
23/32	.7188	.750	1.313	3.875	2	C75195	C75229	C75263
47/64	.7344	.750	1.313	3.875	2	C75196	C75230	C75264
3/4	.7500	.500	1.313	3.250	2	C41628	C33783	C33839
3/4	.7500	.625	1.313	3.750	2	C41629	C33784	C33840
3/4	.7500	.750	.750	3.000	2	C75197	C75231	C75265
3/4	.7500	.750	1.313	3.625	2	C41630	C41557	C33841
3/4	.7500	.750	1.750	4.000	2	C75198	C75232	C75266
3/4	.7500	.750	2.250	4.500	2	C41724	C39093	C39122
25/32	.7813	.750	1.500	4.250	2	C75199	C75233	C75267
13/16	.8125	.625	1.500	4.000	2	C41632	C33785	C38900
13/16	.8125	.750	1.500	4.125	2	C75200	C75234	C75268
13/16	.8125	.875	2.500	4.750	2	C39076	C39094	C39123
27/32	.8438	.875	1.500	4.250	2	C75201	C75235	C75269
7/8	.8750	.625	1.500	4.125	2	C41635	C33786	C38901
7/8	.8750	.750	1.500	4.125	2	C41636	C33787	C38902
7/8	.8750	.875	1.500	4.000	2	C41637	C33788	C38903
7/8	.8750	.875	2.000	4.250	2	C75202	C75236	C75270
7/8	.8750	.875	2.500	4.750	2	C41728	C39095	C39124
29/32	.9063	.875	1.500	4.125	2	C75203	C75237	C75271
15/16	.9375	.625	1.500	4.000	2	C75204	C75238	C75272
15/16	.9375	.750	1.500	4.125	2	C75205	C75239	C75273
15/16	.9375	.875	1.500	4.125	2	C33753	C33789	C38904
15/16	.9375	1.000	3.000	5.500	2	C39077	C39096	C39125
31/32	.9688	1.000	1.625	4.500	2	C75206	C75240	C75274

continued on next page

Style: HG-2 - Single End (continued)
Finisher

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						Bright	HG-2 TiN	TiCN
1	1.0000	.500	1.500	3.500	2	C75207	C75241	C75275
1	1.0000	.625	1.500	4.125	2	C41641	C33790	C38905
1	1.0000	.750	1.500	4.000	2	C41642	C33791	C38906
1	1.0000	.875	1.500	4.125	2	C41643	C33792	C38907
1	1.0000	1.000	1.625	4.500	2	C41644	C41558	C38908
1	1.0000	1.000	2.250	4.750	2	C75208	C75242	C75276
1	1.0000	1.000	3.000	5.500	2	C41732	C39097	C39126
1-1/8	1.1250	.750	1.500	3.875	2	C75209	C75243	C75277
1-1/8	1.1250	.875	1.625	4.125	2	C41647	C33793	C38909
1-1/8	1.1250	1.000	1.625	4.500	2	C41648	C33794	C38910
1-1/8	1.1250	1.000	3.000	5.500	2	C41735	—	—
1-1/4	1.2500	.750	1.500	3.875	2	C75210	C75244	C75278
1-1/4	1.2500	.875	1.625	4.125	2	C41650	C33795	C38911
1-1/4	1.2500	1.000	1.625	4.500	2	C41651	C33796	C38912
1-1/4	1.2500	1.250	1.625	4.500	2	C41652	C33797	C38913
1-1/4	1.2500	1.000	3.000	5.500	2	C41737	C39099	C39128
1-1/4	1.2500	1.250	3.000	6.500	2	C41738	C39100	C39129
1-3/8	1.3750	.750	1.500	3.875	2	C75212	C75246	C75280
1-3/8	1.3750	1.000	1.625	4.500	2	C41655	C33798	C38914
1-3/8	1.3750	1.000	3.000	5.500	2	C41741	C39101	C39130
1-1/2	1.5000	1.000	1.625	4.500	2	C41659	C33799	C38915
1-1/2	1.5000	1.250	1.625	4.500	2	C41660	C33800	C38916
1-5/8	1.6250	1.250	1.625	4.500	2	C75213	C75247	C75281
1-5/8	1.6250	1.250	3.000	5.500	2	C41747	C39103	C39132
1-3/4	1.7500	.750	1.500	3.875	2	C75214	C75248	C75282
1-3/4	1.7500	1.250	1.625	4.500	2	C41662	C33801	C38917
1-7/8	1.8750	1.250	1.625	4.500	2	C75215	C75249	C75283
2	2.0000	.750	1.500	3.875	2	C75216	C75250	C75284
2	2.0000	1.250	1.625	4.500	2	C41665	C33802	C38918

High Speed Steel
Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32				>45
TiN	★		★					★		★			
TiCN	★		★					★		★			


★ = Best Performance ◆ = Acceptable

Style: **HG-2M** - Single End

HSS

ANSI
SIZESSurface
Treatment


Bright

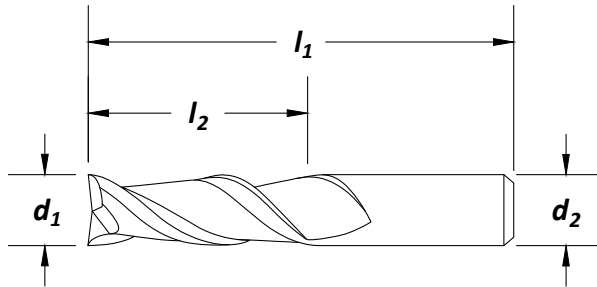

cutting diameter d_1	decimal equiv.	shank dia d_2 (mm)	length of cut l_2 (mm)	overall length l_1 (mm)	no. of flutes	order number HG-2M Bright
3	.1181	9.52	9.52	58.74	2	C75285
4	.1575	9.52	11.11	60.32	2	C75286
5	.1969	9.52	12.70	61.91	2	C75287
6	.2362	9.52	12.70	61.91	2	C75288
7	.2756	9.52	14.29	63.50	2	C75289
8	.3150	9.52	14.29	63.50	2	C75290
9	.3543	9.52	14.29	63.50	2	C75291
10	.3937	9.52	20.64	68.26	2	C75292
11	.4331	9.52	20.64	68.26	2	C75293
12	.4724	12.70	20.64	82.55	2	C75294
13	.5118	12.70	28.57	85.72	2	C75295
14	.5512	12.70	28.57	85.72	2	C75296
15	.5906	12.70	28.57	85.72	2	C75297
16	.6299	15.88	33.34	95.25	2	C75298
17	.6693	15.88	33.34	95.25	2	C75299
18	.7087	15.88	33.34	95.25	2	C75300
19	.7480	19.05	33.34	98.42	2	C75301
20	.7874	15.88	38.10	101.60	2	C75302
24	.9449	25.40	41.27	114.30	2	C75303
25	.9843	25.40	41.27	114.30	2	C75304

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				>45
Bright	☆			☆				☆		☆			
☆ = Best Performance ♦ = Acceptable													

Style: HG-2B - Single End
Finisher
**ANSI
SIZES**
HSS

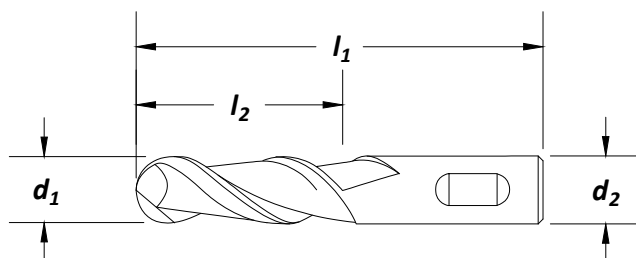**Surface
Treatment**
Bright
TiN
TiCN


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						Bright	HG-2B TiN	TiCN
1/8	.1250	.375	.375	2.313	2	C42109	C39010	C39027
3/16	.1875	.375	.500	2.375	2	C42111	C39011	C39028
1/4	.2500	.375	.625	2.438	2	C42114	C39012	C39029
5/16	.3125	.375	.750	2.500	2	C42116	C39013	C39030
3/8	.3750	.375	.750	2.500	2	C42119	C39014	C39031
7/16	.4375	.500	1.000	3.250	2	C42122	C39015	C39032
1/2	.5000	.500	1.000	3.250	2	C42124	C39016	C39033
9/16	.5625	.500	1.125	3.375	2	C42126	C39017	C39034
5/8	.6250	.500	1.125	3.375	2	C42128	C39018	C39035
5/8	.6250	.625	1.375	3.750	2	C42129	C39019	C39036
3/4	.7500	.500	1.313	3.625	2	C42132	C39020	C39037
3/4	.7500	.750	1.625	3.875	2	C42133	C39021	C39038
13/16	.8125	.750	2.000	4.250	2	C75305	C75311	C75317
7/8	.8750	.875	2.000	4.250	2	C42137	C39022	C39039
15/16	.9375	.750	2.250	4.500	2	C75306	C75312	C75318
1	1.0000	.750	2.250	4.500	2	C75307	C75313	C75319
1	1.0000	1.000	2.250	4.500	2	C42141	C39023	C39040
1-1/8	1.1250	1.000	2.250	4.750	2	C75308	C75314	C75320
1-1/8	1.1250	1.000	2.250	4.500	2	C42144	C39024	C39041
1-1/4	1.2500	.750	1.500	3.875	2	C75309	C75315	C75321
1-1/4	1.2500	1.250	2.500	4.500	2	C42146	C39025	C39042
1 3/8	1.3750	1.250	2.500	5.063	2	C75310	C75316	C75322
1-1/2	1.5000	1.250	2.500	4.500	2	C42152	C39026	C39043

High Speed Steel
Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
TiN	★		★					★					
TiCN	★		★					★	★				


★ = Best Performance ★ = Acceptable

Style: **HG-2K** - Single End**Note**

+.00 /-.0015 tolerances for correct key stock fit.

ANSI
SIZES

HSS

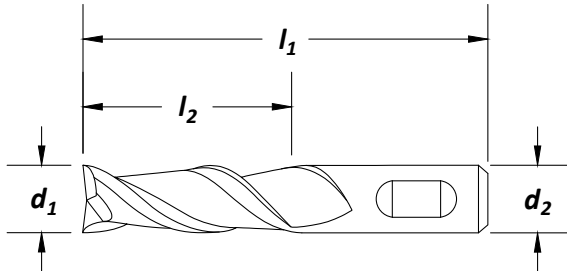Surface
Treatment

cutting diameter	decimal equiv.	shank dia d ₂ (in)	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	order number		
						Bright	HG-2K TiN	TiCN
1/8	.1250	.375	.375	2.313	2	C41671	C38932	C38957
3/16	.1875	.375	.438	2.375	2	C41673	C38933	C38958
7/32	.2188	.375	.500	2.438	2	C38919	C38934	C38959
1/4	.2500	.375	.500	2.438	2	C41676	C38935	C38960
9/32	.2812	.375	.563	2.500	2	C38920	C38936	C38961
5/16	.3125	.375	.563	2.500	2	C41678	C38937	C38962
11/32	.3438	.375	.563	2.500	2	C38921	C38938	C38963
3/8	.3750	.375	.563	2.500	2	C41681	C38939	C38964
13/32	.4062	.375	.813	2.688	2	C38922	C38940	C38965
7/16	.4375	.375	.813	2.688	2	C38923	C38941	C38966
15/32	.4688	.500	1.000	3.250	2	C38924	C38942	C38967
1/2	.5000	.500	1.000	3.250	2	C41685	C38943	C38968
17/32	.5312	.500	1.250	3.375	2	C38925	C38944	C38969
9/16	.5625	.500	1.250	3.375	2	C38926	C38945	C38970
5/8	.6250	.625	1.313	3.250	2	C41688	C38946	C38971
11/16	.6875	.625	1.313	3.250	2	C38927	C38947	C38972
3/4	.7500	.750	1.313	3.875	2	C41691	C38948	C38973
13/16	.8125	.625	1.500	4.000	2	C38928	C38949	C38974
7/8	.8750	.875	1.500	4.125	2	C41695	C38950	C38975
15/16	.9375	.875	1.500	4.125	2	C38929	C38951	C38976
1	1.0000	1.000	1.625	4.500	2	C41699	C38952	C38977
1-1/8	1.1250	1.000	1.625	4.500	2	C38930	C38953	C38978
1-1/4	1.2500	1.250	1.625	4.500	2	C41703	C38954	C38979
1-3/8	1.3750	1.000	1.625	4.500	2	C38931	C38955	C38980
1-1/2	1.5000	1.250	1.625	4.500	2	C41709	C38956	C38981



Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	★		★				★					
	TiCN	☆		☆				☆		★			
☆ = Best Performance ★ = Acceptable													

Style: HG-2KS - Single End
Keyway Cutter
Note

+.00 /-.0015 tolerances for correct key stock fit.

Keyway
Sizes

HSS

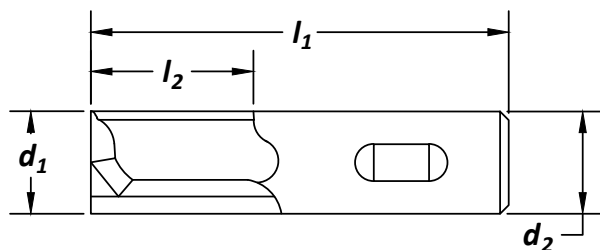
Surface
Treatment


cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	key slot width l_3 (in)	no. of flutes	order number HG-2KS Bright
1/8	.1230	.375	.375	2.313	.125	2	C75363
3/16	.1855	.375	.375	2.375	.188	2	C75364
1/4	.2480	.375	.500	2.438	.250	2	C75365
5/16	.3105	.375	.563	2.500	.313	2	C75366
3/8	.3730	.375	.563	2.500	.375	2	C75367
1/2	.4980	.500	1.000	3.250	.500	2	C75368
5/8	.6230	.625	1.313	3.750	.625	2	C75369
3/4	.7480	.750	1.313	3.875	.750	2	C75370
7/8	.8730	.8758	1.500	4.125	.875	2	C75371
1	.9980	1.000	1.625	4.500	1.000	2	C75372


High Speed Steel

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright	☆		☆					☆	☆	◆			
☆ = Best Performance ◆ = Acceptable													

Style: **HGN-2 - Single End**ANSI
SIZES

HSS

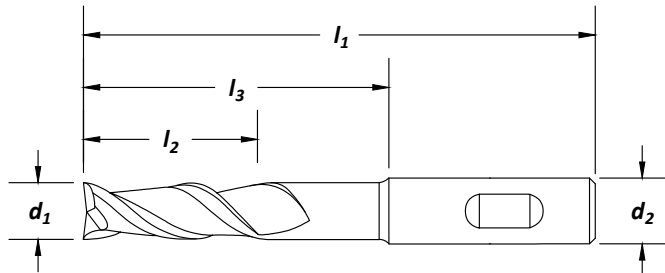Surface
Treatment

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	reach l_3 (in)	no. of flutes	order number HGN-2 Bright
1/8	.1250	.375	.375	2.313	.813	2	C38982
3/16	.1875	.375	.500	2.688	1.125	2	C38983
1/4	.2500	.375	.625	3.063	1.500	2	C41772
5/16	.3125	.375	.750	3.313	1.750	2	C41774
3/8	.3750	.375	.750	3.313	1.750	2	C41777
7/16	.4375	.500	1.000	3.250	1.875	2	C38984
1/2	.5000	.500	1.000	4.000	2.250	2	C41781
5/8	.6250	.625	1.375	4.625	2.750	2	C41784
3/4	.7500	.750	1.625	5.250	3.375	2	C41787
7/8	.8750	.875	2.500	5.750	4.000	2	C38985
1	1.0000	1.000	2.500	7.250	5.000	2	C41795
1-1/4	1.2500	1.250	2.000	7.250	5.000	2	C41799

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	☆			☆				☆		◆			
☆ = Best Performance ◆ = Acceptable													

Style: HGN-2B - Single End

Finisher
Extended Neck


ANSI
SIZES

HSS



Surface
Treatment

Bright

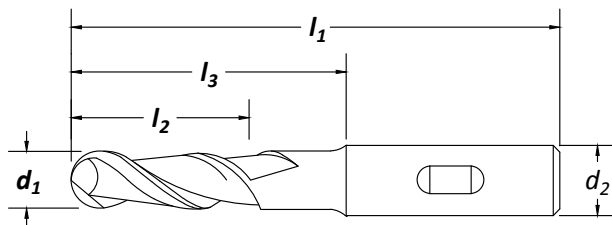

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	reach l_3 (in)	no. of flutes	order number HGN-2B Bright
1/8	.1250	.375	.375	2.375	.813	2	C42158
3/16	.1875	.375	.500	2.688	1.125	2	C42160
1/4	.2500	.375	.625	3.063	1.500	2	C42163
5/16	.3125	.375	.750	3.313	1.750	2	C42165
3/8	.3750	.375	.750	3.313	1.750	2	C42168
7/16	.4375	.500	1.000	3.250	1.875	2	C42171
1/2	.5000	.500	1.000	4.000	2.250	2	C42173
5/8	.6250	.625	1.375	4.625	2.750	2	C42176
3/4	.7500	.750	1.625	5.375	3.375	2	C42179
7/8	.8750	.875	2.500	5.750	4.000	2	C39174
1	1.0000	1.000	2.500	7.250	5.000	2	C42181

High Speed Steel

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	☆		☆					☆		◆			

☆ = Best Performance ◆ = Acceptable

ANSI
SIZES

HSS

2 Flute CC

Helix 37°


Square End

Surface
Treatment

Bright

TiN

TiCN

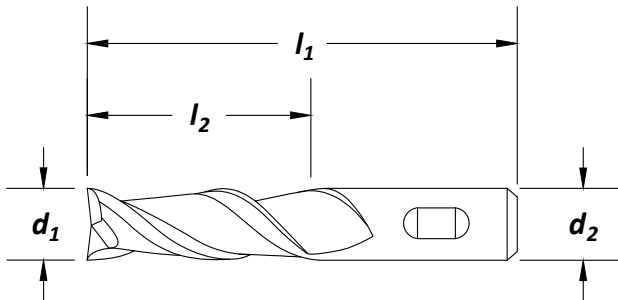


cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						HGA-2		
						Bright	TiN	TiCN
1/4	.2500	.375	.625	2.437	2	C41843	C33476	C33488
1/4	.2500	.375	1.250	3.063	2	C41888	C33500	C33511
1/4	.2500	.375	1.750	3.563	2	C41930	C33524	C33535
5/16	.3125	.375	.750	2.500	2	C41845	—	C33489
5/16	.3125	.375	1.375	3.125	2	C41890	—	C33512
5/16	.3125	.375	2.000	3.250	2	C41932	C33525	C33536
3/8	.3750	.375	.750	2.500	2	C41848	C33478	C33490
3/8	.3750	.375	1.500	3.250	2	C41893	C33502	C33513
3/8	.3750	.375	2.500	4.250	2	C41935	C33526	C33537
7/16	.4375	.375	1.000	2.688	2	C41851	—	C33491
7/16	.4375	.500	1.750	3.250	2	C41896	—	C33514
7/16	.4375	.375	2.750	4.500	2	C33522	—	C33538
1/2	.5000	.500	1.250	3.250	2	C41853	C33480	C33492
1/2	.5000	.500	2.000	4.000	2	C41898	C33504	C33515
1/2	.5000	.500	3.000	5.000	2	C41939	C33528	C33539
5/8	.6250	.875	1.625	3.750	2	C41856	—	C33493
5/8	.6250	.875	2.500	4.625	2	C41901	—	C33516
5/8	.6250	.875	4.000	6.125	2	C41942	—	C33540
3/4	.7500	.750	1.625	3.875	2	C41859	—	C33494
3/4	.7500	.750	3.000	5.250	2	C41904	C33506	C33517
3/4	.7500	.750	4.000	6.250	2	C41945	C33530	C33541
7/8	.8750	.875	1.875	4.125	2	C41863	—	C33495
7/8	.8750	.875	3.500	5.750	2	C32066	—	C33518
7/8	.8750	.875	5.000	7.250	2	C33523	—	C33542
1	1.0000	1.000	2.000	4.500	2	C41867	—	C33496
1	1.0000	1.000	4.000	6.500	2	C41911	—	C33519
1	1.0000	1.000	6.000	8.500	2	C41952	—	C33543

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	+											
	TiCN	☆								☆			

☆ = Best Performance + = Acceptable

ANSI
SIZES

HSS

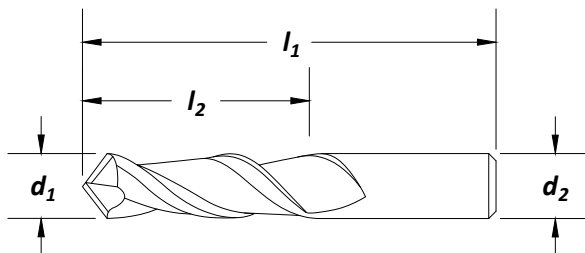
Surface
Treatment


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						HPDM-2		
						Bright	TiN	TiCN
1/4	.2500	.375	.500	2.313	2	C32430	C40506	C40519
5/16	.3125	.375	.563	2.313	2	C32431	C40507	C40520
3/8	.3750	.375	.563	2.313	2	C32432	C40508	C40521
7/16	.4375	.375	.813	2.500	2	C32433	C40509	C40522
1/2	.5000	.500	1.000	2.000	2	C32434	C40510	C40523
9/16	.5625	.500	1.125	3.125	2	C32435	C40511	C40524
5/8	.6250	.625	1.313	3.438	2	C32436	C40512	C40525
3/4	.7500	.750	1.313	3.563	2	C32438	C40514	C40527
7/8	.8750	.750	1.500	3.250	2	C32440	C40516	C40529
1	1.0000	.750	1.500	3.250	2	C40505	C40518	C40531


TECH TIP
Using Drill Mills

- 90° point allows for rapid plunge cuts.
- Also good for slotting applications.
- 2 flutes deliver enhanced chip ejection.


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright												
	TiN												
	TiCN												

☆ = Best Performance

◆ = Acceptable

ANSI
SIZES

HSS

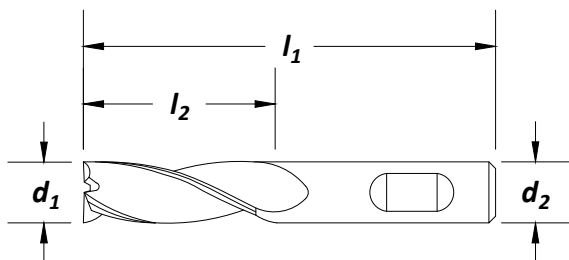Surface
Treatment

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number HG-3		
						Bright	TiN	TiCN
1/8	.1250	.375	.375	2.313	3	C39638	C39669	C39700
5/32	.1562	.375	.500	2.375	3	C39639	C39670	C39701
3/16	.1875	.375	.500	2.375	3	C39640	C39671	C39702
3/16	.1875	.375	1.250	3.063	3	C39731	C39753	C39775
7/32	.2188	.375	.625	2.438	3	C39641	C39672	C39703
7/32	.2188	.375	1.250	3.063	3	C39732	C39754	C39776
1/4	.2500	.375	.625	2.438	3	C39642	C39673	C39704
1/4	.2500	.375	1.250	3.063	3	C39733	C39755	C39777
9/32	.2812	.375	.750	2.500	3	C39643	C39674	C39705
9/32	.2812	.375	1.375	3.125	3	C39734	C39756	C39778
5/16	.3125	.375	.750	2.500	3	C39644	C39675	C39706
5/16	.3125	.375	1.375	3.125	3	C39735	C39757	C39779
11/32	.3438	.375	.750	2.500	3	C39645	C39676	C39707
11/32	.3438	.375	1.500	3.250	3	C39736	C39758	C39780
3/8	.3750	.375	.750	2.500	3	C39646	C39677	C39708
3/8	.3750	.375	1.500	3.250	3	C39737	C39759	C39781
13/32	.4062	.375	1.000	2.688	3	C39647	C39678	C39709
13/32	.4062	.500	1.750	3.250	3	C39738	C39760	C39782
7/16	.4375	.375	1.000	2.688	3	C39648	C39679	C39710
7/16	.4375	.500	1.750	3.250	3	C39739	C39761	C39783
15/32	.4688	.500	1.250	3.250	3	C39649	C39680	C39711
15/32	.4688	.500	2.000	4.000	3	C39740	C39762	C39784
1/2	.5000	.375	1.000	2.688	3	C39650	C39681	C39712
1/2	.5000	.500	1.250	3.250	3	C39651	C39682	C39713
1/2	.5000	.500	2.000	4.000	3	C39741	C39763	C39785
9/16	.5625	.500	1.375	3.375	3	C39652	C39683	C39714
5/8	.6250	.625	1.625	3.750	3	C39653	C39684	C39715
5/8	.6250	.625	2.500	4.625	3	C39742	C39764	C39786
11/16	.6875	.625	1.625	3.750	3	C39654	C39685	C39716
3/4	.7500	.750	1.625	3.875	3	C39655	C39686	C39717
3/4	.7500	.750	3.000	5.250	3	C39743	C39765	C39787
13/16	.8125	.625	1.875	4.000	3	C39656	C39687	C39718
7/8	.8750	.875	1.875	4.125	3	C39657	C39688	C39719
7/8	.8750	.875	3.500	5.750	3	C39744	C39766	C39788
15/16	.9375	.875	1.875	4.125	3	C39658	C39689	C39720
1	1.0000	.750	1.875	4.125	3	C39659	C39690	C39721
1	1.0000	1.000	2.000	4.500	3	C39660	C39691	C39722
1	1.0000	1.000	4.000	6.500	3	C39745	C39767	C39789


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	★		★				★					
	TiCN	☆		☆				☆		★			

☆ = Best Performance ★ = Acceptable

Style: HG-4C - Single End
General Purpose
 Multi Flute

 ANSI
 SIZES

HSS

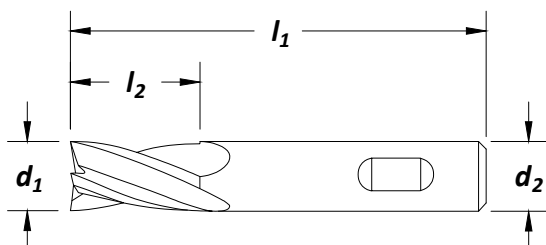
 Surface
 Treatment

Feature:

Heavy cross-section for high rigidity.

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						Bright	TiN	TiCN
1/8	.1250	.375	.375	2.313	4	C41243	C41520	C33240
9/64	.1406	.375	.500	2.313	4	C33141	C33188	C33241
5/32	.1562	.375	.500	2.375	4	C33142	C33189	C33242
11/64	.1719	.375	.500	2.375	4	C33143	C33190	C33243
3/16	.1875	.375	.500	2.375	4	C41245	C41521	C33244
3/16	.1875	.375	1.250	3.063	4	C33371	C33384	C33406
3/16	.1875	.375	1.750	3.563	4	C33428	C33438	C33457
13/64	.2031	.375	.625	2.438	4	C33144	C33191	C33245
7/32	.2188	.375	.625	2.438	4	C33145	C33192	C33246
7/32	.2188	.375	1.250	3.063	4	C33372	C33385	C33407
7/32	.2188	.375	1.750	3.563	4	C33429	C33439	C33458
15/64	.2344	.375	.625	2.438	4	C33146	C33193	C33247
1/4	.2500	.375	.625	2.438	4	C41248	C41522	C33248
1/4	.2500	.375	1.250	3.063	4	C41326	C33386	C33408
1/4	.2500	.375	1.750	3.563	4	C41381	C33440	C33459
17/64	.2656	.375	.750	2.500	4	C33147	C33194	C33249
9/32	.2812	.375	.750	2.500	4	C33148	C33195	C33250
9/32	.2812	.375	1.375	3.125	4	C33373	C33387	C33409
9/32	.2812	.375	2.000	3.250	4	C33430	C33441	C33460
19/64	.2969	.375	.750	2.500	4	C33149	C33196	C33251
5/16	.3125	.375	.750	2.500	4	C41250	C41523	C33252
5/16	.3125	.375	1.375	3.125	4	C41328	C33388	C33410
5/16	.3125	.375	2.000	3.750	4	C41383	C33442	C33461
21/64	.3281	.375	.750	2.500	4	C33150	C33197	C33253
11/32	.3438	.375	.750	2.500	4	C33151	C33198	C33254
11/32	.3438	.375	1.500	3.250	4	C33374	C33389	C33411
11/32	.3438	.375	2.500	4.250	4	C33431	C33443	C33462
23/64	.3594	.375	.750	2.500	4	C33152	C33199	C33255
3/8	.3750	.375	.750	2.500	4	C41253	C41524	C33256
3/8	.3750	.375	1.500	3.250	4	C41331	C33390	C33412
3/8	.3750	.375	2.500	4.250	4	C41386	C33444	C33463
25/64	.3906	.375	1.000	2.688	4	C33153	C33200	C33257
13/32	.4062	.375	1.000	2.688	4	C33154	C33201	C33258
13/32	.4062	.375	2.750	4.500	4	C33432	C33445	C33464
13/32	.4062	.500	1.750	3.750	4	C33375	C33391	C33413

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	★		★				★					
	TiCN	★		★				★		★			

★ = Best Performance ◆ = Acceptable

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						HG-4C		
						Bright	TiN	TiCN
27/64	.4219	.375	1.000	2.688	4	C33155	C33202	C33259
7/16	.4375	.375	1.000	2.688	4	C41254	C33203	C33260
7/16	.4375	.375	2.750	4.500	4	C33433	C33446	C33465
7/16	.4375	.500	1.750	3.750	4	C33376	C33392	C33414
29/64	.4531	.500	1.250	3.250	4	C33157	C33204	C33261
15/32	.4688	.500	1.250	3.250	4	C33158	C33205	C33262
15/32	.4688	.500	2.000	4.000	4	C33377	C33393	C33415
15/32	.4688	.500	3.000	5.000	4	C33434	C33447	C33466
31/64	.4844	.500	1.250	3.250	4	C33159	C33206	C33263
1/2	.5000	.375	1.000	2.688	4	C33160	C33207	C33264
1/2	.5000	.500	1.250	3.250	4	C41257	C41525	C33265
1/2	.5000	.500	2.000	4.000	4	C41335	C33394	C33416
1/2	.5000	.500	2.000	5.000	4	C41390	C33448	C33467
17/32	.5312	.500	1.375	3.375	4	C33161	C33208	C33266
9/16	.5625	.500	1.375	3.375	4	C33162	C33209	C33267
19/32	.5938	.500	1.375	3.375	4	C33163	C33210	C33268
5/8	.6250	.500	1.375	3.375	4	C33164	C33211	C33269
5/8	.6250	.625	1.625	3.750	4	C41260	C41526	C33270
5/8	.6250	.625	2.500	4.625	4	C41338	C33395	C33417
5/8	.6250	.625	4.000	6.125	4	C41393	C33449	C33468
21/32	.6562	.625	1.625	3.750	4	C33165	C33212	C33271
11/16	.6875	.500	1.625	3.375	4	C33166	C33213	C33272
11/16	.6875	.625	1.625	3.750	4	C41262	C33214	C33273
23/32	.7188	.750	1.625	3.875	4	C33167	C33215	C33274
3/4	.7500	.500	.875	2.875	4	C75017	C75042	C75067
3/4	.7500	.500	1.625	3.625	4	C33168	C33216	C33275
3/4	.7500	.625	1.625	3.750	4	C33169	C33217	C33276
3/4	.7500	.750	1.625	3.875	4	C41264	C41527	C33277
3/4	.7500	.750	3.000	5.250	4	C41341	C33396	C33418
3/4	.7500	.750	4.000	6.250	4	C41396	C33450	C33469
25/32	.7812	.750	1.875	4.125	4	C33170	C33218	C33278
13/16	.8125	.625	1.875	4.000	4	C33171	C33219	C33279
13/16	.8125	.625	1.875	4.000	6	C75018	C75043	C75068
13/16	.8125	.750	1.875	4.125	4	C75019	C75044	C75069
7/8	.8750	.625	1.875	4.000	4	C33173	C33221	C33281
7/8	.8750	.625	1.875	4.000	6	C75020	C75045	C75070
7/8	.8750	.750	1.000	3.250	4	C75021	C75046	C75071
7/8	.8750	.750	1.875	4.125	4	C33174	C33222	C33282
7/8	.8750	.875	1.875	4.125	4	C41268	C33223	C33283
7/8	.8750	.875	3.500	5.750	4	C41345	C33397	C33419
7/8	.8750	.875	5.000	7.250	4	C41400	C33451	C33470
15/16	.9375	.750	1.875	4.125	4	C75022	C75047	C75072
15/16	.9375	.875	1.875	4.125	4	C33176	C33225	C33285
31/32	.9688	1.000	2.000	4.500	4	C33177	C33226	C33286
1	1.0000	.625	1.875	4.000	4	C33178	C33227	C33287
1	1.0000	.625	1.875	4.000	6	C75023	C75048	C75073
1	1.0000	.750	1.000	3.125	6	C75024	C75049	C75074
1	1.0000	.750	1.875	4.125	4	C33179	C33228	C33288
1	1.0000	.875	1.875	4.125	4	C33180	C33229	C33289
1	1.0000	1.000	2.000	4.500	4	C41272	C41528	C33290
1	1.0000	1.000	3.000	5.500	4	C75025	C75050	C75075
1	1.0000	1.000	4.000	6.500	4	C41349	C33398	C33420
1	1.0000	1.000	6.000	8.500	4	C41404	C33452	C33471
1-1/8	1.1250	.750	1.375	3.625	6	C75026	C75051	C75076
1-1/8	1.1250	.875	2.000	4.500	4	C33181	C33230	C33291

continued on next page

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						Bright	HG-4C TiN	TiCN
1-1/8	1.1250	1.000	2.000	4.500	4	C41275	C33231	C33292
1-1/8	1.1250	1.000	2.000	4.500	6	C75027	C75052	C75077
1-1/8	1.1250	1.000	4.000	6.500	4	C33378	C33399	C33421
1-1/8	1.1250	1.000	4.000	6.500	6	C75028	C75053	C75078
1-1/4	1.2500	.750	1.375	3.625	6	C75029	C75054	C75079
1-1/4	1.2500	.875	2.000	4.500	4	C33182	C33232	C33293
1 1/4	1.2500	.875	2.000	4.250	6	C75030	C75055	C75080
1-1/4	1.2500	1.000	2.000	4.500	4	C33183	C33233	C33294
1-1/4	1.2500	1.000	2.000	4.500	6	C75031	C75056	C75081
1-1/4	1.2500	1.000	4.000	6.500	4	C33379	C33400	C33422
1-1/4	1.2500	1.250	2.000	4.500	4	C41277	C33234	C33295
1-1/4	1.2500	1.250	2.000	4.500	6	C75032	C75057	C75082
1-1/4	1.1250	1.250	4.000	6.500	4	C41353	C33401	C33423
1-1/4	1.1250	1.250	4.000	6.500	6	C75033	C75058	C75083
1-1/4	1.2500	1.250	6.000	8.500	4	C41408	C33453	C33472
1-1/4	1.2500	1.250	6.000	8.500	6	C33435	C33454	C33473
1-3/8	1.3750	.750	1.375	3.625	6	C75034	C75059	C75084
1-3/8	1.3750	1.000	2.000	4.500	4	C33184	C33235	C33296
1-3/8	1.3750	1.000	2.000	4.500	6	C75035	C75060	C75085
1-1/2	1.5000	.750	1.375	3.625	6	C75036	C75061	C75086
1-1/2	1.5000	1.000	2.000	4.500	6	C33185	C33236	C33297
1-1/2	1.5000	1.000	4.000	6.500	4	C33380	C33402	C33424
1-1/2	1.5000	1.000	4.000	6.500	6	C75037	C75062	—
1-1/2	1.5000	1.250	2.000	4.500	4	C41283	C33237	C33298
1-1/2	1.5000	1.250	2.000	4.500	6	C75038	C75063	C75087
1-1/2	1.5000	1.250	4.000	6.500	4	C33381	C33403	C33425
1-1/2	1.5000	1.250	4.000	6.500	6	C75039	C75064	C75088
1-1/2	1.5000	1.250	8.000	10.500	4	C33436	C33455	C33474
1-1/2	1.5000	1.250	8.000	10.500	6	C33437	C33456	C33475
1-3/4	1.7500	.750	1.375	3.625	6	C75040	C75065	C75089
1-3/4	1.7500	1.250	2.000	4.500	6	C33186	C33238	C33299
1-3/4	1.7500	1.250	4.000	6.500	4	C33382	C33404	C33426
1-3/4	1.7500	1.250	4.000	6.500	6	C75041	C75066	C75090
2	2.0000	1.250	2.000	4.500	8	C33187	C33239	C33300


TECH TIP
Benefits of Multi Flute End Mills

- Generally, multi flute end mills give smoother finishes than 2 flute end mills.
- Increased number of flutes mean more cutting edges, providing more cutting action.


Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32				>45
TiN	★		★					★					
TiCN	☆		☆					☆		★			

☆ = Best Performance

★ = Acceptable

Style: **HG-4MC** - Single EndANSI
SIZES


HSS

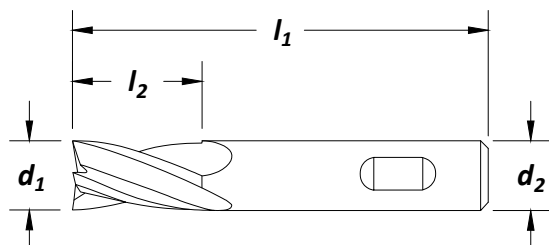Surface
Treatment

cutting diameter d_1	decimal equiv.	shank dia d_2 (mm)	length of cut l_2 (mm)	overall length l_1 (mm)	no. of flutes	order number HG-4MC Bright
3	.1181	9.52	9.52	58.74	4	C75091
4	.1575	9.52	12.70	60.32	4	C75092
5	.1969	9.52	15.88	61.91	4	C75093
6	.2362	9.52	15.88	61.91	4	C75094
7	.2756	9.52	19.05	63.50	4	C75095
8	.3150	9.52	19.05	63.50	4	C75096
9	.3543	9.52	19.05	63.50	4	C75097
10	.3937	9.52	25.40	68.26	4	C75098
11	.4331	9.52	25.40	68.26	4	C75099
12	.4724	12.70	31.75	82.55	4	C75100
13	.5118	12.70	34.92	85.72	4	C75101
14	.5512	12.70	34.92	85.72	4	C75102
15	.5906	12.70	34.92	85.72	4	C75103
16	.6299	15.88	41.27	95.25	4	C75104
17	.6693	15.88	41.27	95.25	4	C75105
18	.7087	15.88	41.27	95.25	4	C75106
19	.7480	19.05	41.27	98.42	4	C75107
20	.7874	15.88	47.63	101.60	4	C75108
21	.8268	15.88	47.63	101.60	4	C75109
22	.8661	22.23	47.63	104.78	4	C75110
23	.9055	22.23	47.63	104.78	4	C75111
24	.9449	25.40	50.80	114.30	4	C75112
25	.9843	25.40	50.80	114.30	4	C75113

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				
Bright	☆		☆					☆	◆				
☆ = Best Performance ◆ = Acceptable													

Style: HG-4B - Single End
General Purpose

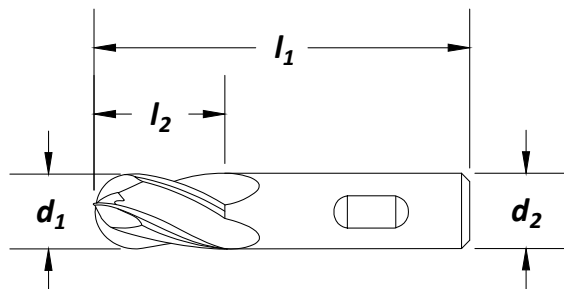Surface Treatment

Feature:

Heavy cross-section for high rigidity.


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number HG-4B		
						Bright	TiN	TiCN
1/4	.2500	.375	.625	2.438	4	C33301	C33303	C33313
1/4	.2500	.375	1.250	3.063	4	C33323	C33326	C33335
1/4	.2500	.375	1.750	3.563	4	C33344	C33353	C33362
5/16	.3125	.375	.750	2.500	4	C33302	C33304	C33314
5/16	.3125	.375	1.375	3.125	4	C33324	C33327	C33336
5/16	.3125	.375	2.000	3.250	4	C33345	C33354	C33363
3/8	.3750	.375	.750	2.500	4	C41289	C33305	C33315
3/8	.3750	.375	1.500	3.250	4	C33325	C33328	C33337
3/8	.3750	.375	2.500	4.250	4	C33346	C33355	C33364
1/2	.5000	.500	1.000	3.000	4	C75114	C75115	C75116
1/2	.5000	.500	1.250	3.250	4	C41293	C33306	C33316
1/2	.5000	.500	2.000	4.000	4	C41358	C33329	C33338
1/2	.5000	.500	3.000	5.000	4	C33347	C33356	C33365
5/8	.6250	.625	1.625	3.750	4	C41297	C33307	C33317
5/8	.6250	.625	2.500	4.625	4	C41361	C33330	C33339
5/8	.6250	.625	4.000	6.125	4	C33348	C33357	C33366
3/4	.7500	.750	1.625	3.875	4	C41300	C33308	C33318
3/4	.7500	.750	3.000	5.250	4	C41364	C33331	C33340
3/4	.7500	.750	4.000	6.250	4	C33349	C33358	C33367
7/8	.8750	.875	1.875	4.125	4	C41304	C33309	C33319
1	1.0000	1.000	2.000	4.500	4	C41308	C33310	C33320
1	1.0000	1.000	4.000	6.500	4	C41371	C33332	C33341
1	1.0000	1.000	6.000	8.500	4	C33350	C33359	C33368
1-1/4	1.2500	1.250	2.000	4.500	4	C41312	C33311	C33321
1-1/4	1.2500	1.250	4.000	6.500	4	C41375	C33333	C33342
1-1/2	1.5000	1.250	4.000	6.500	4	C41377	C33334	C33343

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
TiN	★		★					★					
TiCN	★		★					★	★				

★ = Best Performance ★ = Acceptable

Styles: **HG-4LL**ANSI
SIZES

HSS

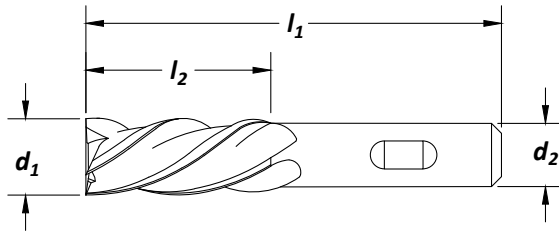Surface
Treatment**Feature:**

Heavy cross-section for high rigidity.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						HG-4LL		
						Bright	TiN	TiCN
3/16	.1875	.375	.500	2.375	4	C42294	C33610	C33618
1/4	.2500	.375	.625	2.438	4	C42297	C33611	C33619
5/16	.3125	.375	.750	2.500	4	C42299	C33612	C33620
3/8	.3750	.375	.750	2.500	4	C42302	C33613	C33621
7/16	.4375	.375	1.000	2.688	4	C33609	C33614	C33622
1/2	.5000	.500	1.250	3.250	4	C42306	C33615	C33623
5/8	.6250	.625	1.625	3.250	4	C42309	C33616	C33624
3/4	.7500	.750	1.625	3.875	4	C42312	C33617	C33625

**Using Style HG-4LL End Mills**

- 32° left-hand helix for reverse spindle operation.
- 4 flute design delivers smoother finish.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright	☆		☆					☆		☆			


☆ = Best Performance ♦ = Acceptable

Styles: CRE
Corner Radius

ANSI
SIZES

HSS


Surface
Treatment

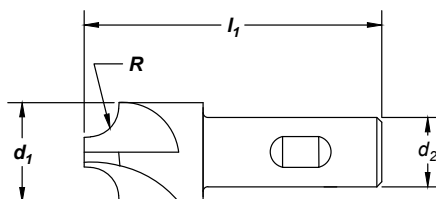
Bright


cutting diameter	decimal equiv.	shank dia d ₂ (in)	overall length L ₁ (in)	no. of flutes	radius R (in)	order number CRE Bright
d ₁		d ₂ (in)	L ₁ (in)			
7/16	.4375	.375	2.500	4	.0625	C75373
1/2	.500	.375	2.500	4	.0938	C75374
5/8	.625	.500	3.000	4	.1250	C75375
3/4	.750	.500	3.000	4	.1562	C75376
7/8	.875	.500	2.938	4	.1875	C75377
7/8	.875	.750	3.125	4	.1875	C75378
1	1.000	.500	3.000	4	.2500	C75379
1	1.000	.750	3.250	4	.2500	C75380
1-1/8	1.125	.500	3.250	4	.3125	C75381
1-1/8	1.125	.875	3.500	4	.3125	C75382
1-1/4	1.250	.500	3.500	4	.3750	C75383
1-1/4	1.250	.875	3.750	4	.3750	C75384
1-3/8	1.375	1.000	4.000	4	.4375	C75385
1-1/2	1.500	1.000	4.125	4	.5000	C75386

High Speed Steel

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	☆		☆					☆	◆				


☆ = Best Performance ◆ = Acceptable

Miniature

Style: **HMDC-2 - Double End****Note**

Operating parameters
begin on page 310.

**M42
Cobalt**
**ANSI
SIZES**

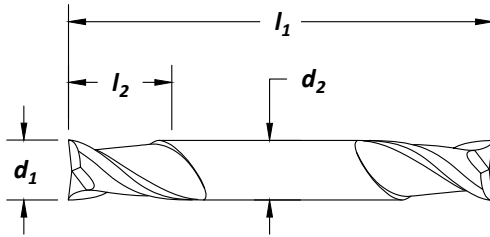**Surface
Treatment**
**Feature:**

High red hardness for high heat conditions.

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number HMDC-2	
						Bright	TiCN
1/32	.0312	.188	.047	2.000	2	C40936	C40958
1/32	.0312	.188	.094	2.250	2	C40903	C40925
3/64	.0469	.188	.063	2.000	2	C40937	C40959
3/64	.0469	.188	.141	2.250	2	C40904	C40926
1/16	.0625	.188	.094	2.000	2	C40938	C40960
1/16	.0625	.188	.188	2.250	2	C40905	C40927
5/64	.0781	.188	.125	2.000	2	C40939	C40961
5/64	.0781	.188	.234	2.250	2	C40906	C40928
3/32	.0938	.188	.141	2.000	2	C40940	C40962
3/32	.0938	.188	.281	2.250	2	C40907	C40929
7/64	.1094	.188	.156	2.000	2	C40941	C40963
7/64	.1094	.188	.328	2.250	2	C40908	C40930
1/8	.1250	.188	.188	2.000	2	C40942	C40964
1/8	.1250	.188	.375	2.250	2	C40909	C40931
9/64	.1406	.188	.219	2.000	2	C40943	C40965
9/64	.1406	.188	.406	2.250	2	C40910	C40932
5/32	.1562	.188	.234	2.000	2	C40944	C40966
5/32	.1562	.188	.438	2.250	2	C40911	C40933
11/64	.1719	.188	.250	2.000	2	C40945	C40967
11/64	.1719	.188	.500	2.250	2	C40912	C40934
3/16	.1875	.188	.281	2.000	2	C40946	C40968
3/16	.1875	.188	.500	2.250	2	C40913	C40935

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright												
	TiCN												
☆ = Best Performance ♦ = Acceptable													

Style: HMDC-4 - Double End
Miniature

Note
Operating parameters
begin on page 310.

M42
Cobalt


ANSI
SIZES



Surface
Treatment

Bright

TiCN

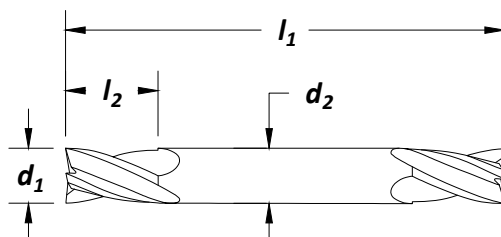

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number HMDC-4	
						Bright	TiCN
1/16	.0625	.188	.094	2.000	4	C40984	C40994
1/16	.0625	.188	.188	2.250	4	C40969	C40979
3/32	.0938	.188	.141	2.000	4	C40985	C40995
3/32	.0938	.188	.281	2.250	4	C40970	C40980
1/8	.1250	.188	.188	2.000	4	C40986	C40996
1/8	.1250	.188	.375	2.250	4	C40971	C40981
5/32	.1562	.188	.234	2.000	4	C40987	C40997
3/16	.1875	.188	.281	2.000	4	C40988	C40998
3/16	.1875	.188	.500	2.250	4	C40973	C40983



Miniature End Mill Features

- All miniature end mills feature 3/16" shanks.
- Only one holder size needed for all cutting diameters.
- Double end mills are available in multiple lengths.
- Double end mills have two cutting ends to reduce tool costs.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright													
TiCN													


☆ = Best Performance ◆ = Acceptable

Finisher

Style: **HDC-2 - Double End****Note**

Operating parameters
begin on page 310.

**M42
Cobalt**
**ANSI
SIZES**

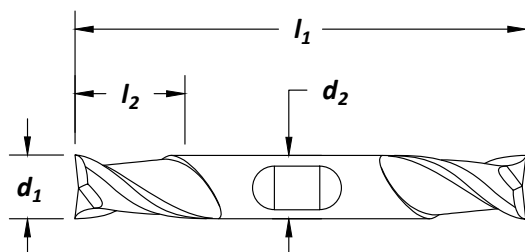**Surface
Treatment**
**Feature:**

High red hardness for high heat conditions.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						Bright	HDC-2 TiN	TiCN
1/8	.1250	.375	.375	3.063	2	C52151	C32847	C32880
9/64	.1406	.375	.438	3.125	2	C32833	—	—
5/32	.1562	.375	.438	3.125	2	C52152	—	C32882
11/64	.1719	.375	.438	3.250	2	C32834	—	—
3/16	.1875	.375	.438	3.250	2	C52153	C32851	C32884
13/64	.2031	.375	.500	3.250	2	C32835	—	C32885
7/32	.2188	.375	.500	3.250	2	C52154	—	C32886
15/64	.2344	.375	.500	3.375	2	C32836	—	C32887
1/4	.2500	.375	.500	3.375	2	C52155	C32855	C32888
17/64	.2656	.375	.563	3.375	2	C32837	—	C32889
9/32	.2812	.375	.563	3.375	2	C52156	—	C32890
19/64	.2969	.375	.563	3.500	2	C32838	—	—
5/16	.3125	.375	.563	3.500	2	C52157	C32859	C32892
21/64	.3281	.375	.563	3.500	2	C32839	—	—
11/32	.3438	.375	.563	3.500	2	C52158	—	C32894
23/64	.3594	.375	.563	3.500	2	C32840	—	—
3/8	.3750	.375	.563	3.500	2	C52159	C32863	C32896
25/64	.3906	.500	.813	4.125	2	C32841	—	—
13/32	.4062	.500	.813	4.125	2	C52160	—	C32898
27/64	.4219	.500	.813	4.125	2	C32842	—	—
7/16	.4375	.500	.813	4.125	2	C52161	C32867	C32900
29/64	.4531	.500	.813	4.125	2	C32843	—	—
15/32	.4688	.500	.813	4.125	2	C52162	—	—
31/64	.4844	.500	.813	4.125	2	C32844	—	—
1/2	.5000	.500	.813	4.125	2	C52163	C32871	C32904
9/16	.5625	.625	1.125	5.000	2	C52164	C32872	C32905
5/8	.6250	.625	1.125	5.000	2	C52165	C32873	C32906
11/16	.6875	.750	1.313	5.625	2	C52166	C32874	C32907
3/4	.7500	.750	1.313	5.625	2	C52167	C32875	C32908
13/16	.8125	.875	1.563	6.125	2	C32845	C32876	C32909
7/8	.8750	.875	1.563	6.125	2	C52168	C32877	C32910
15/16	.9375	1.000	1.625	6.375	2	C32846	C32878	C32911
1	1.0000	1.000	1.625	6.375	2	C52169	C32879	C32912

Material Reference	Steel (HRC)				Stainless Steel		Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
	Hardness											
	TiN	★		★	★	★						
	TiCN	☆		☆	☆	☆				★	★	
☆ = Best Performance ★ = Acceptable												

Style: **HDC-4C - Double End**


Finisher

NoteOperating parameters
begin on page 310.M42
CobaltANSI
SIZESSurface
Treatment

Bright

TiN

TiCN

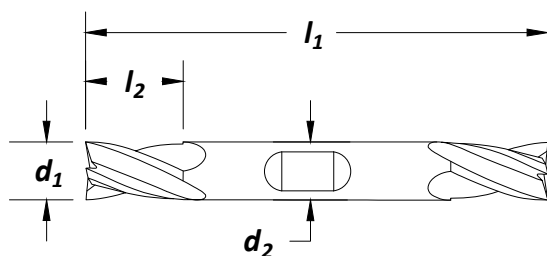**Feature:**

High red hardness for high heat conditions.



cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number HDC-4C		
						Bright	TiN	TiCN
1/8	.1250	.375	.375	3.063	4	C52170	C32941	C32974
9/64	.1406	.375	.438	3.125	4	C32927	—	C32975
5/32	.1562	.375	.438	3.125	4	C52171	—	C32976
11/64	.1719	.375	.500	3.250	4	C32928	—	C32977
3/16	.1875	.375	.500	3.250	4	C52172	C32945	C32978
13/64	.2031	.375	.563	3.250	4	C32929	—	C32979
7/32	.2188	.375	.563	3.250	4	C52173	—	C32980
15/64	.2344	.375	.625	3.375	4	C32930	—	C32981
1/4	.2500	.375	.625	3.375	4	C52174	C32949	C32982
17/64	.2656	.375	.688	3.375	4	C32931	—	C32983
9/32	.2812	.375	.688	3.375	4	C52175	—	C32984
19/64	.2969	.375	.750	3.500	4	C32932	—	C32985
5/16	.3125	.375	.750	3.500	4	C52176	C32953	C32986
21/64	.3281	.375	.750	3.500	4	C32933	—	C32987
11/32	.3438	.375	.750	3.500	4	C52177	—	C32988
23/64	.3594	.375	.750	3.500	4	C32934	—	C32989
3/8	.3750	.375	.750	3.500	4	C52178	C32957	C32990
25/64	.3906	.500	1.000	4.500	4	C32935	—	C32991
13/32	.4062	.500	1.000	4.500	4	C52179	—	C32992
27/64	.4219	.500	1.000	4.500	4	C32936	—	C32993
7/16	.4375	.500	1.000	4.500	4	C52180	C32961	C32994
29/64	.4531	.500	1.000	4.500	4	C32937	—	C32995
15/32	.4688	.500	1.000	4.500	4	C52181	—	C32996
31/64	.4844	.500	1.000	4.500	4	C32938	—	C32997
1/2	.5000	.500	1.000	4.500	4	C52182	C32965	C32998
9/16	.5625	.625	1.375	5.000	4	C52183	C32966	C32999
5/8	.6250	.625	1.375	5.000	4	C52184	C32967	C33000
11/16	.6875	.750	1.625	5.625	4	C52185	—	C33001
3/4	.7500	.750	1.625	5.625	4	C52186	C32969	C33002
13/16	.8125	.875	1.875	6.125	4	C32939	—	C33003
7/8	.8750	.875	1.875	6.125	4	C52187	—	C33004
15/16	.9375	1.000	1.875	6.375	4	C32940	C32972	C33005
1	1.0000	1.000	1.875	6.375	4	C52188	C32973	C33006

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	★		★	★	★							
	TiCN	☆		☆	☆	☆	★				★	★	
☆ = Best Performance ★ = Acceptable													

Finisher

Style: **HGC-2 - Single End**

Note
Operating parameters
begin on page 310.

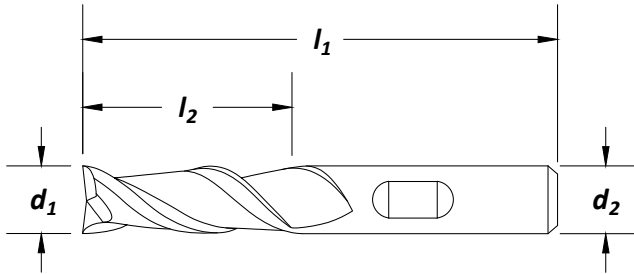ANSI
SIZESM42
CobaltSurface
Treatment**Feature:**

High red hardness for high heat conditions.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						Bright	HGC-2 TiN	TiCN
1/8	.1250	.375	.188	2.125	2	C75126	C75136	C75146
1/8	.1250	.375	.375	2.313	2	C42602	C32498	C32527
1/8	.1250	.375	.750	2.625	2	C75127	C75137	C75147
5/32	.1562	.375	.438	2.375	2	C32480	C32499	C32528
11/64	.1719	.375	.438	2.375	2	C32481	C32500	C32529
3/16	.1875	.375	.438	2.375	2	C42604	C32501	C32530
13/64	.2031	.375	.500	2.438	2	C32482	C32502	C32531
7/32	.2188	.375	.500	2.438	2	C32483	C32503	C32532
15/64	.2344	.375	.500	2.438	2	C32484	C32504	C32533
1/4	.2500	.375	.500	2.438	2	C42607	C32505	C32534
17/64	.2656	.375	.563	2.500	2	C32485	C32506	C32535
9/32	.2812	.375	.563	2.500	2	C32486	C32507	C32536
19/64	.2969	.375	.563	2.500	2	C32487	C32508	C32537
5/16	.3125	.375	.563	2.500	2	C42609	C32509	C32538
21/64	.3281	.375	.563	2.500	2	C32488	C32510	C32539
11/32	.3438	.375	.563	2.500	2	C32489	C32511	C32540
23/64	.3594	.375	.563	2.500	2	C32490	C32512	C32541
3/8	.3750	.375	.563	2.500	2	C42612	C32513	C32542
3/8	.3750	.375	1.000	2.750	2	C75128	C75138	C75148
3/8	.3750	.375	1.500	3.250	2	C75129	C75139	C75149
25/64	.3906	.375	.813	2.688	2	C32491	C32514	C32543
13/32	.4062	.375	.813	2.688	2	C32492	C32515	C32544
27/64	.4219	.375	.813	2.688	2	C32493	C32516	C32545
7/16	.4375	.375	.813	2.688	2	C32494	C32517	C32546
29/64	.4531	.500	1.000	3.250	2	C32495	C32518	C32547
15/32	.4688	.500	1.000	3.250	2	C32496	C32519	C32548
31/64	.4844	.500	1.000	3.250	2	C32497	C32520	—
1/2	.5000	.375	.813	2.688	2	C75130	C75140	C75150
1/2	.5000	.500	1.000	3.250	2	C42616	C32521	C32550
1/2	.5000	.500	1.500	3.500	2	C75131	C75141	C75151
1/2	.5000	.500	2.000	4.000	2	C75132	C75142	C75152
9/16	.5625	.500	1.125	3.375	2	C75133	C75143	C75153
5/8	.6250	.500	1.125	3.375	2	C75134	C75144	C75154
5/8	.6250	.625	1.313	3.750	2	C42619	C32522	C32551

continued on next page

Style: HGC-2 - Single End (continued)
Finisher

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						Bright	HGC-2 TiN	TiCN
3/4	.7500	.500	1.313	3.625	2	C75135	C75145	C75155
3/4	.7500	.750	1.313	3.875	2	C42622	C32523	C32552
3/4	.7500	.750	1.750	4.000	2	C75156	C75165	C75174
3/4	.7500	.750	2.250	4.500	2	C75157	C75166	C75175
7/8	.8750	.625	1.500	4.000	2	C75158	C75167	C75176
7/8	.8750	.750	1.500	4.125	2	C75159	C75168	C75177
1	1.0000	.625	1.500	4.000	2	C75160	C75169	C75178
1	1.0000	.750	1.500	4.125	2	C75161	C75170	C75179
1	1.0000	1.000	1.625	4.500	2	C42629	C32524	C32553
1	1.0000	1.000	2.250	4.750	2	C75162	C75171	C75180
1	1.0000	1.000	3.000	5.500	2	C75163	C75172	C75181
1-1/4	1.2500	.7500	1.625	3.875	2	C75164	C75173	C75182
1-1/4	1.2500	1.250	1.625	4.500	2	C42633	C32525	C32554

Cobalt
Center Cutting


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32				>45
TiN	★		★		★	★							
TiCN	★		★		★	★	★				★	★	

★ = Best Performance ◆ = Acceptable

Finisher

Style: **HGC-2B - Single End****Note**

Operating parameters
begin on page 310.

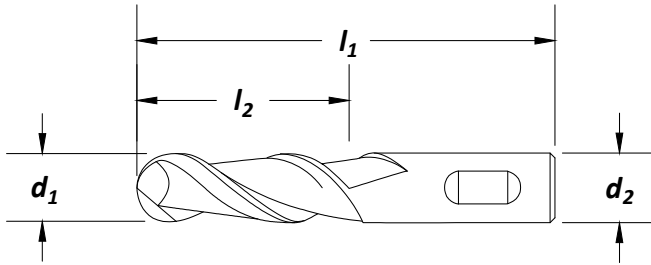ANSI
SIZESM42
CobaltSurface
Treatment**Feature:**

High red hardness for high heat conditions.


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						HGC-2B Bright	TiN	TiCN
1/8	.1250	.375	.375	2.313	2	C42643	C32737	C32749
3/16	.1875	.375	.500	2.375	2	C42645	C32738	C32750
1/4	.2500	.375	.625	2.438	2	C42648	C32739	C32751
5/16	.3125	.375	.750	2.500	2	C42650	C32740	C32752
3/8	.3750	.375	.750	2.500	2	C42653	C32741	C32753
1/2	.5000	.500	1.000	3.250	2	C42657	C32742	C32754
5/8	.6250	.625	1.625	3.750	2	C42660	C32743	C32755
3/4	.7500	.750	1.625	3.875	2	C42663	C32744	C32756
7/8	.8750	.875	2.000	4.250	2	C32736	C32745	C32757
1	1.0000	1.000	2.250	4.500	2	C42670	C32746	C32758

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
TiN	★		★		★	★							
TiCN	☆		☆		☆	☆	★				★	★	
☆ = Best Performance ★ = Acceptable													

Style: HGC-4C - Single End
Finisher

Note
Operating parameters
begin on page 310.

**ANSI
SIZES**
**M42
Cobalt**

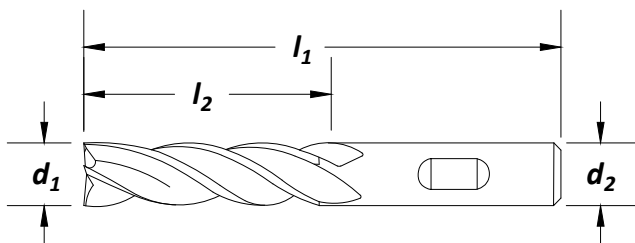**Surface
Treatment**

Feature:

High red hardness for high heat conditions. Heavy cross-section for high rigidity.

cutting diameter d ₁	decimal equiv.	shank dia d ₂ (in)	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	order number		
						Bright	HGC-4C TiN	TiCN
1/8	.1250	.375	.375	2.313	4	C42684	C32574	C32610
5/32	.1562	.375	.500	2.375	4	C32556	C32575	C32611
11/64	.1719	.375	.500	2.375	4	C32557	C32576	C32612
3/16	.1875	.375	.500	2.375	4	C42686	C32577	C32613
13/64	.2031	.375	.625	2.438	4	C32558	C32578	C32614
7/32	.2188	.375	.625	2.438	4	C32559	C32579	C32615
15/64	.2344	.375	.625	2.438	4	C32560	C32580	C32616
1/4	.2500	.375	.625	2.438	4	C42689	C32581	C32617
1/4	.2500	.375	1.250	3.063	4	C32646	C32655	C32673
1/4	.2500	.375	1.750	3.563	4	C32691	C32700	C32718
17/64	.2656	.375	.750	2.500	4	C32561	C32582	C32618
9/32	.2812	.375	.750	2.500	4	C32562	C32583	C32619
9/32	.2812	.375	1.375	3.125	4	C32647	C32656	C32674
9/32	.2812	.375	2.000	3.250	4	C32692	C32701	C32719
19/64	.2969	.375	.750	2.500	4	C32563	C32584	C32620
5/16	.3125	.375	.750	2.500	4	C42691	C32585	C32621
5/16	.3125	.375	1.375	3.125	4	C32648	C32657	C32675
5/16	.3125	.375	2.000	3.7 50	4	C32693	C32702	C32720
21/64	.3281	.375	.750	2.500	4	C32564	C32586	C32622
11/32	.3438	.375	.750	2.500	4	C32565	C32587	C32623
11/32	.3438	.375	1.500	3.250	4	C32649	C32658	C32676
11/32	.3438	.375	2.500	4.250	4	C32694	C32703	C32721
23/64	.3594	.375	.750	2.500	4	C32566	C32588	C32624
3/8	.3750	.375	.750	2.500	4	C42694	C32589	C32625
3/8	.3750	.375	1.500	3.250	4	C42857	C32659	C32677
3/8	.3750	.375	2.500	4.250	4	C42913	C32704	C32722
25/64	.3906	.375	1.000	2.688	4	C32567	C32590	C32626
13/32	.4062	.375	1.000	2.688	4	C32568	C32591	C32627
13/32	.4062	.375	1.750	3.250	4	C32650	C32660	C32678
13/32	.4062	.375	2.750	4.500	4	C32695	C32705	C32723
27/64	.4219	.375	1.000	2.688	4	C32569	C32592	C32628

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
TiN	★		★		★	★							
TiCN	★		★		★	★	★				★	★	

★ = Best Performance ★ = Acceptable

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number HGC-4C		
						Bright	TiN	TiCN
7/16	.4375	.375	1.000	2.688	4	C32570	C32593	C32629
7/16	.4375	.375	1.750	3.250	4	C32651	C32661	C32679
7/16	.4375	.375	2.750	4.500	4	C32696	C32706	C32724
29/64	.4531	.500	1.250	3.250	4	C32571	C32594	C32630
15/32	.4688	.500	1.250	3.250	4	C32572	C32595	C32631
15/32	.4688	.500	2.000	4.000	4	C32652	C32662	C32680
15/32	.4688	.500	2.000	5.000	4	C32697	C32707	C32725
31/64	.4844	.500	1.250	3.250	4	C32573	C32596	C32632
1/2	.5000	.500	1.250	3.250	4	C42699	C32597	C32633
1/2	.5000	.500	1.250	3.250	6	C42698	C32598	C32634
1/2	.5000	.500	2.000	4.000	4	C42861	C32663	C32681
1/2	.5000	.500	2.000	5.000	4	C42917	C32708	C32726
5/8	.6250	.625	1.625	3.750	4	C42703	C32599	C32635
5/8	.6250	.625	1.625	3.750	6	C42702	C32600	C32636
5/8	.6250	.625	2.500	4.625	4	C42864	C32664	C32682
5/8	.6250	.625	4.000	6.125	4	C42920	C32709	C32727
3/4	.7500	.750	1.625	3.875	4	C42707	C32601	C32637
3/4	.7500	.750	1.625	3.875	6	C42706	C32602	C32638
3/4	.7500	.750	3.000	5.250	4	C42868	C32665	C32683
3/4	.7500	.750	3.000	5.250	6	C42867	C32666	C32684
3/4	.7500	.750	4.000	6.250	4	C42924	C32710	C32728
3/4	.7500	.750	4.000	6.250	6	C42923	C32711	C32729
7/8	.8750	.875	3.500	5.750	4	C32653	C32667	C32685
7/8	.8750	.875	3.500	5.750	6	C32654	C32668	C32686
1	1.0000	1.000	2.000	4.500	4	C42715	C32603	C32639
1	1.0000	1.000	2.000	4.500	6	C42714	C32604	C32640
1	1.0000	1.000	4.000	6.500	4	C42876	C32669	C32687
1	1.0000	1.000	4.000	6.500	6	C42875	C32670	C32688
1	1.0000	1.000	6.000	8.500	4	C42932	C32712	C32730
1	1.0000	1.000	6.000	8.500	6	C42931	C32713	C32731
1-1/4	1.2500	1.250	2.000	4.500	4	C42720	C32605	C32641
1-1/4	1.2500	1.250	2.000	4.500	6	C42719	C32606	C32642
1-1/4	1.2500	1.250	4.000	6.500	4	C42881	C32671	C32689
1-1/4	1.2500	1.250	4.000	6.500	6	C42880	C32672	C32690
1-1/4	1.2500	1.250	6.000	8.500	4	C42937	C32714	C32732
1-1/4	1.2500	1.250	6.000	8.500	6	C42936	C32715	C32733
1-1/2	1.5000	1.250	2.000	4.500	4	C42727	C32607	C32643
1-1/2	1.5000	1.250	2.000	4.500	6	C42726	C32608	C32644
1-1/2	1.5000	1.250	8.000	10.500	4	C32698	C32716	C32734
1-1/2	1.5000	1.250	8.000	10.500	6	C32699	C32717	C32735
2	2.0000	2.000	4.000	7.750	6	C42731	C32609	C32645

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
TiN	★		★		★	★							
TiCN	☆		☆		☆	☆	★				★	★	
☆ = Best Performance ★ = Acceptable													

Style: HGC-4B - Single End
Finisher
 Multi Flute

Note
 Operating parameters
 begin on page 310.

 ANSI
 SIZES


 M42
 Cobalt

 Surface
 Treatment

Bright

TiN

TiCN

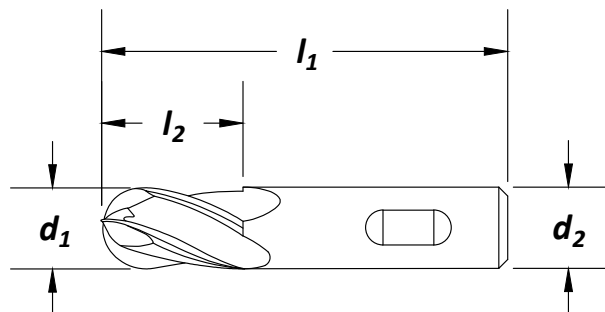
Feature:

High red hardness for high heat conditions. Heavy cross-section for high rigidity.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						Bright	HGC-4B TiN	TiCN
1/8	.1250	.375	.375	2.313	4	C42778	C32763	C32776
3/16	.1875	.375	.500	2.375	4	C42780	C32764	C32777
1/4	.2500	.375	.625	2.438	4	C42783	C32765	C32778
1/4	.2500	.375	1.750	3.563	4	C75011	C75013	C75015
5/16	.3125	.375	.750	2.500	4	C42785	C32766	C32779
3/8	.3750	.375	.750	2.500	4	C42788	C32767	C32780
1/2	.5000	.500	1.250	3.250	4	C42792	C32768	C32781
5/8	.6250	.625	1.625	3.750	4	C42795	C32769	C32782
3/4	.7500	.750	1.625	3.875	4	C42799	C32770	C32783
3/4	.7500	.750	1.625	3.875	6	C42798	C32771	C32784
3/4	.7500	.750	3.000	5.250	4	C75012	C75014	C75016
1	1.0000	1.000	2.000	4.500	4	C42807	C32772	C32785
1	1.0000	1.000	2.000	4.500	6	C42806	C32773	C32786
1-1/4	1.2500	1.250	2.000	4.500	6	C32761	C32774	C32787
1-1/2	1.5000	1.250	2.000	4.500	6	C32762	C32775	C32788

Cobalt

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
Bright													
TiN	★		★		★	★							
TiCN	☆		☆		☆	☆	★				★	★	

☆ = Best Performance

★ = Acceptable

Styles: **RG6, RG6-TC, RG6-TA**

ANSI
SIZES

M42
Cobalt




Surface
Treatment

Bright

TiCN

TiAlN

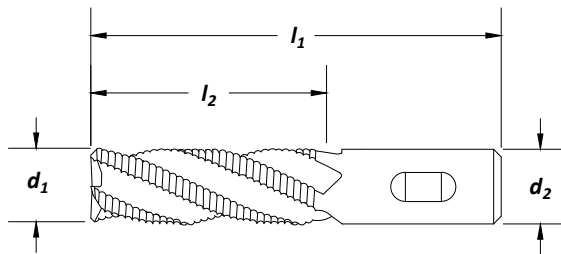

Feature:

Center cutting design for rapid plunge cutting. Heavy cross-section for high rigidity. High red hardness for high heat conditions.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						RG6 Bright	RG6-TC TiCN	RG6-TA TiAlN
3/16	.1875	.375	.500	2.375	4	C30733	—	—
1/4	.2500	.375	.250	2.063	4	C31160	C31279	—
1/4	.2500	.375	.625	2.438	4	C30826	C30976	—
1/4	.2500	.375	1.250	3.125	4	C30827	—	—
5/16	.3125	.375	.750	2.500	4	C30828	C30977	—
3/8	.3750	.375	.375	2.156	4	C31161	C31280	C31060
3/8	.3750	.375	.750	2.500	4	C30829	C30978	C31054
3/8	.3750	.375	1.500	3.250	4	C30830	C30979	—
7/16	.4375	.500	1.250	3.250	4	C30734	—	—
1/2	.5000	.500	.500	2.500	4	C31162	C31281	C31056
1/2	.5000	.500	1.250	3.250	4	C30831	C30980	C31055
1/2	.5000	.500	2.000	4.000	4	C30832	C30981	—
5/8	.6250	.625	.625	2.750	4	C31163	C31282	C31053
5/8	.6250	.625	1.625	3.750	4	C30833	C30982	C31044
5/8	.6250	.625	2.500	4.625	4	C30834	C30983	—
3/4	.7500	.750	.750	2.875	4	C30837	C30986	C31058
3/4	.7500	.750	1.625	3.875	4	C30835	C30984	C31057
3/4	.7500	.750	3.000	5.250	4	C30836	C30985	—
7/8	.8750	.875	.875	3.125	5	C31164	C31283	—
7/8	.8750	.875	1.875	4.125	5	C31165	—	—
1	1.0000	1.000	1.000	3.500	5	C31166	C31284	C31063
1	1.0000	1.000	2.000	4.500	5	C30838	C30987	C31059
1	1.0000	1.000	3.000	5.500	5	C30839	C30988	C31087
1	1.0000	1.000	4.000	6.500	5	C30840	C30989	—
1-1/4	1.2500	1.250	2.000	4.500	6	C31167	C31285	C31064
1-1/4	1.2500	1.250	3.000	5.500	6	C31168	C31286	C31098
1-1/4	1.2500	1.250	4.000	6.500	6	C31169	C31287	—

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				
	Hardness												
TiN	★	★	★	★	★	★	★				★	★	
TiAlN	★	★	★	★	★	★	★						


★ = Best Performance ★ = Acceptable

Styles: **RG8, RG8-TC, RG8-TA**

Rougher
Course Pitch



Surface Treatment

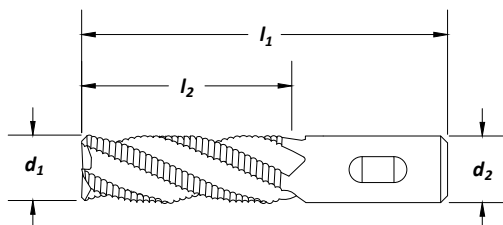

Feature:

Center cutting design for rapid plunge cutting. Heavy cross-section for high rigidity. High red hardness for high heat conditions.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						RG8 Bright	RG8-TC TiCN	RG8-TA TiAlN
3/16	.1875	.375	.500	2.375	4	C30709	—	—
1/4	.2500	.375	.250	2.063	3	C31173	C31291	—
1/4	.2500	.375	.625	2.438	4	C31174	C31292	—
1/4	.2500	.375	1.250	3.125	4	C31175	—	—
5/16	.3125	.375	.750	2.500	4	C31176	C31293	—
3/8	.3750	.375	.375	2.156	4	C31177	C31294	C31065
3/8	.3750	.375	.750	2.500	4	C31178	C31295	C31067
3/8	.3750	.375	1.500	3.250	4	C31179	C31296	—
7/16	.4375	.500	1.250	3.250	4	C30710	—	—
1/2	.5000	.500	.500	2.500	4	C31180	C31297	C31069
1/2	.5000	.500	1.250	3.250	4	C31181	C31298	C31070
1/2	.5000	.500	2.000	4.000	4	C31182	C31299	C31109
1/2	.5000	.500	3.000	5.000	4	C30732	—	—
5/8	.6250	.625	.625	2.750	4	C31183	C31300	C31071
5/8	.6250	.625	1.625	3.750	4	C31184	C31301	C31072
5/8	.6250	.625	2.500	4.625	4	C31190	C31302	—
3/4	.7500	.750	.750	2.875	4	C31193	C31303	C31074
3/4	.7500	.750	1.625	3.875	4	C31194	C31304	C31075
3/4	.7500	.750	3.000	5.250	4	C31195	C31305	—
3/4	.7500	3/4	4.000	6.250	4	C75344	C75357	—
7/8	.8750	3/4	1.875	4.125	5	C75345	C75358	—
7/8	.8750	7/8	1.875	4.125	5	C75346	C75359	—
1	1.0000	.750	2.000	4.250	5	C75347	—	—
1	1.0000	1.000	2.000	4.500	5	C31197	C31306	C31076
1	1.0000	1.000	3.000	5.500	5	C31198	C31307	C31111
1	1.0000	1.000	4.000	6.500	5	C31199	C31308	—
1-1/8	1.1250	.750	2.000	4.250	6	C75348	—	—
1-1/4	1.2500	.750	2.000	4.250	6	C75349	—	—
1-1/4	1.2500	1.250	4.000	6.500	6	C31205	—	—

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
TiN	★		★		★	★							
TiAlN	☆	★	☆	★	☆	☆	★						

☆ = Best Performance ★ = Acceptable

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number		
						RG8 Bright	RG8-TC TiCN	RG8-TA TiAlN
1-1/2	1.5000	1.250	2.000	5.500	6	C75350	—	—
1-1/2	1.5000	1.250	2.000	4.250	6	C75351	C75360	—
1-1/2	1.5000	1.250	4.000	6.500	6	C75352	C75387	—
1-1/2	1.5000	1.250	6.000	8.500	6	C75353	C75388	—
2	2.0000	.750	2.000	4.250	8	C75354	—	—
2	2.0000	1.250	2.000	4.500	8	C75355	C75361	—
2	2.0000	1.250	4.000	6.500	8	C75356	C75362	—
2	2.0000	2.000	4.000	7.500	8	C75389	—	—
2	2.0000	2.000	4.000	7.750	6	C31208	C31313	—
2	2.0000	2.000	6.000	9.750	6	C31209	C31314	—
2	2.0000	2.000	6.000	9.750	8	C75390	—	—
2	2.0000	2.000	8.000	11.750	8	C75391	—	—


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	TiN	★		★	★	★							
	TiAlN	☆	★	☆	★	☆	★						

☆ = Best Performance ★ = Acceptable

Styles: RG9, RG9-TC
Rougher
 Extra Course Pitch

 Surface
 Treatment


 Bright

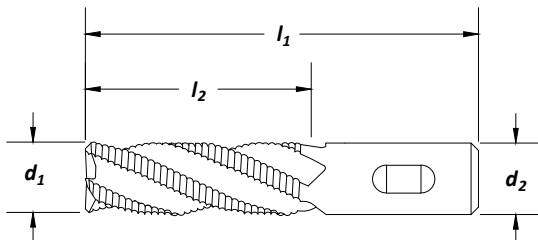
 TiCN

Feature:

Center cutting design for rapid plunge cutting. Heavy cross-section for high rigidity. High red hardness for high heat conditions.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number	
						RG9 Bright	RG9-TC TiCN
3/8	.3750	.375	.750	2.500	3	C30780	—
3/8	.3750	.375	1.500	3.250	3	C30720	—
1/2	.5000	.500	1.250	3.250	3	C30781	C31115
1/2	.5000	.500	2.000	4.000	3	C30782	—
1/2	.5000	.500	3.000	5.000	3	C30721	—
5/8	.6250	.625	1.625	3.750	3	C30783	C31117
3/4	.7500	.750	1.625	3.875	3	C30785	C31119
3/4	.7500	.750	2.250	4.500	3	C30786	—
3/4	.7500	.750	3.000	5.250	3	C30722	C31106
3/4	.7500	.750	4.000	6.250	3	C30723	—
7/8	.8750	.750	1.500	3.750	3	C30788	—
7/8	.8750	.875	1.875	4.125	3	C30787	—
1	1.0000	.750	1.500	3.750	3	C30791	—
1	1.0000	1.000	2.000	4.500	3	C30789	C31121
1	1.0000	1.000	3.000	5.500	3	C30790	C31122
1	1.0000	1.000	4.000	6.500	3	C30724	—
1	1.0000	1.000	6.000	8.500	3	C30725	—

Cobalt

Center Cutting

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness										♦			
Bright										☆			
TiCN													


☆ = Best Performance ♦ = Acceptable

Style: **PM-4DE** - Double End**Note**

Operating parameters
begin on page 310.



Surface
Treatment

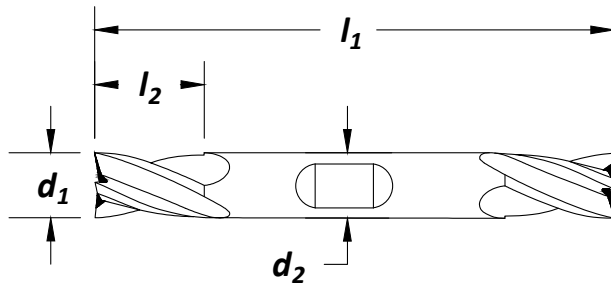**Feature:**


Double productivity with double ended end mills.

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number PM-4DE	
						Bright	TiCN
1/8	.1250	.375	.375	3.063	4	C52189	C31903
5/32	.1562	.375	.438	3.250	4	C39968	C31904
3/16	.1875	.375	.500	3.250	4	C52190	C31905
7/32	.2188	.375	.563	3.250	4	C39969	C31906
1/4	.2500	.375	.625	3.375	4	C52191	C31907
9/32	.2812	.375	.688	3.375	4	C39970	C31908
5/16	.3125	.375	.750	3.500	4	C52192	C31909
11/32	.3438	.375	.750	3.500	4	C39971	C31910
3/8	.3750	.375	.750	3.500	4	C52193	C31911
13/32	.4062	.500	1.000	4.125	4	C39972	C31912
7/16	.4375	.500	1.000	4.125	4	C52194	C31913
15/32	.4688	.500	1.000	4.125	4	C39973	—
1/2	.5000	.500	1.000	4.125	4	C52195	C31915
9/16	.5625	.625	1.375	5.000	4	C39974	C31916
5/8	.6250	.625	1.375	5.000	4	C52196	C31896
11/16	.6875	.750	1.625	5.625	4	C31879	C31918
3/4	.7500	.750	1.625	5.625	4	C52197	C31919
13/16	.8125	.875	1.875	6.125	4	C31880	—
7/8	.8750	.875	1.875	6.125	4	C52198	C31921
15/16	.9375	1.000	1.875	6.375	4	C31881	—
1	1.0000	1.000	1.875	6.375	4	C52199	C31923

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	>38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright												
	TiCN												
☆ = Best Performance ◆ = Acceptable													

Style: PM-2 - Single End
Finisher
PM Plus™
Note

Operating parameters
begin on page 310.

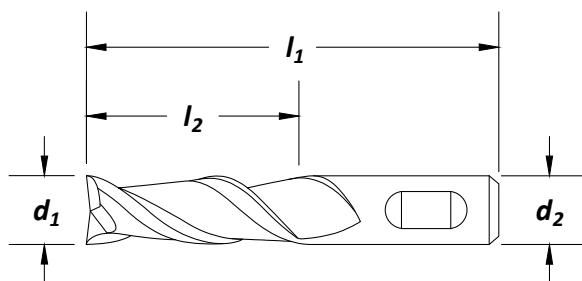
**Surface
Treatment**


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number PM-2		
						Bright	TiN	TiCN
1/8	.1250	.375	.375	2.313	2	C40792	C40809	C40826
3/16	.1875	.375	.500	2.375	2	C40793	C40810	C40827
1/4	.2500	.375	.625	2.438	2	C40794	C40811	C40828
5/16	.3125	.375	.750	2.500	2	C40795	C40812	C40829
3/8	.3750	.375	.750	2.500	2	C40796	C40813	C40830
7/16	.4375	.500	1.000	2.688	2	C40797	C40814	C40831
1/2	.5000	.500	1.250	3.250	2	C40798	C40815	C40832
9/16	.5625	.500	1.375	3.375	2	C40799	C40816	C40833
5/8	.6250	.625	1.625	3.250	2	C40800	C40817	C40834
11/16	.6875	.625	1.625	3.250	2	C40801	C40818	C40835
3/4	.7500	.750	1.625	3.875	2	C40802	C40819	C40836
7/8	.8750	.875	1.875	4.125	2	C40803	C40820	C40837
1	1.0000	1.000	2.000	4.500	2	C40804	C40821	C40838



TECH TIP
PM Plus High-Performance End Mills Deliver Superior Performance

- 8% cobalt substrate.
- High vanadium for high red hardness means exceptional toughness and high shock resistance.
- Runs at higher feeds than conventional HSS or cobalt end mills.
- Provide excellent heat and wear resistance.
- Freer cutting minimizes heat build up.
- Gives excellent finish

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright												
	TiN												
	TiCN												

☆ = Best Performance

◆ = Acceptable

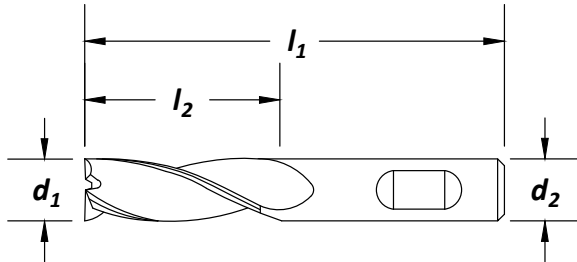
Style: **PM-3** - Single End**Note**Operating parameters
begin on page 310.Surface
Treatment

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number	
						PM-3 Bright	TiCN
1/2	.5000	.500	1.250	3.250	3	C49272	C39950
5/8	.6250	.625	1.625	3.750	3	C49275	C39951
3/4	.7500	.750	1.625	3.875	3	C49277	C39952
3/4	.7500	.750	3.000	5.250	3	C49278	C39962
1	1.0000	1.000	2.000	4.500	3	C49283	C39953
1	1.0000	1.000	3.000	5.500	3	C49284	C39963
1	1.0000	1.000	4.000	6.500	3	C49285	C39964

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright													
TiCN													
☆ = Best Performance ◆ = Acceptable													

Style: PM-4 - Single End
Finisher
 PM Plus™, Multi Flute

Note
 Operating parameters
 begin on page 310.

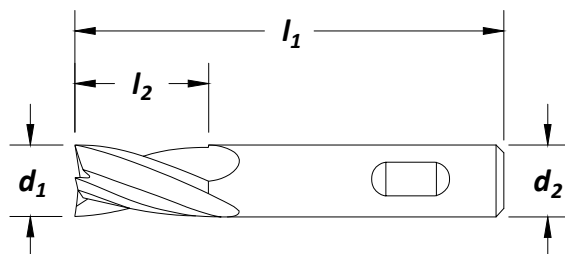
Surface Treatment


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						Bright	PM-4 TiN	TiCN
1/8	.1250	.375	.250	2.188	4	C43208	C31924	C31939
1/8	.1250	.375	.375	2.313	4	C42500	C31960	C31987
5/32	.1562	.375	.500	2.375	4	C43280	C31961	C31988
3/16	.1875	.375	.250	2.125	4	C43209	C31925	C31940
3/16	.1875	.375	.500	2.375	4	C42502	C31962	C31989
7/32	.2188	.375	.625	2.438	4	C43281	C31963	C31990
1/4	.2500	.375	.250	2.063	4	C43210	C31926	C31941
1/4	.2500	.375	.625	2.438	4	C42504	C31964	C31991
1/4	.2500	.375	1.250	3.063	4	C43290	C32016	C32032
9/32	.2812	.375	.750	2.500	4	C43282	C31965	C31992
5/16	.3125	.375	.375	2.125	4	C43211	C31927	C31942
5/16	.3125	.375	.750	2.500	4	C42506	C31966	C31993
5/16	.3125	.375	1.375	3.125	4	C43291	C32017	C32033
11/32	.3438	.375	.750	2.500	4	C43283	C31967	C31994
3/8	.3750	.375	.375	2.125	4	C43212	C31928	C31943
3/8	.3750	.375	.750	2.500	4	C42508	C31968	C31995
3/8	.3750	.375	1.500	3.250	4	C43292	C32018	C32034
13/32	.4062	.500	1.000	2.688	4	C43284	C31969	C31996
7/16	.4375	.375	1.750	3.250	4	C32014	C32019	C32035
7/16	.4375	.500	.500	2.188	4	C43213	C31929	C31944
7/16	.4375	.500	1.000	2.688	4	C43285	C31970	C31997

continued on next page


Benefits of Multi Flute End Mills

- Generally, multi flute end mills give smoother finishes than 2 Flute end mills.
- Increased number of flutes mean more cutting edges, providing more cutting action.

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright													
TiN													
TiCN													

☆ = Best Performance


◆ = Acceptable

cutting diameter	decimal equiv.	shank dia d ₂ (in)	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	order number		
						PM-4		
d ₁		d ₂ (in)	l ₂ (in)	l ₁ (in)		Bright	TiN	TiCN
1/2	.5000	.500	.500	2.500	4	C43214	C31930	C31945
1/2	.5000	.500	1.250	3.500	4	C42510	C31972	C31999
1/2	.5000	.500	2.000	4.000	4	C43293	C32020	C32036
9/16	.5625	.500	1.375	3.375	4	C31955	C31973	C32000
5/8	.6250	.625	.625	2.750	4	C43215	C31931	C31946
5/8	.6250	.625	.625	2.750	6	C43216	C31932	C31947
5/8	.6250	.625	1.625	3.750	4	C42512	C31974	C32001
5/8	.6250	.625	2.500	4.625	4	C43294	C32021	C32037
11/16	.6875	.625	1.625	3.750	4	C31956	C31975	C32002
3/4	.7500	.750	.750	3.000	4	C43217	C31933	C31948
3/4	.7500	.750	.750	3.000	6	C43218	C31934	C31949
3/4	.7500	.750	1.625	3.875	4	C42514	C31976	C32003
3/4	.7500	.750	1.625	3.875	6	C42516	C31977	C32004
3/4	.7500	.750	2.000	5.250	4	C43295	C32022	C32038
13/16	.8125	.875	1.875	4.125	4	C31957	C31978	C32005
7/8	.8750	.875	.875	3.125	4	C43219	C31935	C31950
7/8	.8750	.875	.875	3.125	4	C43220	C31936	C31951
7/8	.8750	.875	1.875	4.125	4	C31958	C31979	C32006
7/8	.8750	.875	3.500	5.750	4	C32015	C32023	C32039
15/16	.9375	1.000	1.875	4.500	4	C31959	C31980	C32007
1	1.0000	1.000	1.000	3.500	4	C43221	C31938	C31953
1	1.0000	1.000	1.000	3.500	6	C43222	C31937	C31952
1	1.0000	1.000	2.000	4.500	4	C42518	C31981	C32008
1	1.0000	1.000	2.000	4.500	6	C42520	C31982	C32009
1	1.0000	1.000	2.000	5.500	4	C43286	C32024	C32040
1	1.0000	1.000	4.000	6.500	4	C43296	C32025	C32041
1-1/8	1.1250	1.000	1.125	4.500	6	C43223	C31983	C32010
1-1/4	1.2500	1.250	2.000	4.500	6	C43224	C31984	C32011
1-1/4	1.2500	1.250	4.000	6.500	6	C43297	C32027	C32043

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright												
	TiN												
	TiCN												
☆ = Best Performance ♦ = Acceptable													

Style: PM-4B - Single End
Finisher
PM Plus™
Note


Operating parameters
begin on page 310.

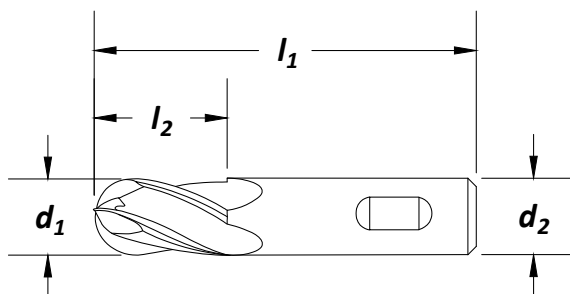
**Surface
Treatment**


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number PM-4B	
						Bright	TiCN
1/8	.1250	.375	.375	2.313	4	C42550	C32057
3/16	.1875	.375	.500	2.313	4	C42552	C32058
1/4	.2500	.375	.625	2.438	4	C42554	C32059
5/16	.3125	.375	.750	2.500	4	C42556	C32060
3/8	.3750	.375	.750	2.500	4	C42558	C32061
1/2	.5000	.500	1.250	3.250	4	C42560	C32062
5/8	.6250	.625	1.625	3.750	4	C42562	C32063
3/4	.7500	.750	1.625	3.875	4	C42564	C32064
1	1.0000	1.000	2.000	4.500	4	C42566	C32065

Powdered Metal
Center Cutting

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright													
TiCN													
☆ = Best Performance ◆ = Acceptable													

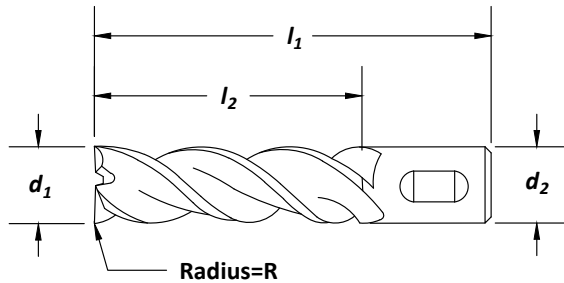Style: **PM-539R** - Single End**Note**Operating parameters
begin on page 310.Surface
Treatment

order number

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	PM-539R				
						Bright R = 0°	TiCN R = 0°	TiCN R = .060°	TiCN R = .090°	TiCN R = .120°
3/8	.3750	.375	.750	2.500	3	C40072	C40073	—	—	—
3/8	.3750	.375	1.500	3.250	3	C40074	C40075	—	—	—
1/2	.5000	.500	1.250	3.250	3	C40076	C40077	—	—	—
1/2	.5000	.500	2.000	4.000	3	C40078	C40079	—	—	—
1/2	.5000	.500	3.000	5.000	3	C40080	C40081	—	—	—
5/8	.6250	.625	1.625	3.750	3	C40082	C40083	—	—	—
5/8	.6250	.625	2.500	4.625	3	C40084	C40085	—	—	—
5/8	.6250	.625	3.000	5.125	3	C40086	C40087	—	—	—
3/4	.7500	.750	1.625	3.875	3	C40345	C40346	C40347	C40348	C40349
3/4	.7500	.750	2.250	4.500	3	C40390	C40391	C40392	C40393	C40394
3/4	.7500	.750	3.000	5.250	3	C40350	C40351	C40352	C40353	C40354
1	1.0000	1.000	2.000	4.500	3	C40355	C40356	C40357	C40358	C40359
1	1.0000	1.000	3.000	5.500	3	C40360	C40361	C40362	C40363	C40364
1	1.0000	1.000	4.000	6.500	3	C40365	C40366	C40367	C40368	C40369
1-1/4	1.2500	1.250	2.000	4.500	3	C40370	—	—	—	—
1-1/4	1.2500	1.250	3.000	5.500	3	C40375	—	—	—	—
1-1/4	1.2500	1.250	4.000	6.500	3	C40380	—	—	—	—
1-1/4	1.2500	1.250	6.000	8.500	3	C40385	—	—	—	—

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright												
	TiCN												
☆ = Best Performance ◆ = Acceptable													


Style: PM-539L - Single End
Finisher
 PM Plus™, Left, High Helix

Note

Left hand spiral.

Left hand cut.

 Operating parameters
 begin on page 310.

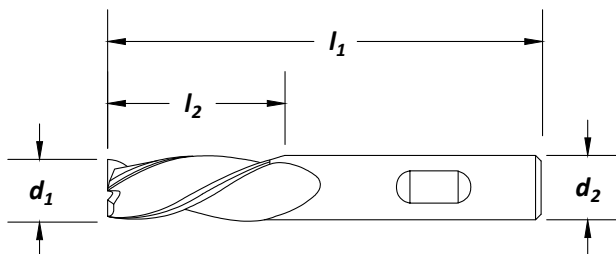 Surface
 Treatment


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number PM-539L	
						Bright	TiCN
1/2	.5000	.500	1.250	3.250	3	C40295	—
1/2	.5000	.500	2.000	4.000	3	C40296	—
1/2	.5000	.500	3.000	5.000	3	C40297	—
5/8	.6250	.625	1.625	3.750	3	C40298	—
5/8	.6250	.625	2.500	4.625	3	C40299	—
3/4	.7500	.750	1.625	3.875	3	C40300	C40301
3/4	.7500	.750	3.000	5.250	3	C40305	C40306
1	1.0000	1.000	2.000	4.500	3	C40310	C40311
1	1.0000	1.000	3.000	5.500	3	C40315	C40316
1	1.0000	1.000	4.000	6.500	3	C40320	C40321


TECH TIP
The PM-539 Advantage

- Exceptional speeds in aluminum.
- Quiet, chatter-free machining and high shear cutting.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright													
TiCN													

☆ = Best Performance


◆ = Acceptable

Note

Operating parameters
begin on page 310.



Surface
Treatment

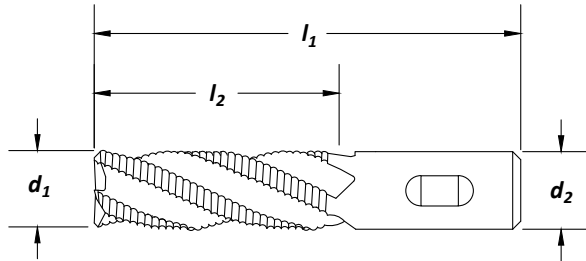


cutting diameter	decimal equiv.	shank dia d ₂ (in)	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	order number		
						PMRC-C		
d ₁		d ₂ (in)	l ₂ (in)	l ₁ (in)		Bright	TiN	TiCN
1/4	.2500	.375	.250	2.063	3	C43228	C32213	C32242
1/4	.2500	.375	.625	2.438	3	C43229	C32214	C32243
3/8	.3750	.375	.375	2.125	4	C43230	C32215	C32244
3/8	.3750	.375	.750	2.500	4	C43299	C32216	C32245
3/8	.3750	.375	1.500	3.250	4	C32210	C32217	C32246
1/2	.5000	.500	.500	2.500	4	C43231	C32218	C32247
1/2	.5000	.500	1.250	3.250	4	C43300	C32219	C32248
1/2	.5000	.500	2.000	4.000	4	C32211	C32220	C32249
5/8	.6250	.625	.625	2.750	4	C43232	C32221	C32250
5/8	.6250	.625	1.625	3.750	4	C43301	C32222	C32251
5/8	.6250	.625	2.500	4.625	4	C32212	C32223	C32252
3/4	.7500	.750	.750	3.000	4	C43233	C32224	C32253
3/4	.7500	.750	1.625	3.875	4	C43302	C32225	C32254
3/4	.7500	.750	3.000	5.250	4	C43303	C32226	C32255
7/8	.8750	.875	.875	3.125	5	C43234	C32227	C32256
1	1.0000	1.000	1.000	3.500	5	C43235	C32228	C32257
1	1.0000	1.000	2.000	4.500	5	C43236	C32229	C32258
1	1.0000	1.000	3.000	5.500	5	C43304	C32230	C32259
1	1.0000	1.000	4.000	6.500	5	C43305	C32231	C32260
1-1/8	1.1250	1.125	2.000	4.500	5	C43237	C32232	C32261
1-1/4	1.2500	1.250	2.000	4.500	5	C43238	C32233	C32262
1-1/4	1.2500	1.250	3.000	5.500	5	C43239	C32234	C32263
1-1/4	1.2500	1.250	4.000	6.500	5	C43306	C32235	C32264

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series						
	Bright												
	TiN												
	TiCN												
☆ = Best Performance ♦ = Acceptable													

Style: PMRF-C - Single End
Rougher
 PM Plus™, Multi Flute, Fine Pitch

Note

 Operating parameters
 begin on page 310.

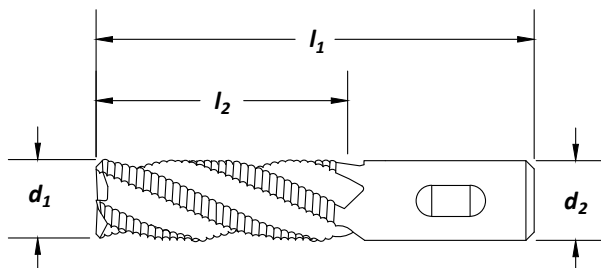 Surface
 Treatment


cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number		
						PMRF-C		
						Bright	TiCN	TiAlN
3/8	.3750	.375	.750	2.500	4	C41122	C41145	C41168
3/8	.3750	.375	1.500	3.250	4	C41134	C41157	C41180
1/2	.5000	.500	1.250	3.250	4	C41123	C41146	C41169
1/2	.5000	.500	2.000	4.000	4	C41135	C41158	C41181
5/8	.6250	.625	1.625	3.750	4	C41124	C41147	C41170
5/8	.6250	.625	2.500	4.625	4	C41136	C41159	C41182
3/4	.7500	.750	1.625	3.875	4	C41125	C41148	C41171
3/4	.7500	.750	2.250	4.500	4	C41130	C41153	C41176
3/4	.7500	.750	3.000	5.250	4	C41137	C41160	C41183
7/8	.8750	.875	1.875	4.125	5	C41126	C41149	C41172
7/8	.8750	.875	3.500	5.750	5	C41138	C41161	C41184
1	1.0000	1.000	2.000	4.500	5	C41127	C41150	C41173
1	1.0000	1.000	3.000	5.500	5	C41131	C41154	C41177
1	1.0000	1.000	4.000	6.500	5	C41139	C41162	C41185
1-1/4	1.2500	1.250	2.000	4.500	6	C41128	C41151	C41174
1-1/4	1.2500	1.250	3.000	5.500	6	C41132	C41155	C41178
1-1/4	1.2500	1.250	4.000	6.500	6	C41140	C41163	C41186
1-1/2	1.5000	1.250	3.000	5.500	6	C41133	C41156	—

Powdered Metal

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright												
	TiN												
	TiCN												

☆ = Best Performance


◆ = Acceptable

Styles: **PM-538R - Single End**

Note
Operating parameters
begin on page 310.



Surface
Treatment

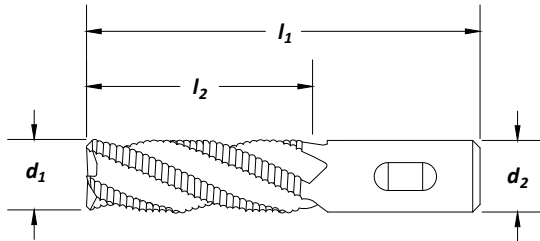**Feature:**

For HIGH VOLUME aluminum roughing.

cutting diameter d_1	decimal equiv.	shank dia d_2 (in)	length of cut l_2 (in)	overall length l_1 (in)	no. of flutes	order number PM-538R			
						Bright 0° R	TiCN 0° R	TiCN .060° R	TiCN .120°
1/2	.5000	.500	1.250	3.250	3	C40003	C40015	—	—
1/2	.5000	.500	2.000	4.000	3	C40004	C40016	—	—
5/8	.6250	.625	1.625	3.750	3	C40005	C40017	—	—
5/8	.6250	.625	2.500	4.625	3	C40006	C40018	—	—
3/4	.7500	.750	1.625	3.875	3	C40007	C40019	C40033	C40035
3/4	.7500	.750	2.250	4.500	3	C40062	C40063	C40064	C40066
3/4	.7500	.750	3.000	5.250	3	C40008	C40020	C40036	C40038
1	1.0000	1.000	2.000	4.500	3	C40009	C40021	C40039	C40041
1	1.0000	1.000	3.000	5.500	3	C40010	C40022	C40042	C40044
1	1.0000	1.000	4.000	6.500	3	C40011	C40023	C40045	C40047
1-1/4	1.2500	1.250	2.000	4.500	3	C40048	C40049	C40050	C40052
1-1/4	1.2500	1.250	3.000	5.500	3	C40012	C40024	C40053	C40055
1-1/4	1.2500	1.250	4.000	6.500	3	C40013	C40025	C40056	C40058
1-1/4	1.2500	1.250	6.000	8.500	3	C40014	C40026	C40059	C40061
1-1/2	1.5000	1.250	2.000	4.500	3	C43244	C43246	—	—
1-1/2	1.5000	1.250	3.000	5.500	3	C43247	C43249	—	—
1-1/2	1.5000	1.250	4.000	6.500	3	C43250	C43252	—	—
1-1/2	1.5000	1.250	6.000	8.500	3	C43253	C43255	—	—

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)	
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium		
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22		22-32			
	Bright													
	TiCN													
☆ = Best Performance ◆ = Acceptable														


Styles: **PM-538L** - Left, Single End

Rougher - Left
PM Plus™, Fine Pitch

Note
Left Hand Spiral.
Left Hand Cut.



Surface
Treatment

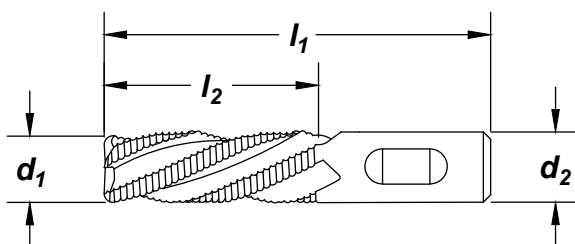

cutting diameter d₁	decimal equiv.	shank dia d₂ (in)	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number PM-538L Bright 0° R
3/4	.7500	.750	1.625	3.875	3	C40400
3/4	.7500	.750	3.000	5.250	3	C40405
1	1.0000	1.000	2.000	4.500	3	C40410
1	1.0000	1.000	3.000	5.500	3	C40415
1	1.0000	1.000	4.000	6.500	3	C40420
1-1/4	1.2500	1.250	2.000	4.500	3	C40425
1-1/4	1.2500	1.250	3.000	5.500	3	C40430
1-1/4	1.2500	1.250	4.000	6.500	3	C40435
1-1/4	1.2500	1.250	6.000	8.500	3	C40440

Powdered Metal

Center Cutting

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
Bright													

☆ = Best Performance ◆ = Acceptable


Note

*Weldon flats available
1/2" and larger.

Solid
CarbideSurface
Treatment

Bright

TiAlN

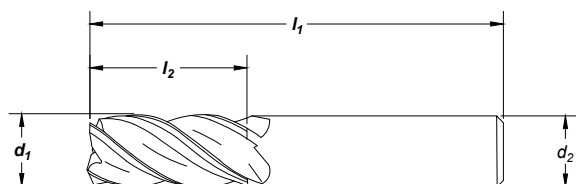

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-V-4R	
fractional	decimal						bright	TiAlN
1/8	.1250	1/8	1/4	1-1/2	4	0.000	C60001	C80001
1/8	.1250	1/8	1/4	1-1/2	4	0.010	C60002	C80002
1/8	.1250	1/8	3/8	1-1/2	4	0.000	C60003	C80003
1/8	.1250	1/8	3/8	1-1/2	4	0.010	C60004	C80004
1/8	.1250	1/8	1/2	1-1/2	4	0.000	C60005	C80005
1/8	.1250	1/8	1/2	1-1/2	4	0.010	C60006	C80006
3/16	.1875	3/16	3/8	2	4	0.000	C60007	C80007
3/16	.1875	3/16	3/8	2	4	0.010	C60008	C80008
3/16	.1875	3/16	7/16	2	4	0.000	C60009	C80009
3/16	.1875	3/16	7/16	2	4	0.010	C60010	C80010
3/16	.1875	3/16	3/4	2-1/2	4	0.000	C60011	C80011
3/16	.1875	3/16	3/4	2-1/2	4	0.010	C60012	C80012
1/4	.2500	1/4	1/2	2	4	0.000	C60013	C80013
1/4	.2500	1/4	1/2	2	4	0.020	C60014	C80014
1/4	.2500	1/4	3/4	2-1/2	4	0.000	C60015	C80015
1/4	.2500	1/4	3/4	2-1/2	4	0.020	C60016	C80016
1/4	.2500	1/4	3/4	2-1/2	4	0.045	C60017	C80017
1/4	.2500	1/4	1-1/8	3	4	0.000	C60018	C80018
1/4	.2500	1/4	1-1/8	3	4	0.020	C60019	C80019
1/4	.2500	1/4	1-1/4	3	4	0.000	C60020	C80020
5/16	.3125	5/16	1/2	2	4	0.000	C60021	C80021
5/16	.3125	5/16	1/2	2	4	0.020	C60022	C80022
5/16	.3125	5/16	13/16	2-1/2	4	0.000	C60023	C80023
5/16	.3125	5/16	13/16	2-1/2	4	0.020	C60024	C80024
5/16	.3125	5/16	1-1/4	3	4	0.000	C60025	C80025
5/16	.3125	5/16	1-1/4	3	4	0.020	C60026	C80026
3/8	.3750	3/8	5/8	2	4	0.000	C60027	C80027
3/8	.3750	3/8	5/8	2	4	0.020	C60028	C80028
3/8	.3750	3/8	7/8	2-1/2	4	0.000	C60029	C80029
3/8	.3750	3/8	7/8	2-1/2	4	0.020	C60030	C80030
3/8	.3750	3/8	1-1/8	3	4	0.000	C60031	C80031
3/8	.3750	3/8	1-1/8	3	4	0.020	C60032	C80032
3/8	.3750	3/8	2	4	4	0.000	C60033	C80033
3/8	.3750	3/8	2	4	4	0.020	C60034	C80034

continued on next page

Style: CEM-V-4R (continued)

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-V-4R	
fractional	decimal						bright	TiAlN
7/16	.4375	7/16	5/8	2-1/2	4	0.000	C60035	C80035
7/16	.4375	7/16	5/8	2-1/2	4	0.020	C60036	C80036
7/16	.4375	7/16	1	3	4	0.000	C60037	C80037
7/16	.4375	7/16	1	3	4	0.020	C60038	C80038
7/16	.4375	7/16	2	4	4	0.000	C60039	C80039
1/2*	.5000	1/2	5/8	2-1/2	4	0.000	C60040	C80040
1/2*	.5000	1/2	5/8	2-1/2	4	0.020	C60041	C80041
1/2*	.5000	1/2	5/8	2-1/2	4	0.030	C60042	C80042
1/2*	.5000	1/2	1	3	4	0.000	C60043	C80043
1/2*	.5000	1/2	1	3	4	0.030	C60044	C80044
1/2*	.5000	1/2	1	3	4	0.060	C60045	C80045
1/2*	.5000	1/2	1	3	4	0.090	C60046	C80046
1/2*	.5000	1/2	1	3	4	0.125	C60047	C80047
1/2*	.5000	1/2	1-1/4	3	4	0.000	C60048	C80048
1/2*	.5000	1/2	1-1/4	3	4	0.020	C60049	C80049
1/2*	.5000	1/2	1-1/4	3	4	0.030	C60050	C80050
1/2*	.5000	1/2	1-1/4	3	4	0.060	C60051	C80051
1/2*	.5000	1/2	1-1/4	3	4	0.090	C60052	C80052
1/2*	.5000	1/2	1-1/4	3	4	0.125	C60053	C80053
1/2*	.5000	1/2	2	4	4	0.000	C60054	C80054
1/2*	.5000	1/2	2	4	4	0.030	C60055	C80055
1/2*	.5000	1/2	2	4	4	0.060	C60056	C80056
1/2*	.5000	1/2	2	4	4	0.090	C60057	C80057
1/2*	.5000	1/2	2	4	4	0.125	C60058	C80058
5/8*	.6250	5/8	3/4	3	4	0.000	C60059	C80059
5/8*	.6250	5/8	3/4	3	4	0.030	C60060	C80060
5/8*	.6250	5/8	1-1/4	3-1/2	4	0.000	C60061	C80061
5/8*	.6250	5/8	1-1/4	3-1/2	4	0.030	C60062	C80062
5/8*	.6250	5/8	1-1/4	3-1/2	4	0.060	C60063	C80063
5/8*	.6250	5/8	1-1/4	3-1/2	4	0.090	C60064	C80064
5/8*	.6250	5/8	1-1/4	3-1/2	4	0.125	C60065	C80065
5/8*	.6250	5/8	2-1/4	5	4	0.000	C60066	C80066
5/8*	.6250	5/8	2-1/4	5	4	0.030	C60067	C80067
5/8*	.6250	5/8	2-1/4	5	4	0.060	C60068	C80068
5/8*	.6250	5/8	2-1/4	5	4	0.090	C60069	C80069
5/8*	.6250	5/8	2-1/4	5	4	0.125	C60070	C80070

* Weldon flats available on 1/2" and over, please specify when ordering and call customer service for pricing.

continued on next page

Carbide

Center Cutting

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness													
TiAlN	☆	◆	☆	◆	☆	☆	◆				☆	☆	◆

☆ = Best Performance ◆ = Acceptable

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-V-4R	
fractional	decimal						bright	TiAIN
3/4*	.7500	3/4	7/8	3	4	0.030	C60071	C80071
3/4*	.7500	3/4	1	3	4	0.000	C60072	C80072
3/4*	.7500	3/4	1	3	4	0.030	C60073	C80073
3/4*	.7500	3/4	1-1/2	4	4	0.000	C60074	C80074
3/4*	.7500	3/4	1-1/2	4	4	0.030	C60075	C80075
3/4*	.7500	3/4	1-1/2	4	4	0.060	C60076	C80076
3/4*	.7500	3/4	1-1/2	4	4	0.090	C60077	C80077
3/4*	.7500	3/4	1-1/2	4	4	0.125	C60078	C80078
3/4*	.7500	3/4	2-1/4	5	4	0.000	C60079	C80079
3/4*	.7500	3/4	2-1/4	5	4	0.030	C60080	C80080
3/4*	.7500	3/4	2-1/4	5	4	0.060	C60081	C80081
3/4*	.7500	3/4	2-1/4	5	4	0.090	C60082	C80082
3/4*	.7500	3/4	2-1/4	5	4	0.125	C60083	C80083
1*	1.0000	1	1-1/2	4	4	0.000	C60084	C80084
1*	1.0000	1	1-1/2	4	4	0.030	C60085	C80085
1*	1.0000	1	1-1/2	4	4	0.060	C60086	C80086
1*	1.0000	1	1-1/2	4	4	0.090	C60087	C80087
1*	1.0000	1	1-1/2	4	4	0.125	C60088	C80088
1*	1.0000	1	2-1/4	5	4	0.000	C60089	C80089
1*	1.0000	1	2-1/4	5	4	0.030	C60090	C80090
1*	1.0000	1	2-1/4	5	4	0.060	C60091	C80091
1*	1.0000	1	2-1/4	5	4	0.090	C60092	C80092
1*	1.0000	1	2-1/4	5	4	0.125	C60093	C80093
1*	1.0000	1	3	6	4	0.000	C60094	C80094
1*	1.0000	1	3	6	4	0.030	C60095	C80095
1*	1.0000	1	3	6	4	0.060	C60096	C80096
1*	1.0000	1	3	6	4	0.090	C60097	C80097
1*	1.0000	1	3	6	4	0.125	C60098	C80098

* Weldon flats available on 1/2" and over, please specify when ordering and call customer service for pricing.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	TiAIN	☆	◆	☆	◆	☆	☆	◆			☆	☆	◆
☆ = Best Performance ◆ = Acceptable													

Styles: CEM-V-4B


Variable Index
Ferrous Materials

Note

*Weldon flats available
1/2" and larger.



Surface
Treatment

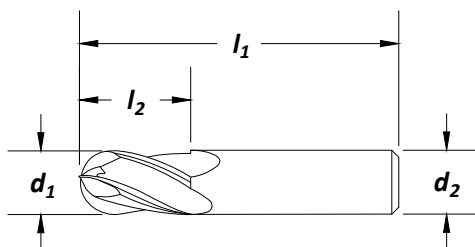

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-V-4B	
fractional	decimal					bright	TiAlN
1/8	.1250	1/8	3/8	1-1/2	4	C60108	C80108
3/16	.1875	3/16	7/16	2	4	C60109	C80109
1/4	.2500	1/4	3/4	2-1/2	4	C60110	C80110
5/16	.3125	5/16	13/16	2-1/2	4	C60111	C80111
3/8	.3750	3/8	7/8	2-1/2	4	C60112	C80112
7/16	.4375	7/16	1	3	4	C60113	C80113
1/2*	.5000	1/2	1	3	4	C60115	C80115
5/8*	.6250	5/8	1-1/4	3-1/2	4	C60116	C80116
3/4*	.7500	3/4	1-1/2	4	4	C60117	C80117
1*	1.0000	1	2-1/4	5	4	C60118	C80118

* Weldon flats available on 1/2" and over, please specify when ordering and call customer service for pricing.

Carbide

Center Cutting


Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32		☆	☆	>45
	TiAlN	☆	◆	☆	◆	☆	☆	◆			☆	☆	◆
☆ = Best Performance ◆ = Acceptable													

Note

For slotting up to 1 x D.

Minimized chatter from unequal flute spacing.

*Weldon flats available 1/2" and larger.

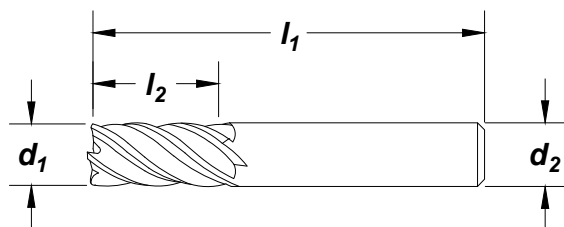Surface
Treatment**Feature**Use one tool for roughing and finishing operations. **Improved Geometry**

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-V2-5R	
fractional	decimal						bright	TiAlN
3/16	.1875	3/16	3/8	2	5	0.000	C60525	C80525
3/16	.1875	3/16	3/8	2	5	0.010	C60526	C80526
3/16	.1875	3/16	7/16	2	5	0.000	C60527	C80527
3/16	.1875	3/16	7/16	2	5	0.010	C60528	C80528
3/16	.1875	3/16	3/4	2-1/2	5	0.000	C60529	C80529
3/16	.1875	3/16	3/4	2-1/2	5	0.010	C60530	C80530
1/4	.2500	1/4	1/2	2	5	0.000	C60531	C80531
1/4	.2500	1/4	1/2	2	5	0.020	C60532	C80532
1/4	.2500	1/4	3/4	2-1/2	5	0.000	C60533	C80533
1/4	.2500	1/4	3/4	2-1/2	5	0.020	C60534	C80534
1/4	.2500	1/4	1-1/8	3	5	0.010	C60535	C80535
1/4	.2500	1/4	1-1/8	3	5	0.020	C60536	C80536
1/4	.2500	1/4	1-1/4	3	5	0.000	C60537	C80537
5/16	.3125	5/16	1/2	2	5	0.000	C60538	C80538
5/16	.3125	5/16	1/2	2	5	0.020	C60539	C80539
5/16	.3125	5/16	13/16	2-1/2	5	0.000	C60540	C80540
5/16	.3125	5/16	13/16	2-1/2	5	0.020	C60541	C80541
5/16	.3125	5/16	1-1/4	3	5	0.000	C60542	C80542
5/16	.3125	5/16	1-1/4	3	5	0.020	C60543	C80543
3/8	.3750	3/8	1/2	2	5	0.030	C60544	C80544
3/8	.3750	3/8	5/8	2	5	0.000	C60545	C80545
3/8	.3750	3/8	5/8	2	5	0.020	C60546	C80546
3/8	.3750	3/8	7/8	2-1/2	5	0.000	C60547	C80547
3/8	.3750	3/8	7/8	2-1/2	5	0.020	C60548	C80548
3/8	.3750	3/8	1-1/8	3	5	0.000	C60549	C80549
3/8	.3750	3/8	1-1/8	3	5	0.020	C60550	C80550
3/8	.3750	3/8	2	4	5	0.000	C60551	C80551
3/8	.3750	3/8	2	4	5	0.020	C60552	C80552
7/16	.4375	7/16	5/8	2-1/2	5	0.000	C60553	C80553
7/16	.4375	7/16	5/8	2-1/2	5	0.020	C60554	C80554
7/16	.4375	7/16	1	3	5	0.000	C60555	C80555
7/16	.4375	7/16	1	3	5	0.020	C60556	C80556
7/16	.4375	7/16	2	4	5	0.000	C60557	C80557
1/2*	.5000	1/2	5/8	2-1/2	5	0.000	C60558	C80558
1/2*	.5000	1/2	5/8	2-1/2	5	0.030	C60559	C80559
1/2*	.5000	1/2	1	3	5	0.000	C60560	C80560
1/2*	.5000	1/2	1	3	5	0.030	C60561	C80561
1/2*	.5000	1/2	1	3	5	0.060	C60562	C80562
1/2*	.5000	1/2	1	3	5	0.090	C60563	C80563
1/2*	.5000	1/2	1	3	5	0.125	C60564	C80564
1/2*	.5000	1/2	1-1/4	3	5	0.000	C60565	C80565
1/2*	.5000	1/2	1-1/4	3	5	0.020	C60566	C80566
1/2*	.5000	1/2	1-1/4	3	5	0.030	C60567	C80567
1/2*	.5000	1/2	1-1/4	3	5	0.060	C60568	C80568
1/2*	.5000	1/2	1-1/4	3	5	0.090	C60569	C80569


* Weldon flats available on 1/2" and over, please specify when ordering and call customer service for pricing.

continued on next page

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-V2-5R	
fractional	decimal						bright	TiAlN
1/2*	.5000	1/2	1-1/4	3	5	0.125	C60570	C80570
1/2*	.5000	1/2	2	4	5	0.000	C60571	C80571
1/2*	.5000	1/2	2	4	5	0.030	C60572	C80572
1/2*	.5000	1/2	2	4	5	0.060	C60573	C80573
1/2*	.5000	1/2	2	4	5	0.090	C60574	C80574
1/2*	.5000	1/2	2	4	5	0.125	C60575	C80575
5/8*	.6250	5/8	3/4	3	5	0.000	C60576	C80576
5/8*	.6250	5/8	3/4	3	5	0.030	C60577	C80577
5/8*	.6250	5/8	1-1/4	3-1/2	5	0.000	C60578	C80578
5/8*	.6250	5/8	1-1/4	3-1/2	5	0.030	C60579	C80579
5/8*	.6250	5/8	1-1/4	3-1/2	5	0.060	C60580	C80580
5/8*	.6250	5/8	1-1/4	3-1/2	5	0.090	C60581	C80581
5/8*	.6250	5/8	1-1/4	3-1/2	5	0.125	C60582	C80582
5/8*	.6250	5/8	2-1/4	5	5	0.000	C60583	C80583
5/8*	.6250	5/8	2-1/4	5	5	0.030	C60584	C80584
5/8*	.6250	5/8	2-1/4	5	5	0.060	C60585	C80585
5/8*	.6250	5/8	2-1/4	5	5	0.090	C60586	C80586
5/8*	.6250	5/8	2-1/4	5	5	0.125	C60587	C80587
3/4*	.7500	3/4	1	3	5	0.000	C60588	C80588
3/4*	.7500	3/4	1	3	5	0.015	C60511	C80511
3/4*	.7500	3/4	1	3	5	0.030	C60589	C80589
3/4*	.7500	3/4	1-1/2	4	5	0.000	C60590	C80590
3/4*	.7500	3/4	1-1/2	4	5	0.015	C60512	C80512
3/4*	.7500	3/4	1-1/2	4	5	0.030	C60591	C80591
3/4*	.7500	3/4	1-1/2	4	5	0.060	C60592	C80592
3/4*	.7500	3/4	1-1/2	4	5	0.090	C60593	C80593
3/4*	.7500	3/4	1-1/2	4	5	0.125	C60594	C80594
3/4*	.7500	3/4	2-1/4	5	5	0.000	C60595	C80595
3/4*	.7500	3/4	2-1/4	5	5	0.015	C60513	C80513
3/4*	.7500	3/4	2-1/4	5	5	0.030	C60596	C80596
3/4*	.7500	3/4	2-1/4	5	5	0.060	C60597	C80597
3/4*	.7500	3/4	2-1/4	5	5	0.090	C60598	C80598
3/4*	.7500	3/4	2-1/4	5	5	0.125	C60599	C80599
1*	1.0000	1	1-1/2	4	5	0.000	C60600	C80600
1*	1.0000	1	1-1/2	4	5	0.015	C60514	C80514
1*	1.0000	1	1-1/2	4	5	0.030	C60601	C80601
1*	1.0000	1	1-1/2	4	5	0.060	C60602	C80602
1*	1.0000	1	1-1/2	4	5	0.090	C60603	C80603
1*	1.0000	1	1-1/2	4	5	0.125	C60604	C80604
1*	1.0000	1	2-1/4	5	5	0.000	C60605	C80605
1*	1.0000	1	2-1/4	5	5	0.015	C60515	C80515
1*	1.0000	1	2-1/4	5	5	0.030	C60606	C80606
1*	1.0000	1	2-1/4	5	5	0.060	C60607	C80607
1*	1.0000	1	2-1/4	5	5	0.090	C60608	C80608
1*	1.0000	1	2-1/4	5	5	0.125	C60609	C80609
1*	1.0000	1	3	6	5	0.000	C60610	C80610
1*	1.0000	1	3	6	5	0.015	C60516	C80516
1*	1.0000	1	3	6	5	0.030	C60611	C80611
1*	1.0000	1	3	6	5	0.060	C60612	C80612
1*	1.0000	1	3	6	5	0.090	C60613	C80613
1*	1.0000	1	3	6	5	0.125	C60614	C80614

* Weldon flats available on 1/2" and over, please specify when ordering and call customer service for pricing.

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
TiAlN		☆	◆	☆	◆	☆	☆	◆			☆	☆	◆
☆ = Best Performance ◆ = Acceptable													

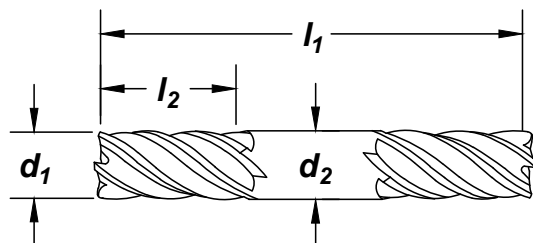Surface
Treatment

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-HPDE-5	
fractional	decimal						bright	TiAlN
1/8	.1250	1/8	1/4	1-1/2	5	0.000	C60100	C80100
3/16	.1875	3/16	5/16	2	5	0.000	C60101	C80101
1/4	.2500	1/4	3/8	2-1/2	5	0.000	C60102	C80102
5/16	.3125	5/16	7/16	2-1/2	5	0.000	C60103	C80103
3/8	.3750	3/8	1/2	2-1/2	5	0.000	C60104	C80104
7/16	.4375	7/16	9/16	3	5	0.000	C60105	C80105
1/2*	.5000	1/2	5/8	3	5	0.000	C60106	C80106


*Weldon shank; all others plain shank

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
Bright	★	★	★	★	★	★					★	☆	
TiAlN	☆	☆	☆	☆	☆	☆	★						

☆ = Best Performance

★ = Acceptable

Styles: CEM-EMS-3
Steel Materials

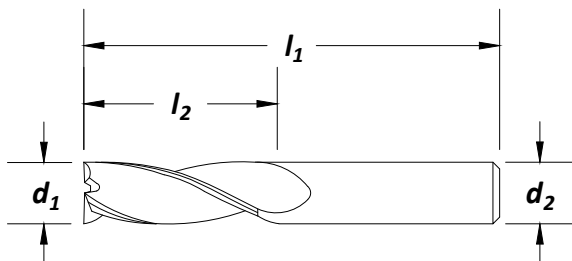
Surface Treatment
 **Bright**
 **TiAlN**


cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-EMS-3	
fractional	decimal						bright	TiAlN
1/8	.1250	1/8	1/4	1-1/2	3	0.010	C60365	C80365
1/8	.1250	1/8	1/2	1-1/2	3	0.010	C60366	C80366
5/32	.1562	3/16	5/16	1-1/2	3	0.010	C60367	C80367
5/32	.1562	3/16	9/16	2	3	0.010	C60368	C80368
3/16	.1875	3/16	5/16	2	3	0.010	C60369	C80369
3/16	.1875	3/16	5/8	2	3	0.010	C60370	C80370
7/32	.2188	1/4	1/2	2	3	0.020	C60371	C80371
7/32	.2188	1/4	3/4	2-1/2	3	0.020	C60372	C80372
1/4	.2500	1/4	3/8	2	3	0.020	C60373	C80373
1/4	.2500	1/4	3/4	2-1/2	3	0.020	C60374	C80374
9/32	.2812	5/16	7/16	2	3	0.020	C60375	C80375
9/32	.2812	5/16	13/16	2-1/2	3	0.020	C60376	C80376
5/16	.3125	5/16	7/16	2	3	0.020	C60377	C80377
5/16	.3125	5/16	13/16	2-1/2	3	0.020	C60378	C80378
11/32	.3438	3/8	1/2	2	3	0.020	C60379	C80379
11/32	.3438	3/8	7/8	2-1/2	3	0.020	C60380	C80380
3/8	.3750	3/8	1/2	2	3	0.020	C60381	C80381
3/8	.3750	3/8	7/8	2-1/2	3	0.020	C60382	C80382
13/32	.4062	7/16	9/16	2-1/2	3	0.020	C60383	C80383
13/32	.4062	7/16	1	2-1/2	3	0.020	C60384	C80384
7/16	.4375	7/16	9/16	2-1/2	3	0.020	C60385	C80385
7/16	.4375	7/16	1	2-1/2	3	0.020	C60386	C80386
15/32*	.4688	1/2	5/8	2-1/2	3	0.020	C60387	C80387
15/32*	.4688	1/2	1-1/4	3	3	0.020	C60388	C80388
1/2*	.5000	1/2	5/8	2-1/2	3	0.030	C60389	C80389
1/2*	.5000	1/2	1-1/4	3	3	0.030	C60390	C80390
5/8*	.6250	5/8	3/4	3	3	0.030	C60391	C80391
5/8*	.6250	5/8	1-5/8	4	3	0.030	C60392	C80392
3/4*	.7500	3/4	7/8	3	3	0.030	C60393	C80393
3/4*	.7500	3/4	1-5/8	4	3	0.030	C60394	C80394
1*	1.0000	1	1-1/8	3	3	0.030	C60395	C80395
1*	1.0000	1	2	4	3	0.030	C60396	C80396

*Weldon shank; all others plain shank

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
TiAlN		☆	◆	☆	◆	☆	☆	◆					◆

☆ = Best Performance ◆ = Acceptable

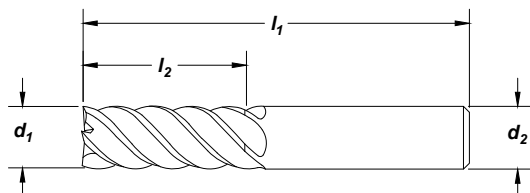
Surface
Treatment

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-EMS-5	
fractional	decimal						bright	TiAlN
1/8	.1250	1/8	1/4	1-1/2	5	0.000	C60417	C80417
1/8	.1250	1/8	1/2	1-1/2	5	0.000	C60418	C80418
1/8	.1250	1/8	1/2	2	5	0.000	C60419	C80419
5/32	.1562	3/16	5/16	2	5	0.000	C60420	C80420
5/32	.1562	3/16	9/16	2	5	0.000	C60421	C80421
3/16	.1875	3/16	5/16	2	5	0.000	C60422	C80422
3/16	.1875	3/16	9/16	2	5	0.000	C60423	C80423
7/32	.2188	1/4	3/8	2	5	0.000	C60424	C80424
7/32	.2188	1/4	3/4	2-1/2	5	0.000	C60425	C80425
1/4	.2500	1/4	3/8	2	5	0.000	C60426	C80426
1/4	.2500	1/4	3/4	2-1/2	5	0.000	C60427	C80427
1/4	.2500	1/4	1-1/4	4	5	0.000	C60428	C80428
9/32	.2812	5/16	7/16	2	5	0.000	C60429	C80429
9/32	.2812	5/16	13/16	2-1/2	5	0.000	C60430	C80430
5/16	.3125	5/16	7/16	2	5	0.000	C60431	C80431
5/16	.3125	5/16	13/16	2-1/2	5	0.000	C60432	C80432
5/16	.3125	5/16	1-1/4	4	5	0.000	C60433	C80433
3/8	.3750	3/8	1/2	2	5	0.000	C60434	C80434
3/8	.3750	3/8	7/8	2-1/2	5	0.000	C60435	C80435
3/8	.3750	3/8	1-1/2	4	5	0.000	C60436	C80436
7/16	.4375	7/16	9/16	2-1/2	5	0.000	C60437	C80437
7/16	.4375	7/16	1	2-1/2	5	0.000	C60438	C80438
7/16	.4375	7/16	2	4	5	0.000	C60439	C80439
1/2*	.5000	1/2	5/8	2-1/2	5	0.000	C60440	C80440
1/2*	.5000	1/2	1-1/4	3	5	0.000	C60441	C80441
1/2*	.5000	1/2	2	4	5	0.000	C60442	C80442
9/16*	.5625	9/16	1-1/2	3 1/2	5	0.000	C60443	C80443
5/8*	.6250	5/8	3/4	3	5	0.000	C60444	C80444
5/8*	.6250	5/8	1-5/8	4	5	0.000	C60445	C80445
5/8*	.6250	5/8	2-1/2	5	5	0.000	C60446	C80446
3/4*	.7500	3/4	7/8	3	5	0.000	C60447	C80447
3/4*	.7500	3/4	1-5/8	4	5	0.000	C60448	C80448
3/4*	.7500	3/4	3 1/4	6	5	0.000	C60449	C80449
7/8*	.8750	7/8	2	4	5	0.000	C60450	C80450
1*	1.0000	1	1-1/8	3	5	0.000	C60451	C80451
1*	1.0000	1	2	4	5	0.000	C60452	C80452
1*	1.0000	1	3 1/4	6	5	0.000	C60453	C80453

*Weldon shank; all others plain shank


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
TiAlN	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆	☆
☆ = Best Performance ☆ = Acceptable													

Style: CEM-AM2
Aluminum Materials

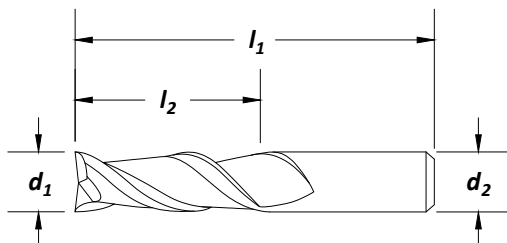Surface Treatment
Bright
TiCN


cutting diameter		shank diameter	length of cut	overall length	no. of flutes	order number	
fractional	decimal	d ₂	l ₂ (in)	l ₁ (in)		CEM-AM2	
						bright	TiCN
1/8	.1250	1/8	1/4	1-1/2	2	C60477	C70477
1/8	.1250	1/8	3/8	1-1/2	2	C60478	C70478
3/16	.1875	3/16	5/16	2	2	C60479	C70479
3/16	.1875	3/16	9/16	2	2	C60480	C70480
1/4	.2500	1/4	3/8	2-1/2	2	C60481	C70481
1/4	.2500	1/4	3/4	2-1/2	2	C60482	C70482
1/4	.2500	1/4	1-1/4	3	2	C60483	C70483
5/16	.3125	5/16	7/16	2-1/2	2	C60484	C70484
5/16	.3125	5/16	13/16	2-1/2	2	C60485	C70485
5/16	.3125	5/16	1-1/4	3-1/2	2	C60486	C70486
5/16	.3125	5/16	2-1/8	4	2	C60487	C70487
3/8	.3750	3/8	1/2	2-1/2	2	C60488	C70488
3/8	.3750	3/8	1	2-1/2	2	C60489	C70489
3/8	.3750	3/8	1-1/2	4	2	C60490	C70490
3/8	.3750	3/8	2-1/2	6	2	C60491	C70491
7/16	.4375	7/16	9/16	2-1/2	2	C60492	C70492
7/16	.4375	7/16	1	2-1/2	2	C60493	C70493
7/16	.4375	7/16	2	4	2	C60494	C70494
1/2	.5000	1/2	5/8	3	2	C60495	C70495
1/2	.5000	1/2	1-1/4	3	2	C60496	C70496
1/2	.5000	1/2	2	4	2	C60497	C70497
1/2	.5000	1/2	3-1/8	6	2	C60498	C70498
5/8	.6250	5/8	3/4	3-1/2	2	C60499	C70499
5/8	.6250	5/8	1-5/8	4	2	C60500	C70500
5/8	.6250	5/8	2-1/2	5	2	C60501	C70501
5/8	.6250	5/8	3-3/4	6	2	C60502	C70502
3/4	.7500	3/4	1	4	2	C60503	C70503
3/4	.7500	3/4	1-5/8	4	2	C60504	C70504
3/4	.7500	3/4	3-1/4	6	2	C60505	C70505
3/4	.7500	3/4	4	6-1/2	2	C60506	C70506
1	1.0000	1	1-1/4	5	2	C60507	C70507
1	1.0000	1	2	5	2	C60508	C70508
1	1.0000	1	3-1/4	6	2	C60509	C70509
1	1.0000	1	4-1/8	7	2	C60510	C70510

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	TiCN									☆			
☆ = Best Performance ♦ = Acceptable													

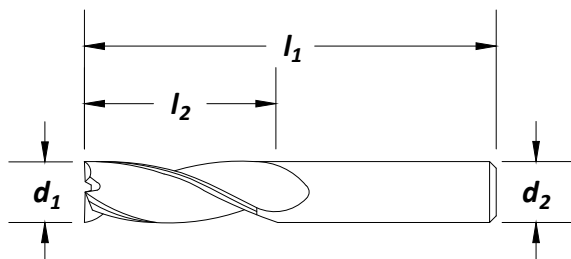Surface
Treatment

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-AM3	
fractional	decimal					bright	ZrN
1/8	.1250	1/8	1/4	1-1/2	3	C60616	C72340
1/8	.1250	1/8	3/8	1-1/2	3	C60617	C72341
3/16	.1875	3/16	5/16	2	3	C60618	C72342
3/16	.1875	3/16	9/16	2	3	C60619	C72343
1/4	.2500	1/4	3/8	2	3	C60620	C72344
1/4	.2500	1/4	3/4	2-1/2	3	C60621	C72345
1/4	.2500	1/4	1-1/4	3	3	C60622	C72346
5/16	.3125	5/16	7/16	2	3	C60623	C72347
5/16	.3125	5/16	5/8	2-1/2	3	C60624	C72348
5/16	.3125	5/16	1-1/4	3-1/2	3	C60625	C72349
5/16	.3125	5/16	2-1/8	4	3	C60626	C72350
3/8	.3750	3/8	1/2	2	3	C60627	C72351
3/8	.3750	3/8	1	2-1/2	3	C60628	C72352
3/8	.3750	3/8	1-1/2	3-1/2	3	C60629	C72353
3/8	.3750	3/8	2-1/2	6	3	C60630	C72354
7/16	.4375	7/16	9/16	2-1/2	3	C60631	C72355
7/16	.4375	7/16	1-1/4	2-1/2	3	C60632	C72356
7/16	.4375	7/16	2	4	3	C60633	C72357
1/2	.5000	1/2	5/8	2-1/2	3	C60634	C72358
1/2	.5000	1/2	1-1/4	3	3	C60635	C72359
1/2	.5000	1/2	2	4	3	C60636	C72360
1/2	.5000	1/2	3-1/8	6	3	C60637	C72361
5/8	.6250	5/8	3/4	3	3	C60638	C72362
5/8	.6250	5/8	1-5/8	4	3	C60639	C72363
5/8	.6250	5/8	2-1/2	5	3	C60640	C72364
5/8	.6250	5/8	3-3/4	6	3	C60641	C72365
3/4	.7500	3/4	1	3	3	C60642	C72366
3/4	.7500	3/4	1-5/8	4	3	C60643	C72367
3/4	.7500	3/4	3-1/4	6	3	C60644	C72368
1	1.0000	1	1-1/2	4	3	C60645	C72369
1	1.0000	1	2	5	3	C60646	C72370
1	1.0000	1	3-1/2	6	3	C60647	C72371

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
	Bright										✦		
	ZrN										☆		

☆ = Best Performance ✦ = Acceptable

Note
Has a Weldon shank


Solid
Carbide



Surface
Treatment

Bright

TiAIN

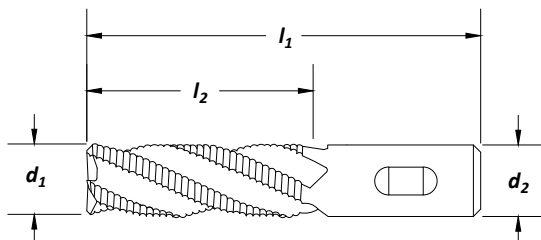

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-RS	
fractional	decimal						bright	TiAIN
1/4	.2500	1/4	3/8	2	4	0.000	C60148	C80148
1/4	.2500	1/4	3/4	2-1/2	4	0.000	C60149	C80149
3/8	.3750	3/8	1/2	2	4	0.000	C60150	C80150
3/8	.3750	3/8	7/8	2-1/2	4	0.000	C60151	C80151
1/2	.5000	1/2	5/8	2-1/2	4	0.000	C60152	C80152
1/2	.5000	1/2	1	3	4	0.000	C60153	C80153
5/8	.6250	5/8	3/4	3	4	0.000	C60154	C80154
5/8	.6250	5/8	1-1/4	3 1/2	4	0.000	C60155	C80155
3/4	.7500	3/4	7/8	3 1/2	4	0.000	C60156	C80156
3/4	.7500	3/4	1-1/2	4	4	0.000	C60157	C80157
1	1.0000	1	1	3 1/2	4	0.000	C60158	C80158
1	1.0000	1	1-1/2	4	4	0.000	C60159	C80159

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	TiAIN	◆		◆		☆	☆	◆					☆
☆ = Best Performance ◆ = Acceptable													

Note
Has a Weldon shank

Solid Carbide

3 Flute CC


Helix 38°

Square End

Surface Treatment

Bright

TiCN

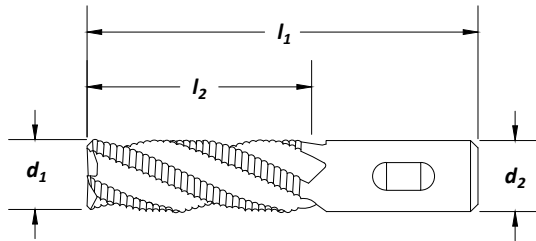

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-RA	
fractional	decimal					bright	TiCN
1/4	.2500	1/4	3/8	2	3	C60455	C70455
1/4	.2500	1/4	3/4	2-1/2	3	C60456	C70456
3/8	.3750	3/8	1/2	2	3	C60457	C70457
3/8	.3750	3/8	7/8	2-1/2	3	C60458	C70458
1/2	.5000	1/2	5/8	2-1/2	3	C60459	C70459
1/2	.5000	1/2	1	3	3	C60460	C70460
1/2	.5000	1/2	2	4 1/2	3	C60461	C70461
5/8	.6250	5/8	3/4	3	3	C60462	C70462
5/8	.6250	5/8	1-1/4	3 1/2	3	C60463	C70463
5/8	.6250	5/8	2 1/4	5	3	C60464	C70464
3/4	.7500	3/4	1	3 1/2	3	C60465	C70465
3/4	.7500	3/4	1-1/2	4	3	C60466	C70466
3/4	.7500	3/4	2 1/4	5	3	C60467	C70467
1	1.0000	1	1 1/8	3 1/2	3	C60468	C70468
1	1.0000	1	1-1/2	4	3	C60469	C70469
1	1.0000	1	2 1/4	5	3	C60470	C70470

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	TiCN									☆			
☆ = Best Performance ◆ = Acceptable													

Style: CEM-DE2
General Purpose

Solid Carbide

2 Flute CC



Helix 35°

Square End

Surface Treatment

Bright

TiAlN

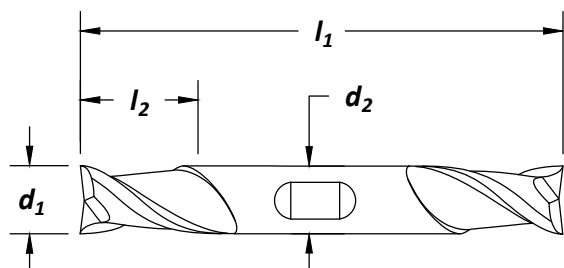

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-DE2	
fractional	decimal					bright	TiAlN
1/16	.0625	1/8	1/8	1-1/2	2	C60169	C80169
3/32	.0938	1/8	3/16	1-1/2	2	C60170	C80170
1/8	.1250	1/8	1/4	1-1/2	2	C60171	C80171
1/8*	.1250	3/8	3/8	3	2	C60172	C80172
5/32	.1562	3/16	5/16	2	2	C60173	C80173
5/32*	.1562	3/8	7/16	3	2	C60174	C80174
3/16	.1875	3/16	3/8	2	2	C60175	C80175
3/16*	.1875	3/8	1/2	3	2	C60176	C80176
7/32*	.2188	3/8	9/16	3 1/2	2	C60177	C80177
1/4	.2500	1/4	1/2	2-1/2	2	C60178	C80178
1/4*	.2500	3/8	5/8	3 1/2	2	C60179	C80179
9/32*	.2812	3/8	11/16	3 1/2	2	C60180	C80180
5/16*	.3125	3/8	3/4	3 1/2	2	C60181	C80181
3/8	.3750	3/8	9/16	3	2	C60182	C80182
3/8*	.3750	3/8	3/4	3 1/2	2	C60183	C80183
7/16*	.4375	1/2	7/8	4	2	C60184	C80184
1/2	.5000	1/2	5/8	3	2	C60185	C80185
1/2*	.5000	1/2	1	4	2	C60186	C80186

*Weldon shank; all others plain shank

Carbide

Center Cutting


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	◆		◆					◆	◆	☆			
TiAlN	☆		☆		◆	◆		☆	☆				

☆ = Best Performance ◆ = Acceptable

Solid
CarbideSurface
Treatment

Bright

TiAIN

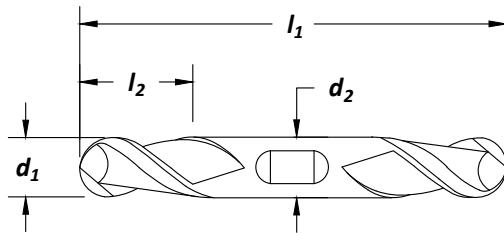

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-DE2B	
fractional	decimal					bright	TiAIN
1/16	.0625	1/8	1/8	1-1/2	2	C60205	C80205
3/32	.0938	1/8	3/16	1-1/2	2	C60206	C80206
1/8*	.1250	3/8	3/8	3	2	C60207	C80207
5/32*	.1562	3/8	7/16	3	2	C60208	C80208
3/16*	.1875	3/8	1/2	3	2	C60209	C80209
7/32*	.2188	3/8	9/16	3 1/2	2	C60210	C80210
1/4*	.2500	3/8	5/8	3 1/2	2	C60211	C80211
9/32*	.2812	3/8	11/16	3 1/2	2	C60212	C80212
5/16*	.3125	3/8	3/4	3 1/2	2	C60213	C80213
3/8*	.3750	3/8	3/4	3 1/2	2	C60214	C80214
7/16*	.4375	1/2	7/8	4	2	C60215	C80215
1/2*	.5000	1/2	1	4	2	C60216	C80216

*Weldon shank; all others plain shank

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
Bright	◆		◆					◆	◆	☆			
TiAIN	☆		☆		◆	◆		☆	☆				
☆ = Best Performance ◆ = Acceptable													


Style: CEM-DE4
General Purpose

Solid Carbide


Surface Treatment

Bright

TiAlN

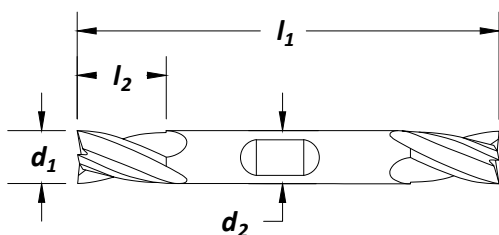

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-DE4	
fractional	decimal					bright	TiAlN
1/16	.0625	1/8	1/8	1-1/2	4	C60269	C80269
3/32	.0938	1/8	3/16	1-1/2	4	C60270	C80270
1/8	.1250	1/8	1/4	1-1/2	4	C60271	C80271
1/8	.1250	3/16	1/4	2	4	C60272	C80272
1/8*	.1250	3/8	7/16	3	4	C60273	C80273
5/32	.1562	3/16	5/16	2	4	C60274	C80274
5/32*	.1562	3/8	7/16	3	4	C60275	C80275
3/16	.1875	3/16	3/8	2	4	C60276	C80276
3/16*	.1875	3/8	1/2	3	4	C60277	C80277
7/32*	.2188	3/8	9/16	3 1/2	4	C60278	C80278
1/4	.2500	1/4	1/2	2-1/2	4	C60279	C80279
1/4*	.2500	3/8	5/8	3 1/2	4	C60280	C80280
9/32*	.2812	3/8	11/16	3 1/2	4	C60281	C80281
5/16	.3125	5/16	1/2	2-1/2	4	C60282	C80282
5/16*	.3125	3/8	3/4	3 1/2	4	C60283	C80283
3/8	.3750	3/8	9/16	3	4	C60284	C80284
3/8*	.3750	3/8	3/4	3 1/2	4	C60285	C80285
7/16*	.4375	1/2	7/8	4	4	C60286	C80286
1/2	.5000	1/2	5/8	3	4	C60287	C80287
1/2*	.5000	1/2	1	4	4	C60288	C80288

*Weldon shank; all others plain shank

Carbide

Center Cutting

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Hardness	13-38	>38	16-38	> 38	300 Series	400 series	PH	18-22	22-32				
Bright	★		★					★	★	☆			
TiAlN	☆		☆		★	★		☆	☆				★

☆ = Best Performance

★ = Acceptable

Solid
Carbide

4 Flute CC



Helix 30°

Ball End

Surface
Treatment

Bright

TiAlN

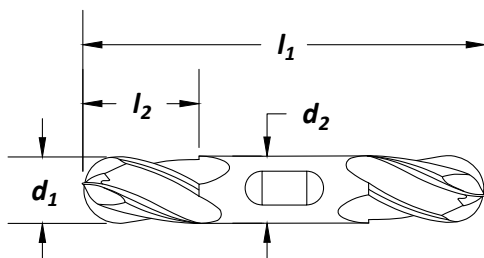

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-DE4B	
fractional	decimal					bright	TiAlN
1/16	.0625	1/8	1/8	1-1/2	4	C60305	C80305
3/32	.0938	1/8	3/16	1-1/2	4	C60306	C80306
1/8*	.1250	3/8	3/8	3	4	C60307	C80307
5/32*	.1562	3/8	7/16	3	4	C60308	C80308
3/16*	.1875	3/8	1/2	3	4	C60309	C80309
7/32*	.2188	3/8	9/16	3 1/2	4	C60310	C80310
1/4*	.2500	3/8	5/8	3 1/2	4	C60311	C80311
9/32*	.2812	3/8	11/16	3 1/2	4	C60312	C80312
5/16*	.3125	3/8	3/4	3 1/2	4	C60313	C80313
3/8*	.3750	3/8	3/4	3 1/2	4	C60314	C80314
7/16*	.4375	1/2	7/8	4	4	C60315	C80315
1/2*	.5000	1/2	1	4	4	C60316	C80316

*Weldon shank; all others plain shank

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
Bright	◆		◆					◆	◆	☆			
TiAlN	☆		☆		◆	◆		☆	☆				

☆ = Best Performance

◆ = Acceptable

Note


General purpose applications.

30° right hand spiral-right hand cut

Diameter tolerance: ± 0.0005 "



Surface
Treatment

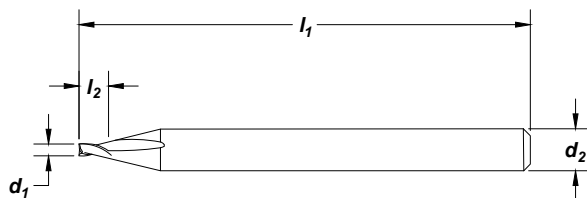

order number

cutting diameter d₁	shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	description	CMCE-2 Bright	CMCE-2AL AlCrN
0.005	1/8	0.0150	1-1/2	0.005 x 1/8 x 1-1/2	C76001	—
0.006	1/8	0.0180	1-1/2	0.006 x 1/8 x 1-1/2	C76002	—
0.007	1/8	0.0210	1-1/2	0.007 x 1/8 x 1-1/2	C76003	—
0.008	1/8	0.0240	1-1/2	0.008 x 1/8 x 1-1/2	C76004	—
0.009	1/8	0.0270	1-1/2	0.009 x 1/8 x 1-1/2	C76005	—
0.010	1/8	0.0300	1-1/2	0.010 x 1/8 x 1-1/2	C76006	—
0.011	1/8	0.0330	1-1/2	0.011 x 1/8 x 1-1/2	C76007	—
0.012	1/8	0.0360	1-1/2	0.012 x 1/8 x 1-1/2	C76008	—
0.013	1/8	0.0390	1-1/2	0.013 x 1/8 x 1-1/2	C76009	—
0.014	1/8	0.0420	1-1/2	0.014 x 1/8 x 1-1/2	C76010	—
0.015	1/8	0.0450	1-1/2	0.015 x 1/8 x 1-1/2	C76011	—
0.0156	1/8	0.0468	1-1/2	0.0156 x 1/8 x 1-1/2	C76012	—
0.018	1/8	0.0540	1-1/2	0.018 x 1/8 x 1-1/2	C76013	—
0.020	1/8	0.0600	1-1/2	0.020 x 1/8 x 1-1/2	C76014	—
0.023	1/8	0.0690	1-1/2	0.023 x 1/8 x 1-1/2	C76015	—
0.024	1/8	0.0720	1-1/2	0.024 x 1/8 x 1-1/2	C76016	—
0.025	1/8	0.0750	1-1/2	0.025 x 1/8 x 1-1/2	C76017	—
0.026	1/8	0.0780	1-1/2	0.026 x 1/8 x 1-1/2	C76018	—
0.029	1/8	0.0870	1-1/2	0.029 x 1/8 x 1-1/2	C76019	—
0.030	1/8	0.0900	1-1/2	0.030 x 1/8 x 1-1/2	C76020	—
0.031	1/8	0.0930	1-1/2	0.031 x 1/8 x 1-1/2	C76021	C76200
0.033	1/8	0.0990	1-1/2	0.033 x 1/8 x 1-1/2	C76022	C76201
0.035	1/8	0.1050	1-1/2	0.035 x 1/8 x 1-1/2	C76023	C76202
0.040	1/8	0.1200	1-1/2	0.040 x 1/8 x 1-1/2	C76024	C76203
0.045	1/8	0.1350	1-1/2	0.045 x 1/8 x 1-1/2	C76025	C76204
0.047	1/8	0.1410	1-1/2	0.047 x 1/8 x 1-1/2	C76026	C76205
0.050	1/8	0.1500	1-1/2	0.050 x 1/8 x 1-1/2	C76027	C76206
0.055	1/8	0.1650	1-1/2	0.055 x 1/8 x 1-1/2	C76028	C76207
0.060	1/8	0.1800	1-1/2	0.060 x 1/8 x 1-1/2	C76029	C76208
0.062	1/8	0.1875	1-1/2	0.062 x 1/8 x 1-1/2	C76030	C76209
0.064	1/8	0.1920	1-1/2	0.064 x 1/8 x 1-1/2	C76031	C76210
0.065	1/8	0.1950	1-1/2	0.065 x 1/8 x 1-1/2	C76032	C76211
0.070	1/8	0.2100	1-1/2	0.070 x 1/8 x 1-1/2	C76033	C76212

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright	★	★	★	★	★	★	★	★	★	★	★	★
	AlCrN	★	★	★	★	★	★	★	★	★	★	★	★

★ = Best Performance ◆ = Acceptable

cutting diameter d₁	shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	description	order number	
					CMCE-2 Bright	CMCE-2AL AlCrN
0.075	1/8	0.2250	1-1/2	0.075 x 1/8 x 1-1/2	C76034	C76213
0.078	1/8	0.2243	1-1/2	0.078 x 1/8 x 1-1/2	C76035	C76214
0.080	1/8	0.2400	1-1/2	0.080 x 1/8 x 1-1/2	C76036	C76215
0.085	1/8	0.2550	1-1/2	0.085 x 1/8 x 1-1/2	C76037	C76216
0.090	1/8	0.2700	1-1/2	0.090 x 1/8 x 1-1/2	C76038	C76217
0.093	1/8	0.2814	1-1/2	0.093 x 1/8 x 1-1/2	C76039	C76218
0.095	1/8	0.2850	1-1/2	0.095 x 1/8 x 1-1/2	C76040	C76219
0.100	1/8	0.3000	1-1/2	0.100 x 1/8 x 1-1/2	C76041	C76220
0.103	1/8	0.3090	1-1/2	0.103 x 1/8 x 1-1/2	C76042	C76221
0.120	1/8	0.3600	1-1/2	0.120 x 1/8 x 1-1/2	C76043	C76222

Miniature
MetricStyle: **CMCE-2 / CMCE-2AL**

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	description	order number	
(mm)	(in)					CMCE-2 Bright	CMCE-2AL AlCrN
.5mm	0.0197	1/8	0.0591	1-1/2	.5mm x 1/8 x 1-1/2	C76044	—
1.0mm	0.0394	1/8	0.1182	1-1/2	1.0mm x 1/8 x 1-1/2	C76045	C76223
1.25mm	0.0492	1/8	0.1476	1-1/2	1.25mm x 1/8 x 1-1/2	C76046	C76224
1.5mm	0.0591	1/8	0.1773	1-1/2	1.5mm x 1/8 x 1-1/2	C76047	C76225
1.6mm	0.0630	1/8	0.1890	1-1/2	1.6mm x 1/8 x 1-1/2	C76048	C76226
1.8mm	0.0709	1/8	0.2127	1-1/2	1.8mm x 1/8 x 1-1/2	C76049	C76227
2.0mm	0.0787	1/8	0.2361	1-1/2	2.0mm x 1/8 x 1-1/2	C76050	C76228
2.2mm	0.0866	1/8	0.2598	1-1/2	2.2mm x 1/8 x 1-1/2	C76051	C76229
2.5mm	0.0984	1/8	0.2952	1-1/2	2.5mm x 1/8 x 1-1/2	C76052	C76230
2.8mm	0.1102	1/8	0.3306	1-1/2	2.8mm x 1/8 x 1-1/2	C76053	C76231
3.0mm	0.1181	1/8	0.3543	1-1/2	3.0mm x 1/8 x 1-1/2	C76054	C76232
3.5mm	0.1378	3/16	0.4134	2	3.5mm x 3/16 x 2	C76055	C76233
4.5mm	0.1772	3/16	0.5316	2	4.5mm x 3/16 x 2	C76056	C76234

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
	Bright	★		★	★	★		★	★				
	AlCrN	☆	★	☆	★	☆	★	☆	☆	☆	★	★	★

☆ = Best Performance ★ = Acceptable

Style: CEM-SE2
General Purpose

Solid Carbide

2 Flute CC

Helix 35°


Radius End

Square End

Surface Treatment

Bright

TiAlN

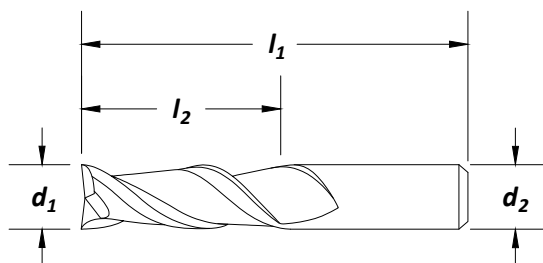

cutting diameter		shank diameter d ₂	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	corner radius	order number	
d ₁ fractional	d ₁ decimal						CEM-SE2	
							bright	TiAlN
1/32	.0312	1/8	1/8	1-1/2	2	0.000	C61001	C81001
3/64	.0469	1/8	1/8	1-1/2	2	0.000	C61002	C81002
1/16	.0625	1/8	1/8	1-1/2	2	0.000	C61003	C81003
1/16	.0625	1/8	3/16	1-1/2	2	0.000	C61004	C81004
5/64	.0781	1/8	3/16	1-1/2	2	0.000	C61005	C81005
3/32	.0938	1/8	3/16	1-1/2	2	0.000	C61006	C81006
3/32	.0938	1/8	3/8	1-1/2	2	0.000	C61007	C81007
7/64	.1094	1/8	3/8	1-1/2	2	0.000	C61008	C81008
1/8	.1250	1/8	1/4	1-1/2	2	0.000	C61009	C81009
1/8	.1250	1/8	1/2	1-1/2	2	0.000	C61010	C81010
1/8	.1250	1/8	1/2	1-1/2	2	0.010	C61011	C81011
1/8	.1250	1/8	3/4	2-1/4	2	0.000	C61012	C81012
1/8	.1250	1/8	1	3	2	0.000	C61013	C81013
9/64	.1406	3/16	9/16	2	2	0.000	C61014	C81014
5/32	.1562	3/16	9/16	2	2	0.000	C61015	C81015
11/64	.1719	3/16	5/8	2	2	0.000	C61016	C81016
3/16	.1875	3/16	5/16	2	2	0.000	C61017	C81017
3/16	.1875	3/16	5/8	2	2	0.000	C61018	C81018
3/16	.1875	3/16	5/8	2	2	0.010	C61019	C81019
3/16	.1875	3/16	3/4	2-1/2	2	0.000	C61020	C81020
3/16	.1875	3/16	1-1/8	3	2	0.000	C61021	C81021
13/64	.2031	1/4	5/8	2-1/2	2	0.000	C61022	C81022
7/32	.2188	1/4	5/8	2-1/2	2	0.000	C61023	C81023
15/64	.2344	1/4	3/4	2-1/2	2	0.000	C61024	C81024
1/4	.2500	1/4	1/2	2	2	0.000	C61025	C81025
1/4	.2500	1/4	3/4	2-1/2	2	0.000	C61026	C81026
1/4	.2500	1/4	3/4	2-1/2	2	0.020	C61027	C81027
1/4	.2500	1/4	3/4	2-1/2	2	0.030	C61028	C81028
1/4	.2500	1/4	1-1/8	3	2	0.000	C61029	C81029
1/4	.2500	1/4	1-1/2	4	2	0.000	C61030	C81030
1/4	.2500	1/4	1-1/2	6	2	0.000	C61031	C81031
17/64	.2656	5/16	7/8	2-1/2	2	0.000	C61032	C81032
9/32	.2812	5/16	7/8	2-1/2	2	0.000	C61033	C81033
5/16	.3125	5/16	1/2	2	2	0.000	C61034	C81034
5/16	.3125	5/16	7/8	2-1/2	2	0.000	C61035	C81035

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	★		★				★	★		☆		
	TiAlN	☆		☆		★	★	☆	☆				

☆ = Best Performance

★ = Acceptable

General Purpose

Style: **CEM-SE2** (continued)

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-SE2	
fractional	decimal						bright	TiAIN
5/16	.3125	5/16	13/16	2-1/2	2	0.020	C61036	C81036
5/16	.3125	5/16	13/16	2-1/2	2	0.030	C61037	C81037
5/16	.3125	5/16	1-1/8	3	2	0.000	C61038	C81038
5/16	.3125	5/16	1-5/8	4	2	0.000	C61039	C81039
3/8	.3750	3/8	5/8	2	2	0.000	C61040	C81040
3/8	.3750	3/8	1	2-1/2	2	0.000	C61041	C81041
3/8	.3750	3/8	1	2-1/2	2	0.020	C61042	C81042
3/8	.3750	3/8	1	2-1/2	2	0.030	C61043	C81043
3/8	.3750	3/8	1	2-1/2	2	0.045	C61044	C81044
3/8	.3750	3/8	1-1/8	3	2	0.000	C61045	C81045
3/8	.3750	3/8	1 3/4	4	2	0.000	C61046	C81046
3/8	.3750	3/8	1-1/2	6	2	0.000	C61047	C81047
7/16	.4375	7/16	5/8	2-1/2	2	0.000	C61048	C81048
7/16	.4375	7/16	1	2-1/2	2	0.000	C61049	C81049
7/16	.4375	7/16	2	4	2	0.000	C61050	C81050
7/16	.4375	7/16	3	6	2	0.000	C61051	C81051
1/2	.5000	1/2	5/8	2-1/2	2	0.000	C61052	C81052
1/2	.5000	1/2	1	3	2	0.000	C61053	C81053
1/2	.5000	1/2	1	3	2	0.030	C61054	C81054
1/2	.5000	1/2	1	3	2	0.060	C61055	C81055
1/2	.5000	1/2	1	3	2	0.090	C61056	C81056
1/2	.5000	1/2	2	4	2	0.000	C61057	C81057
1/2	.5000	1/2	1-1/2	6	2	0.000	C61058	C81058
1/2	.5000	1/2	3	6	2	0.000	C61059	C81059
9/16	.5625	9/16	1-1/4	3 1/2	2	0.000	C61060	C81060
5/8	.6250	5/8	3/4	3	2	0.000	C61061	C81061
5/8	.6250	5/8	1-1/4	3 1/2	2	0.000	C61062	C81062
5/8	.6250	5/8	1-1/4	3 1/2	2	0.030	C61063	C81063
5/8	.6250	5/8	1-1/4	3 1/2	2	0.060	C61064	C81064
5/8	.6250	5/8	1-1/4	3 1/2	2	0.090	C61065	C81065
5/8	.6250	5/8	2-1/4	5	2	0.000	C61066	C81066
5/8	.6250	5/8	3	6	2	0.000	C61067	C81067
3/4	.7500	3/4	1	3	2	0.000	C61068	C81068
3/4	.7500	3/4	1-1/2	4	2	0.000	C61069	C81069
3/4	.7500	3/4	1-1/2	4	2	0.030	C61070	C81070
3/4	.7500	3/4	1-1/2	4	2	0.060	C61071	C81071
3/4	.7500	3/4	1-1/2	4	2	0.090	C61072	C81072
3/4	.7500	3/4	2-1/4	5	2	0.000	C61073	C81073
3/4	.7500	3/4	3	6	2	0.000	C61074	C81074
7/8	.8750	7/8	1-1/2	4	2	0.000	C61075	C81075
7/8	.8750	7/8	2-1/4	5	2	0.000	C61076	C81076
7/8	.8750	7/8	3	6	2	0.000	C61077	C81077
1	1.0000	1	1-1/2	4	2	0.000	C61078	C81078
1	1.0000	1	1-1/2	4	2	0.030	C61079	C81079
1	1.0000	1	1-1/2	4	2	0.060	C61080	C81080
1	1.0000	1	1-1/2	4	2	0.090	C61081	C81081
1	1.0000	1	2-1/4	5	2	0.000	C61082	C81082
1	1.0000	1	3	6	2	0.000	C61083	C81083

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	◆		◆				◆	◆	☆			
	TiAIN	☆		☆		◆	◆	☆	☆				

☆ = Best Performance ◆ = Acceptable

Style: CEM-SE2B
General Purpose

Solid Carbide

2 Flute CC


Helix 35°

Ball End

Surface Treatment

Bright

TiAlN

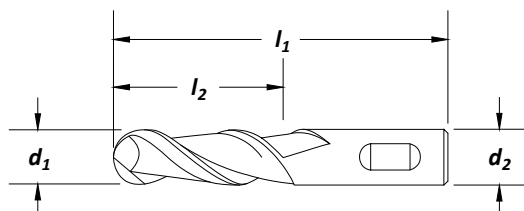

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-SE2B	
fractional	decimal					bright	TiAlN
1/32	.0312	1/8	1/8	1-1/2	2	C60914	C80914
3/64	.0469	1/8	1/8	1-1/2	2	C60915	C80915
1/16	.0625	1/8	1/8	1-1/2	2	C60916	C80916
1/16	.0625	1/8	3/16	1-1/2	2	C60917	C80917
5/64	.0781	1/8	3/16	1-1/2	2	C60918	C80918
3/32	.0938	1/8	3/8	1-1/2	2	C60919	C80919
7/64	.1094	1/8	3/8	1-1/2	2	C60920	C80920
1/8	.1250	1/8	1/4	1-1/2	2	C60921	C80921
1/8	.1250	1/8	1/2	1-1/2	2	C60922	C80922
1/8	.1250	1/8	3/4	2-1/4	2	C60923	C80923
1/8	.1250	1/8	1	3	2	C60924	C80924
9/64	.1406	3/16	9/16	2	2	C60925	C80925
5/32	.1562	3/16	9/16	2	2	C60926	C80926
11/64	.1719	3/16	5/8	2	2	C60927	C80927
3/16	.1875	3/16	5/16	2	2	C60928	C80928
3/16	.1875	3/16	5/8	2	2	C60929	C80929
3/16	.1875	3/16	3/4	2-1/2	2	C60930	C80930
3/16	.1875	3/16	1-1/8	3	2	C60931	C80931
13/64	.2031	1/4	5/8	2-1/2	2	C60932	C80932
7/32	.2188	1/4	5/8	2-1/2	2	C60933	C80933
15/64	.2344	1/4	3/4	2-1/2	2	C60934	C80934
1/4	.2500	1/4	1/2	2	2	C60935	C80935
1/4	.2500	1/4	3/4	2-1/2	2	C60936	C80936
1/4	.2500	1/4	1-1/8	3	2	C60937	C80937
1/4	.2500	1/4	1-1/2	4	2	C60938	C80938
1/4	.2500	1/4	1-1/2	6	2	C60939	C80939
17/64	.2656	5/16	7/8	2-1/2	2	C60940	C80940
9/32	.2812	5/16	7/8	2-1/2	2	C60941	C80941
5/16	.3125	5/16	1/2	2	2	C60942	C80942
5/16	.3125	5/16	7/8	2-1/2	2	C60943	C80943
5/16	.3125	5/16	1-1/8	3	2	C60944	C80944
5/16	.3125	5/16	1-5/8	4	2	C60945	C80945
3/8	.3750	3/8	5/8	2	2	C60946	C80946
3/8	.3750	3/8	1	2-1/2	2	C60947	C80947
3/8	.3750	3/8	1-1/8	3	2	C60948	C80948
3/8	.3750	3/8	1 3/4	4	2	C60949	C80949
3/8	.3750	3/8	1-1/2	6	2	C60950	C80950

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
Bright	★			★				★	★	☆			
TiAlN	☆			☆		★	★	☆	☆				

★ = Best Performance

◆ = Acceptable

General Purpose

Style: **CEM-SE2B** (continued)

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-SE2B	
fractional	decimal					bright	TiAlN
7/16	.4375	7/16	5/8	2-1/2	2	C60951	C80951
7/16	.4375	7/16	1	2-1/2	2	C60952	C80952
7/16	.4375	7/16	2	4	2	C60953	C80953
7/16	.4375	7/16	3	6	2	C60954	C80954
1/2	.5000	1/2	5/8	2-1/2	2	C60955	C80955
1/2	.5000	1/2	1	3	2	C60956	C80956
1/2	.5000	1/2	2	4	2	C60957	C80957
1/2	.5000	1/2	3	6	2	C60958	C80958
1/2	.5000	1/2	1-1/2	6	2	C60959	C80959
9/16	.5625	9/16	1-1/4	3 1/2	2	C60960	C80960
5/8	.6250	5/8	3/4	3	2	C60961	C80961
5/8	.6250	5/8	1-1/4	3 1/2	2	C60962	C80962
5/8	.6250	5/8	2-1/4	5	2	C60963	C80963
5/8	.6250	5/8	3	6	2	C60964	C80964
3/4	.7500	3/4	1	3	2	C60965	C80965
3/4	.7500	3/4	1-1/2	4	2	C60966	C80966
3/4	.7500	3/4	2-1/4	5	2	C60967	C80967
3/4	.7500	3/4	3	6	2	C60968	C80968
7/8	.8750	7/8	1-1/2	4	2	C60969	C80969
7/8	.8750	7/8	2-1/4	5	2	C60970	C80970
7/8	.8750	7/8	3	6	2	C60971	C80971
1	1.0000	1	1-1/2	4	2	C60972	C80972
1	1.0000	1	2-1/4	5	2	C60973	C80973
1	1.0000	1	3	6	2	C60974	C80974

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	★		★					★	★	☆			
TiAlN	☆		☆		★	★		☆	☆				

☆ = Best Performance

★ = Acceptable

Style: CEM-SE3
General Purpose

Solid Carbide

Helix 30°

3 Flute CC


Radius End

Square End

Surface Treatment

Bright

TiAIN

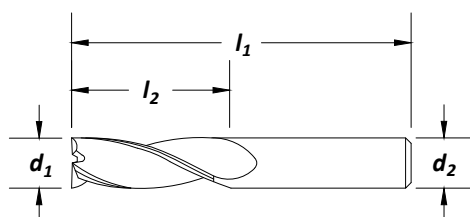

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-SE3	
fractional	decimal						bright	TiAIN
1/16	.0625	1/8	3/16	1-1/2	3	0.000	C61657	C81657
5/64	.0781	1/8	3/16	1-1/2	3	0.000	C61658	C81658
3/32	.0938	1/8	3/8	1-1/2	3	0.000	C61659	C81659
7/64	.1094	1/8	3/8	1-1/2	3	0.000	C61660	C81660
1/8	.1250	1/8	1/2	1-1/2	3	0.000	C61661	C81661
1/8	.1250	1/8	1/2	1-1/2	3	0.010	C61662	C81662
9/64	.1406	3/16	9/16	2	3	0.000	C61663	C81663
5/32	.1562	3/16	9/16	2	3	0.000	C61664	C81664
11/64	.1719	3/16	5/8	2	3	0.000	C61665	C81665
3/16	.1875	3/16	5/8	2	3	0.000	C61666	C81666
3/16	.1875	3/16	5/8	2	3	0.010	C61667	C81667
13/64	.2031	1/4	5/8	2-1/2	3	0.000	C61668	C81668
7/32	.2188	1/4	5/8	2-1/2	3	0.000	C61669	C81669
15/64	.2344	1/4	3/4	2-1/2	3	0.000	C61670	C81670
1/4	.2500	1/4	3/4	2-1/2	3	0.000	C61671	C81671
1/4	.2500	1/4	3/4	2-1/2	3	0.020	C61672	C81672
1/4	.2500	1/4	3/4	2-1/2	3	0.030	C61673	C81673
17/64	.2656	5/16	7/8	2-1/2	3	0.000	C61674	C81674
9/32	.2812	5/16	7/8	2-1/2	3	0.000	C61675	C81675
5/16	.3125	5/16	13/16	2-1/2	3	0.000	C61676	C81676
5/16	.3125	5/16	13/16	2-1/2	3	0.020	C61677	C81677
5/16	.3125	5/16	13/16	2-1/2	3	0.030	C61678	C81678
3/8	.3750	3/8	7/8	2-1/2	3	0.000	C61679	C81679
3/8	.3750	3/8	7/8	2-1/2	3	0.020	C61680	C81680
3/8	.3750	3/8	7/8	2-1/2	3	0.030	C61681	C81681
3/8	.3750	3/8	7/8	2-1/2	3	0.045	C61682	C81682
7/16	.4375	7/16	7/8	2-1/2	3	0.000	C61683	C81683
1/2	.5000	1/2	1	3	3	0.000	C61684	C81684
1/2	.5000	1/2	1	3	3	0.030	C61685	C81685
1/2	.5000	1/2	1	3	3	0.060	C61686	C81686
1/2	.5000	1/2	1	3	3	0.090	C61687	C81687
9/16	.5625	9/16	1-1/4	3 1/2	3	0.000	C61688	C81688
5/8	.6250	5/8	1-1/4	3 1/2	3	0.000	C61689	C81689
5/8	.6250	5/8	1-1/4	3 1/2	3	0.030	C61690	C81690
5/8	.6250	5/8	1-1/4	3 1/2	3	0.060	C61691	C81691
5/8	.6250	5/8	1-1/4	3 1/2	3	0.090	C61692	C81692
3/4	.7500	3/4	1-1/2	4	3	0.000	C61693	C81693
3/4	.7500	3/4	1-1/2	4	3	0.030	C61694	C81694
3/4	.7500	3/4	1-1/2	4	3	0.060	C61695	C81695
3/4	.7500	3/4	1-1/2	4	3	0.090	C61696	C81696
7/8	.8750	7/8	1-1/2	4	3	0.000	C61697	C81697
1	1.0000	1	1-1/2	4	3	0.000	C61698	C81698
1	1.0000	1	1-1/2	4	3	0.030	C61699	C81699
1	1.0000	1	1-1/2	4	3	0.060	C61700	C81700
1	1.0000	1	1-1/2	4	3	0.090	C61701	C81701


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	★		★				★	★		★		
	TiAIN	★		★		★	★	★	★				

★ = Best Performance

◆ = Acceptable

Note

General purpose applications.
30° right hand spiral-right hand cut
Diameter tolerance: $\pm 0.0005"$

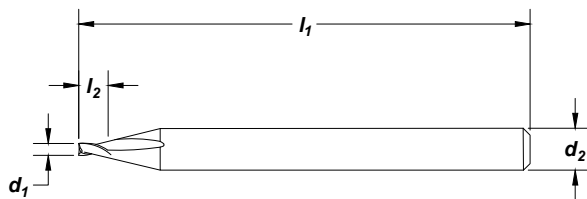
**Surface
Treatment**


cutting diameter d₁	shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	description	order number	
					CMCE-4 Bright	CMCE-4AL AlCrN
0.0100	1/8	0.0300	1-1/2	0.0100x1/8x1-1/2	C76057	—
0.0110	1/8	0.0330	1-1/2	0.0110x1/8x1-1/2	C76058	—
0.0120	1/8	0.0360	1-1/2	0.0120x1/8x1-1/2	C76059	—
0.0130	1/8	0.0390	1-1/2	0.0130x1/8x1-1/2	C76060	—
0.0140	1/8	0.0420	1-1/2	0.0140x1/8x1-1/2	C76061	—
0.0150	1/8	0.0450	1-1/2	0.0150x1/8x1-1/2	C76062	—
0.0200	1/8	0.0600	1-1/2	0.0200x1/8x1-1/2	C76063	—
0.0250	1/8	0.0750	1-1/2	0.0250x1/8x1-1/2	C76064	—
0.0260	1/8	0.0780	1-1/2	0.0260x1/8x1-1/2	C76065	—
0.0300	1/8	0.0900	1-1/2	0.0300x1/8x1-1/2	C76066	—
0.0312	1/8	0.0930	1-1/2	0.0312x1/8x1-1/2	C76067	C76235
0.0330	1/8	0.0990	1-1/2	0.0330x1/8x1-1/2	C76068	C76236
0.0350	1/8	0.1050	1-1/2	0.0350x1/8x1-1/2	C76069	C76237
0.0400	1/8	0.1200	1-1/2	0.0400x1/8x1-1/2	C76070	C76238
0.0450	1/8	0.1350	1-1/2	0.0450x1/8x1-1/2	C76071	C76239
0.0470	1/8	0.1410	1-1/2	0.0470x1/8x1-1/2	C76072	C76240
0.0500	1/8	0.1500	1-1/2	0.0500x1/8x1-1/2	C76073	C76241
0.0550	1/8	0.1650	1-1/2	0.0550x1/8x1-1/2	C76074	C76242
0.0600	1/8	0.180	1-1/2	0.0600x1/8x1-1/2	C76075	C76243
0.0625	1/8	0.1875	1-1/2	0.0625x1/8x1-1/2	C76076	C76244
0.0640	1/8	0.1920	1-1/2	0.0640x1/8x1-1/2	C76077	C76245
0.0650	1/8	0.1950	1-1/2	0.0650x1/8x1-1/2	C76078	C76246
0.0700	1/8	0.2100	1-1/2	0.0700x1/8x1-1/2	C76079	C76247
0.0750	1/8	0.2250	1-1/2	0.0750x1/8x1-1/2	C76080	C76248
0.0780	1/8	0.2343	1-1/2	0.0780x1/8x1-1/2	C76081	C76249
0.0800	1/8	0.2400	1-1/2	0.0800x1/8x1-1/2	C76082	C76250
0.0850	1/8	0.2550	1-1/2	0.0850x1/8x1-1/2	C76083	C76251
0.0900	1/8	0.2700	1-1/2	0.0900x1/8x1-1/2	C76084	C76252
0.0938	1/8	0.2814	1-1/2	0.0938x1/8x1-1/2	C76085	C76253
0.0950	1/8	0.2850	1-1/2	0.0950x1/8x1-1/2	C76086	C76254
0.1000	1/8	0.3000	1-1/2	0.1000x1/8x1-1/2	C76087	C76255
0.1030	1/8	0.3090	1-1/2	0.1030x1/8x1-1/2	C76088	C76256
0.1200	1/8	0.3600	1-1/2	0.1200x1/8x1-1/2	C76089	C76257


continued on next page

cutting diameter		shank diameter	length of cut	overall length	description	order number	
d ₁						CMCE-4	CMCE-4AL
(mm)	(in)	d ₂	l ₂ (in)	l ₁ (in)		Bright	AlCrN
.5mm	0.0197	1/8	0.0591	1-1/2	.5mmx1/8x1-1/2	C76090	—
1.0mm	0.0394	1/8	0.1182	1-1/2	1.0mmx1/8x1-1/2	C76091	C76258
1.25mm	0.0492	1/8	0.1476	1-1/2	1.25mmx1/8x1-1/2	C76092	C76259
1.5mm	0.0591	1/8	0.1773	1-1/2	1.5mmx1/8x1-1/2	C76093	C76260
1.6mm	0.0630	1/8	0.1890	1-1/2	1.6mmx1/8x1-1/2	C76094	C76261
1.8mm	0.0709	1/8	0.2127	1-1/2	1.8mmx1/8x1-1/2	C76095	C76262
2.0mm	0.0787	1/8	0.2361	1-1/2	2.0mmx1/8x1-1/2	C76096	C76263
2.2mm	0.0866	1/8	0.2598	1-1/2	2.2mmx1/8x1-1/2	C76097	C76264
2.5mm	0.0984	1/8	0.2952	1-1/2	2.5mmx1/8x1-1/2	C76098	C76265
2.8mm	0.1102	1/8	0.3306	1-1/2	2.8mmx1/8x1-1/2	C76099	C76266
3.0mm	0.1181	1/8	0.3543	1-1/2	3.0mmx1/8x1-1/2	C76100	C76267
3.5mm	0.1378	3/16	0.1875	2	3.5mmx3/16x2	C76101	C76268
4.5mm	0.1772	3/16	0.5316	2	4.5mmx3/16x2	C76102	C76269

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
Hardness	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	★		★		★	★		★	★				
AlCrN	★	★	★	★	★	★	★	★	★	★	★	★	★

★ = Best Performance

◆ = Acceptable

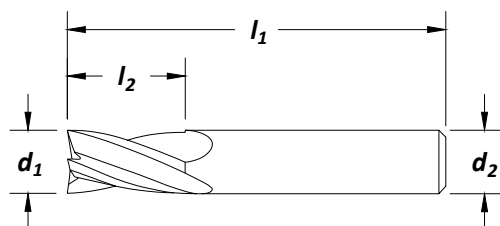Solid
CarbideSurface
Treatment

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-SE4	
fractional	decimal						bright	TiAlN
1/32	.0312	1/8	1/16	1-1/2	4	0.000	C61805	C81805
1/32	.0312	1/8	1/8	1-1/2	4	0.000	C61806	C81806
3/64	.0469	1/8	1/8	1-1/2	4	0.000	C61807	C81807
1/16	.0625	1/8	1/8	1-1/2	4	0.000	C61808	C81808
1/16	.0625	1/8	3/16	1-1/2	4	0.000	C61809	C81809
1/16	.0625	1/8	1/4	1-1/2	4	0.010	C61810	C81810
5/64	.0781	1/8	3/16	1-1/2	4	0.000	C61811	C81811
3/32	.0938	1/8	3/16	1-1/2	4	0.000	C61812	C81812
3/32	.0938	1/8	3/8	1-1/2	4	0.000	C61813	C81813
3/32	.0938	1/8	3/8	1-1/2	4	0.010	C61814	C81814
3/32	.0938	1/8	3/8	1-1/2	4	0.020	C61815	C81815
7/64	.1094	1/8	1/4	1-1/2	4	0.000	C61816	C81816
7/64	.1094	1/8	3/8	1-1/2	4	0.000	C61817	C81817
1/8	.1250	1/8	1/4	1-1/2	4	0.000	C61818	C81818
1/8	.1250	1/8	1/2	1-1/2	4	0.000	C61819	C81819
1/8	.1250	1/8	1/2	1-1/2	4	0.010	C61820	C81820
1/8	.1250	1/8	1/2	1-1/2	4	0.015	C61821	C81821
1/8	.1250	1/8	1/2	1-1/2	4	0.020	C61822	C81822
1/8	.1250	1/8	3/4	2-1/4	4	0.000	C61824	C81824
1/8	.1250	1/8	1	3	4	0.000	C61825	C81825
9/64	.1406	3/16	9/16	2	4	0.000	C61827	C81827
5/32	.1562	3/16	5/16	2	4	0.000	C61828	C81828
5/32	.1562	3/16	9/16	2	4	0.000	C61829	C81829
11/64	.1719	3/16	5/8	2	4	0.000	C61830	C81830
3/16	.1875	3/16	5/16	2	4	0.000	C61831	C81831
3/16	.1875	3/16	5/8	2	4	0.000	C61832	C81832
3/16	.1875	3/16	5/8	2	4	0.010	C61833	C81833
3/16	.1875	3/16	5/8	2	4	0.015	C61834	C81834
3/16	.1875	3/16	5/8	2	4	0.020	C61835	C81835
3/16	.1875	3/16	5/8	2	4	0.030	C61836	C81836
3/16	.1875	3/16	3/4	2-1/2	4	0.000	C61837	C81837
3/16	.1875	3/16	1	3	4	0.000	C61838	C81838
3/16	.1875	3/16	1	3	4	0.045	C61839	C81839
3/16	.1875	3/16	1-1/8	3	4	0.000	C61840	C81840
3/16	.1875	3/16	1	4	4	0.000	C61841	C81841
3/16	.1875	3/16	1	4	4	0.045	C61842	C81842
13/64	.2031	1/4	5/8	2-1/2	4	0.000	C61843	C81843
7/32	.2188	1/4	5/8	2-1/2	4	0.000	C61844	C81844
15/64	.2344	1/4	3/4	2-1/2	4	0.000	C61845	C81845

continued on next page

Style: CEM-SE4 (continued)
General Purpose

cutting diameter d ₁		shank diameter d ₂	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	corner radius	order number CEM-SE4	
fractional	decimal						bright	TiAlN
1/4	.2500	1/4	1/2	2	4	0.000	C61846	C81846
1/4	.2500	1/4	3/4	2-1/2	4	0.000	C61847	C81847
1/4	.2500	1/4	3/4	2-1/2	4	0.010	C61848	C81848
1/4	.2500	1/4	3/4	2-1/2	4	0.015	C61849	C81849
1/4	.2500	1/4	3/4	2-1/2	4	0.020	C61850	C81850
1/4	.2500	1/4	3/4	2-1/2	4	0.030	C61851	C81851
1/4	.2500	1/4	3/4	2-1/2	4	0.045	C61852	C81852
1/4	.2500	1/4	3/4	2-1/2	4	0.060	C61853	C81853
1/4	.2500	1/4	1-1/8	3	4	0.000	C61854	C81854
1/4	.2500	1/4	1-1/2	4	4	0.000	C61855	C81855
1/4	.2500	1/4	1-1/2	6	4	0.000	C61856	C81856
17/64	.2656	5/16	7/8	2-1/2	4	0.000	C61857	C81857
9/32	.2812	5/16	7/8	2-1/2	4	0.000	C61858	C81858
19/64	.2969	5/16	7/8	2-1/2	4	0.000	C61859	C81859
5/16	.3125	5/16	1/2	2	4	0.000	C61860	C81860
5/16	.3125	5/16	7/8	2-1/2	4	0.000	C61861	C81861
5/16	.3125	5/16	13/16	2-1/2	4	0.020	C61862	C81862
5/16	.3125	5/16	13/16	2-1/2	4	0.030	C61863	C81863
5/16	.3125	5/16	1	3	4	0.000	C61864	C81864
5/16	.3125	5/16	1-1/8	3	4	0.000	C61865	C81865
5/16	.3125	5/16	1-5/8	4	4	0.000	C61866	C81866
21/64	.3281	3/8	7/8	2-1/2	4	0.000	C61867	C81867
11/32	.3438	3/8	7/8	2-1/2	4	0.000	C61868	C81868
23/64	.3594	3/8	7/8	2-1/2	4	0.000	C61869	C81869
3/8	.3750	3/8	5/8	2	4	0.000	C61870	C81870
3/8	.3750	3/8	1	2-1/2	4	0.000	C61871	C81871
3/8	.3750	3/8	1	2-1/2	4	0.010	C61872	C81872
3/8	.3750	3/8	1	2-1/2	4	0.015	C61873	C81873
3/8	.3750	3/8	1	2-1/2	4	0.020	C61874	C81874
3/8	.3750	3/8	1	2-1/2	4	0.030	C61875	C81875
3/8	.3750	3/8	1	2-1/2	4	0.045	C61876	C81876
3/8	.3750	3/8	1	2-1/2	4	0.060	C61877	C81877
3/8	.3750	3/8	1	4	4	0.000	C61879	C81879
3/8	.3750	3/8	1	4	4	0.020	C61880	C81880
3/8	.3750	3/8	1-1/8	3	4	0.000	C61878	C81878
3/8	.3750	3/8	1 3/4	4	4	0.000	C61881	C81881
3/8	.3750	3/8	1-1/2	6	4	0.000	C61882	C81882
25/64	.3906	7/16	7/8	2-1/2	4	0.000	C61883	C81883
13/32	.4062	7/16	7/8	2-1/2	4	0.000	C61884	C81884
27/64	.4218	7/16	7/8	2-1/2	4	0.000	C61885	C81885

continued on next page

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				>45
Bright	★			★				★	★	★			
TiAlN	★			★		★	★	★	★				

★ = Best Performance

◆ = Acceptable

General Purpose

Style: **CEM-SE4** (continued)

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	corner radius	order number CEM-SE4	
fractional	decimal						bright	TiAlN
7/16	.4375	7/16	5/8	2-1/2	4	0.000	C61886	C81886
7/16	.4375	7/16	1	2-1/2	4	0.000	C61887	C81887
7/16	.4375	7/16	2	4	4	0.000	C61888	C81888
7/16	.4375	7/16	3	6	4	0.000	C61889	C81889
29/64	.4531	1/2	1	3	4	0.000	C61890	C81890
15/32	.4688	1/2	1	3	4	0.000	C61891	C81891
31/64	.4844	1/2	1	3	4	0.000	C61892	C81892
1/2	.5000	1/2	5/8	2-1/2	4	0.000	C61893	C81893
1/2	.5000	1/2	1	3	4	0.000	C61894	C81894
1/2	.5000	1/2	1	3	4	0.015	C61895	C81895
1/2	.5000	1/2	1	3	4	0.020	C61896	C81896
1/2	.5000	1/2	1	3	4	0.030	C61897	C81897
1/2	.5000	1/2	1	3	4	0.045	C61898	C81898
1/2	.5000	1/2	1	3	4	0.060	C61899	C81899
1/2	.5000	1/2	1	3	4	0.090	C61900	C81900
1/2	.5000	1/2	1	3	4	0.125	C61901	C81901
1/2	.5000	1/2	2	4	4	0.000	C61902	C81902
1/2	.5000	1/2	3	6	4	0.000	C61903	C81903
1/2	.5000	1/2	1-1/2	6	4	0.000	C61904	C81904
9/16	.5625	9/16	1-1/4	3 1/2	4	0.000	C61905	C81905
5/8	.6250	5/8	3/4	3	4	0.000	C61906	C81906
5/8	.6250	5/8	1-1/4	3 1/2	4	0.000	C61907	C81907
5/8	.6250	5/8	1-1/4	3 1/2	4	0.030	C61908	C81908
5/8	.6250	5/8	1-1/4	3 1/2	4	0.060	C61909	C81909
5/8	.6250	5/8	1-1/4	3 1/2	4	0.090	C61910	C81910
5/8	.6250	5/8	2-1/4	5	4	0.000	C61911	C81911
5/8	.6250	5/8	3	6	4	0.000	C61912	C81912
3/4	.7500	3/4	1	3	4	0.000	C61913	C81913
3/4	.7500	3/4	1-1/2	4	4	0.000	C61914	C81914
3/4	.7500	3/4	1-1/2	4	4	0.030	C61915	C81915
3/4	.7500	3/4	1-1/2	4	4	0.060	C61916	C81916
3/4	.7500	3/4	1-1/2	4	4	0.090	C61917	C81917
3/4	.7500	3/4	2-1/4	5	4	0.000	C61918	C81918
3/4	.7500	3/4	3	6	4	0.000	C61919	C81919
7/8	.8750	7/8	1-1/2	4	4	0.000	C61920	C81920
7/8	.8750	7/8	2-1/4	5	4	0.000	C61921	C81921
7/8	.8750	7/8	3	6	4	0.000	C61922	C81922
1	1.0000	1	1-1/2	4	4	0.000	C61923	C81923
1	1.0000	1	1-1/2	4	4	0.030	C61924	C81924
1	1.0000	1	1-1/2	4	4	0.060	C61925	C81925
1	1.0000	1	1-1/2	4	4	0.090	C61926	C81926
1	1.0000	1	2-1/4	5	4	0.000	C61927	C81927
1	1.0000	1	3	6	4	0.000	C61928	C81928

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				
	Hardness												
Bright	★		★					★	★	☆			
TiAlN	☆		☆		★	★		☆	☆				

☆ = Best Performance ★ = Acceptable

Style: CEM-SE4B
General Purpose


Solid Carbide



Surface Treatment

Bright

TiAlN

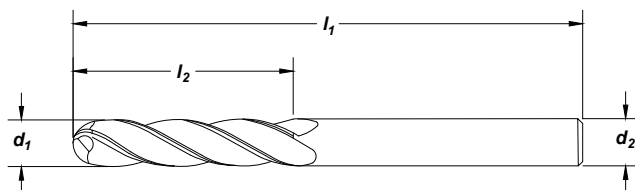

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-SE4B	
fractional	decimal	d₂				bright	TiAlN
1/32	.0312	1/8	1/16	1-1/2	4	C63509	C83509
1/32	.0312	1/8	1/8	1-1/2	4	C63510	C83510
1/32	.0312	1/8	3/32	1-1/2	4	C63511	C83511
3/64	.0469	1/8	1/8	1-1/2	4	C63512	C83512
1/16	.0625	1/8	1/8	1-1/2	4	C63513	C83513
1/16	.0625	1/8	3/16	1-1/2	4	C63514	C83514
5/64	.0781	1/8	3/16	1-1/2	4	C63515	C83515
3/32	.0938	1/8	3/8	1-1/2	4	C63516	C83516
3/32	.0938	1/8	3/16	1-1/2	4	C63517	C83517
7/64	.1094	1/8	3/8	1-1/2	4	C63518	C83518
1/8	.1250	1/8	1/4	1-1/2	4	C63519	C83519
1/8	.1250	1/8	1/2	1-1/2	4	C63520	C83520
1/8	.1250	1/8	5/8	2	4	C63521	C83521
1/8	.1250	1/8	3/4	2-1/4	4	C63522	C83522
1/8	.1250	1/8	1	3	4	C63523	C83523
9/64	.1406	3/16	9/16	2	4	C63524	C83524
5/32	.1562	3/16	5/16	2	4	C63525	C83525
5/32	.1562	3/16	9/16	2	4	C63526	C83526
11/64	.1719	3/16	5/8	2	4	C63527	C83527
3/16	.1875	3/16	5/16	2	4	C63528	C83528
3/16	.1875	3/16	5/8	2	4	C63529	C83529
3/16	.1875	3/16	3/4	2-1/2	4	C63530	C83530
3/16	.1875	3/16	1-1/8	3	4	C63531	C83531
13/64	.2031	1/4	5/8	2-1/2	4	C63532	C83532
7/32	.2188	1/4	5/8	2-1/2	4	C63533	C83533
15/64	.2344	1/4	3/4	2-1/2	4	C63534	C83534
1/4	.2500	1/4	1/2	2	4	C63535	C83535
1/4	.2500	1/4	3/4	2-1/2	4	C63536	C83536
1/4	.2500	1/4	1	4	4	C63537	C83537
1/4	.2500	1/4	1-1/8	3	4	C63538	C83538
1/4	.2500	1/4	1-1/2	4	4	C63539	C83539
1/4	.2500	1/4	1-1/2	6	4	C63540	C83540

continued on next page

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	◆		◆				◆	◆	☆			
	TiAlN	☆		☆		◆	◆	☆	☆				

☆ = Best Performance

◆ = Acceptable

General Purpose

Style: **CEM-SE4B** (continued)

cutting diameter d ₁		shank diameter d ₂	length of cut l ₂ (in)	overall length l ₁ (in)	no. of flutes	order number CEM-SE4B	
fractional	decimal					bright	TiAIN
17/64	.2656	5/16	7/8	2-1/2	4	C63541	C83541
9/32	.2812	5/16	7/8	2-1/2	4	C63542	C83542
5/16	.3125	5/16	1/2	2	4	C63543	C83543
5/16	.3125	5/16	7/8	2-1/2	4	C63544	C83544
5/16	.3125	5/16	1-1/8	3	4	C63545	C83545
5/16	.3125	5/16	1-5/8	4	4	C63546	C83546
23/64	.3594	3/8	7/8	2-1/2	4	C63547	C83547
3/8	.3750	3/8	5/8	2	4	C63548	C83548
3/8	.3750	3/8	1	2-1/2	4	C63549	C83549
3/8	.3750	3/8	1-1/8	3	4	C63550	C83550
3/8	.3750	3/8	1-1/2	6	4	C63551	C83551
3/8	.3750	3/8	1 3/4	4	4	C63552	C83552
25/64	.3906	7/16	7/8	2-1/2	4	C63553	C83553
27/64	.4219	7/16	7/8	2-1/2	4	C63554	C83554
7/16	.4375	7/16	5/8	2-1/2	4	C63555	C83555
7/16	.4375	7/16	1	2-1/2	4	C63556	C83556
7/16	.4375	7/16	2	4	4	C63557	C83557
7/16	.4375	7/16	3	6	4	C63558	C83558
31/64	.4844	1/2	1	3	4	C63559	C83559
1/2	.5000	1/2	5/8	2-1/2	4	C63560	C83560
1/2	.5000	1/2	1	3	4	C63561	C83561
1/2	.5000	1/2	2	4	4	C63562	C83562
1/2	.5000	1/2	1-1/2	6	4	C63563	C83563
1/2	.5000	1/2	3	6	4	C63564	C83564
9/16	.5625	9/16	1-1/4	3 1/2	4	C63565	C83565
5/8	.6250	5/8	3/4	3	4	C63566	C83566
5/8	.6250	5/8	1-1/4	3 1/2	4	C63567	C83567
5/8	.6250	5/8	2-1/4	5	4	C63568	C83568
5/8	.6250	5/8	3	6	4	C63569	C83569
3/4	.7500	3/4	1	3	4	C63570	C83570
3/4	.7500	3/4	1-1/2	4	4	C63571	C83571
3/4	.7500	3/4	2-1/4	5	4	C63572	C83572
3/4	.7500	3/4	3	6	4	C63573	C83573
7/8	.8750	7/8	1-1/2	4	4	C63574	C83574
7/8	.8750	7/8	2-1/4	5	4	C63575	C83575
7/8	.8750	7/8	3	6	4	C63576	C83576
1	1.0000	1	1-1/2	4	4	C63577	C83577
1	1.0000	1	2-1/4	5	4	C63578	C83578
1	1.0000	1	3	6	4	C63579	C83579


Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	> 38	300 Series	400 series	18-22	22-32				
	Bright	★		★				★	★		☆		
	TiAIN	☆		☆		★	★	☆	☆				

☆ = Best Performance ★ = Acceptable

Style: CEM-SEST2
General Purpose
Straight Flute

Surface Treatment


Bright

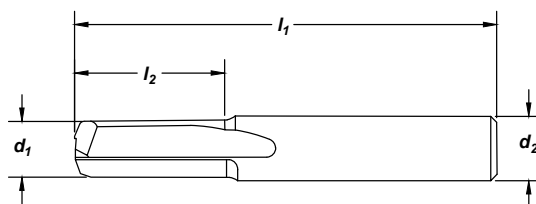
TiAlN


cutting diameter d₁		shank diameter d₂	length of cut l₂ (i n)	overall length l₁ (in)	no. of flutes	order number CEM-SEST2	
fractional	decimal					bright	TiAlN
1/16	.0625	1/8	3/16	1-1/2	2	C60649	C80649
1/8	.1250	1/8	1/2	1-1/2	2	C60650	C80650
3/16	.1875	3/16	5/8	2	2	C60651	C80651
1/4	.2500	1/4	3/4	2-1/2	2	C60652	C80652
5/16	.3125	5/16	13/16	2-1/2	2	C60653	C80653
3/8	.3750	3/8	7/8	2-1/2	2	C60654	C80654
1/2	.5000	1/2	1	3	2	C60655	C80655

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
	Bright	★		★				★	★		☆		
	TiAlN	☆		☆		★	★	☆	☆				★

☆ = Best Performance ★ = Acceptable

Style: CEM-EG2
Engraving Tool

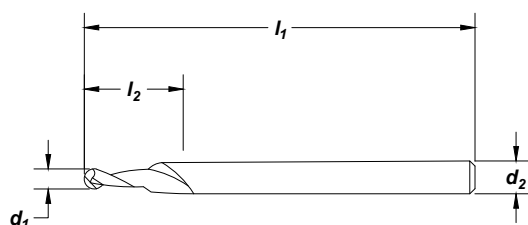Surface Treatment

TiCN


cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	no. of flutes	order number CEM-EG2	
decimal	metric					TiCN	
.021	0.53	1/8	.040	1-1/2	2	C70374	
.025	0.64	1/8	.040	1-1/2	2	C70375	
.030	0.76	1/8	.040	1-1/2	2	C70376	

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness	13-38	>38	16-38	>38	300 Series	400 series	18-22	22-32				
	TiCN	☆		☆				☆	☆		☆		

☆ = Best Performance ★ = Acceptable



Note
60°, 82°, 90°, & 120° Point

Solid
Carbide

2 Flute CC

Surface
Treatment

Bright

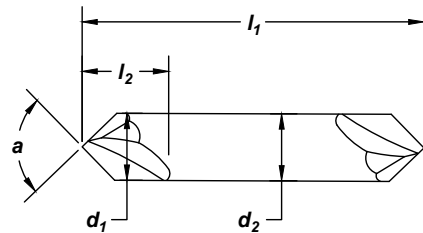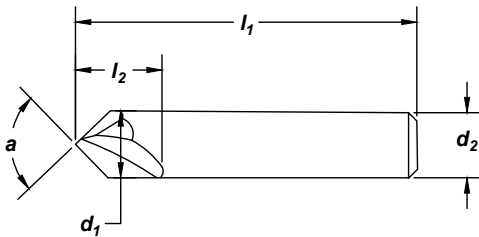

cutting diameter d ₁		shank diameter d ₂	length of cut l ₂ (in)	overall length l ₁ (in)	profile angle (°) a	order number	
fractional	decimal					CEM-CH2 single end	CEM-CH2D double end
1/8	.1250	1/8	1-1/2	2	60	C61112	—
1/8	.1250	1/8	1-1/2	2	82	C61113	—
1/8	.1250	1/8	1-1/2	2	90	C61114	C61226
3/16	.1875	3/16	2	2	90	C61115	C61227
1/4	.2500	1/4	2-1/2	2	60	C61116	—
1/4	.2500	1/4	2-1/2	2	82	C61117	—
1/4	.2500	1/4	2-1/2	2	90	C61118	C61228
3/8	.3750	3/8	2-1/2	2	60	C61119	—
3/8	.3750	3/8	2-1/2	2	82	C61120	—
3/8	.3750	3/8	2-1/2	2	90	C61121	C61229
3/8	.3750	3/8	2-1/2	2	120	C61127	—
1/2	.5000	1/2	3	2	60	C61122	—
1/2	.5000	1/2	3	2	82	C61123	—
1/2	.5000	1/2	3	2	90	C61124	C61230
1/2	.5000	1/2	3	2	120	C61125	—
3/4	.7500	3/4	4	2	90	C61126	C61231

Material Reference	Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	Hardness				300 Series	400 series		18-22	22-32				
Bright	☆	◆	☆	◆						◆			
☆ = Best Performance ◆ = Acceptable													



Note

60°, 82°, 90°, & 120° Point

Solid
Carbide

Surface
Treatment

Bright

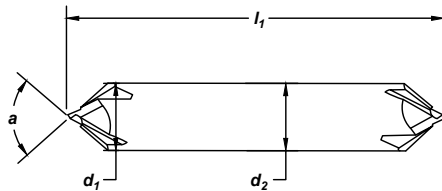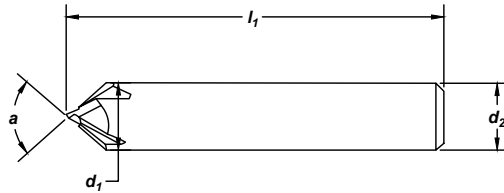

cutting diameter d₁		shank diameter d₂	length of cut l₂ (in)	overall length l₁ (in)	profile angle (°) a	order number	
fractional	decimal					CEM-CH4 single end	CEM-CH4D double end
1/4	.2500	1/4	2-1/2	4	60	C66219	—
1/4	.2500	1/4	2-1/2	4	82	C66220	—
1/4	.2500	1/4	2-1/2	4	90	C66221	C60228
3/8	.3750	3/8	2-1/2	4	60	C66222	—
3/8	.3750	3/8	2-1/2	4	82	C66223	—
3/8	.3750	3/8	2-1/2	4	90	C66224	C60229
3/8	.3750	3/8	2-1/2	4	120	C66218	—
1/2	.5000	1/2	3	4	60	C66225	—
1/2	.5000	1/2	3	4	82	C66226	—
1/2	.5000	1/2	3	4	90	C66227	C60230
1/2	.5000	1/2	3	4	120	C66228	—
3/4	.7500	3/4	4	4	90	C66229	C60231

Material Reference	Steel (HRC)				Stainless Steel			Cast Iron (HRC)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRC)
	Low Carbon		Alloy		Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	
	13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				>45
Bright	☆	◆	☆	◆				◆	◆	◆			◆

☆ = Best Performance ◆ = Acceptable



Technical Information

Nomenclature	306
End Mill Finishes and Their Applications	308
Speeds and Feeds	309
Operating Parameters	310
Operating Parameters, HSS and Cobalt	311
Operating Parameters, PM Plus™, HSS & Cobalt	313
End Mill Selection and Use	314

Carbide	
Operating Parameters, Variable Index	
Style CEM-V-4 (R and B), CEM-V2-5R	315
Style CEM-HPDE-5, CEM-EMS (-3 and -5)	316
Style CEM-AM (2 and 3)	317
Style CEM-R (S and A)	318
Operating Parameters, General Purpose	316
Regrinding End Mills	320

End Mill Nomenclature

An end mill is a straight or tapered shank milling cutter which extends or projects, unobstructed, from the milling machine spindle. It is one of the most versatile of cutting tools, capable of milling, drilling, reaming, planing, shaping, contour cutting, and more. Improvements in cutting efficiency, through both design and material changes, have increased the usage of this style tool over time.

Axial Relief

The relief measured in the axial direction between a plane perpendicular to the axis at the cutting edge and the relieved surface.

Clearance (Secondary Relief)

The additional space provided behind the relieved land to eliminate undesirable contact between the mill and work piece.

Cutting Edge

The leading edge of the cutter tooth.

Flute

The chip space between the back of one tooth and the face of the following tooth.

Gash

Secondary cuts on a mill to provide chip room.


Hand of Cut

Right Hand, RH: When viewed from the cutting end of the mill, a counterclockwise rotation of the end mill is required in order to cut. Most end mills are right hand.

Left Hand, LH: When viewed from the cutting end of mill, a clockwise rotation of mill is required to cut.

Heel

The back edge of the relieved land.

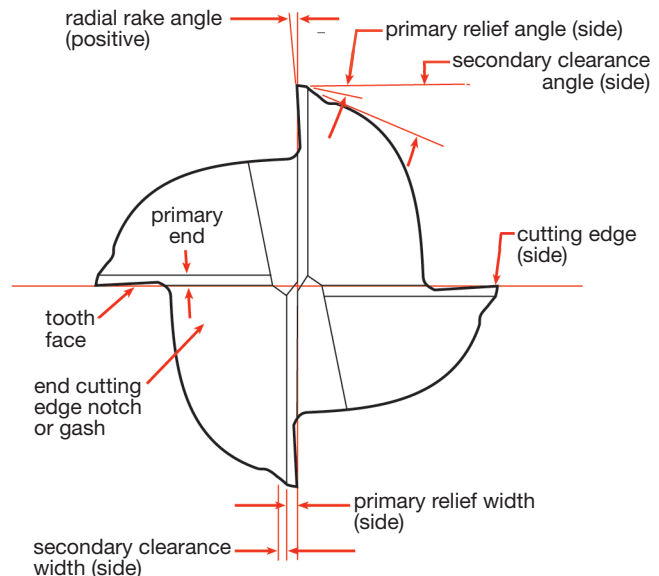

Helix Angle

The cutting edge angle which a helical cutting edge makes with a plane containing the axis of a cylindrical mill. When viewed from the cutter end of the mill, the flute will move clockwise for a right hand helix.

Helical Rake

The helical rake at a given point on the flute face is the angle between the tool axis and a tangent plane at the given point.

Hook

A concave condition of a tooth face. The rake of a hooked tooth face must be determined at a given point.

Land

Used to define the width of a specified surface.

Length of Cut

The effective axial length of the peripheral cutting edge which has been relieved to cut

Primary Relief

The relief measured in the axial direction between a plane perpendicular to the axis at the cutting edge and the relieved surface.

Primary Relief

The relief immediately behind the cutting edge.

Rake

The angular relationship between the tooth face or a tangent to the tooth face at a given point and a reference plane or line.

Radial Rake

The angle between the tooth face and a radial line passing through the cutting edge in a plane perpendicular to the cutting axis.

Relief

The result of the removal of tool material behind or adjacent to the cutting edge to provide clearance and prevent rubbing.

Relief Angle



The angle formed between a relieved surface and a given plane tangent to the axis at the cutting edge or to a point on the cutting edge.

Shank

The projecting portion of a cutter which locates and drives the cutter from the machine spindle.

Tooth Face

The surface of the tooth on which the chip impinges.

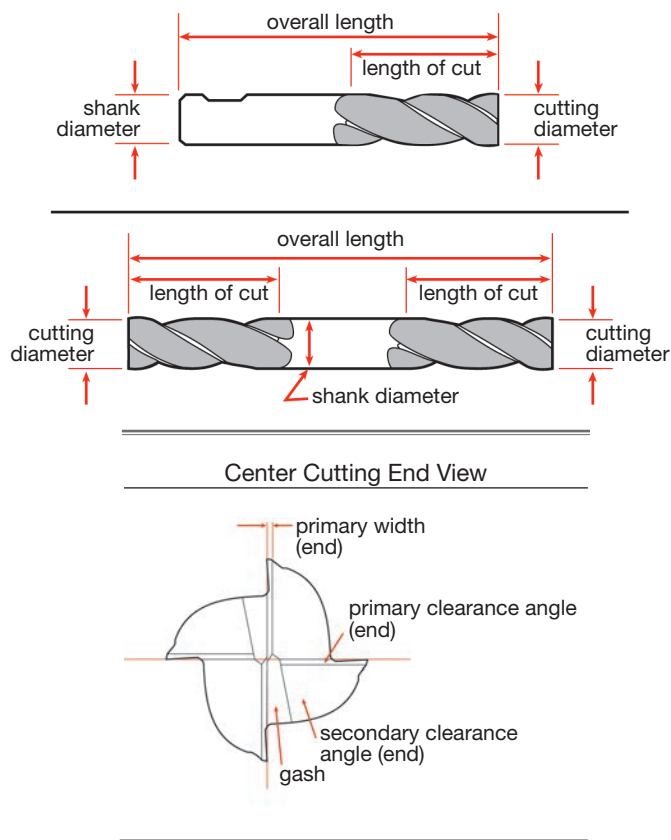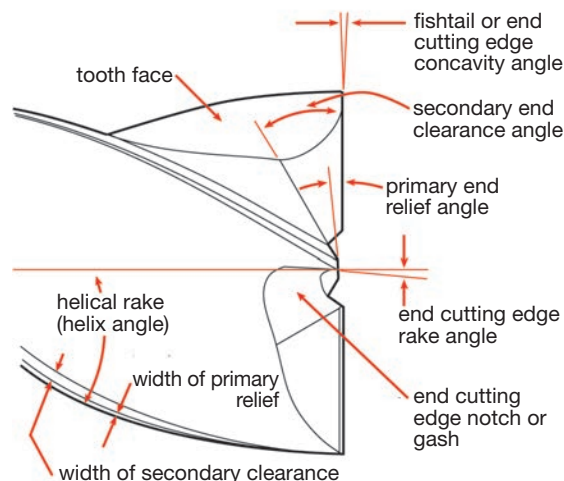

End Mill Finishes and Their Applications

Cleveland's cutting tools with TiN or TiCN coatings provide exceptional performance benefits. Coatings are matched with designs which are intended for aggressive material removal with significant increases in tool life and machining rates.

- Coatings reduce heat and abrasion to increase tool life.
- The increased lubricity of the coating surface reduces material adhesion and built-up edge, enabling even higher feed rates.
- Coatings reduce the amount of torque required for machining to allow more efficient use of equipment.
- Increase machining speeds to achieve optimum performance when using Cleveland coatings.
- **Straw finish**
 - bronze color
 - for general machining
 - operate at conventional cobalt speeds and heavier feed rates.
- **TiN (titanium nitride) coating**
 - gold color
 - intended for aggressive machining
 - increase machining speed 25% to 30% versus bright speeds
- **TiCN (titanium carbonitride) coating**
 - blue-gray color
 - for very aggressive machining of stainless steels and non-ferrous materials
 - extremely hard, wear resistant
 - increase machining speeds 35% to 50% versus bright speeds
- **TiAlN (titanium aluminum nitride) coating**
 - violet/blue-gray color
 - for aggressive machining of stainless steels, high alloy carbon steels, nickel-based high-temperature alloys, and titanium alloys
 - increase machining speeds 75% to 100% versus bright speeds.

TECH TIP

Reducing Vibration & Chatter: When chatter arises it tends to be self-sustaining until the problem is corrected. This condition causes poor finish on the part and will damage and significantly reduce the life of end mills. Carbide end mills are peculiarly susceptible to damage.

A common source of chatter is the machining of corners. As the end mills enters the corner the percentage of engagement increases the number of teeth in the cut. This drastically increases the cutting forces, causing chatter. Using circular interpolation and producing a bigger corner radius than the part print calls for and then going back and removing the remaining stock with a smaller end mill using circular interpolation will reduce the tendency to chatter.

When experiencing chatter problems, the basic reflex action is the reduction of cutting forces. This can be done by:

- (1) Reducing the number of flutes.
 - (2) Decreasing the chip load per tooth by reducing the feed or increasing the speed or RPM.
 - (3) Reducing the axial or radial depth of cut.
- Even though these steps can and will reduce chatter, slowing down the cutting process is not always the best course of action and reducing the chip load can be detrimental to the cutter.

Better first steps are to improve rigidity and stability:

- (1) Use a larger end mill with a larger core diameter.
- (2) Use end mills with reduced clearance or a small circular margin.
- (3) Use the shortest overhang from spindle nose to tip of tool.
- (4) Use stub length end mills where possible.
- (5) Use balanced tool holders.
- (6) Rework fixture to hold the work piece more securely.
- (7) Reprogram the cutter path shifting cutting forces into stiffer portions of the work piece.
- (8) Look for sweet spots in spindle speeds then adjust feed accordingly.

Speeds and Feeds

Speeds and feeds are the most important factors to consider for best results in milling. Improper feeds and speeds often cause low production, poor work quality, and unnecessary damage to the cutter. Too high a speed or too light a feed leads to rapid wear and dulling of the cutter, reducing tool life.

In milling, **speed** is measured in peripheral feet per minute. Oftentimes, speed is referred to as cutting speed, surface speed, or peripheral speed. The relationship of peripheral speed to the diameter of the end mill and the rotational speed of the machine spindle are indicated in the table on page 201.

Feed is normally measured and stated in inches per minute (IPM). It is, as shown on page 201, the product of the number of cutting teeth in the end mill x the feed per tooth x the revolutions per minute. In establishing operating conditions, all feed rates should be calculated from the chip load or feed per tooth. The individual cutting tooth must be able to sustain the load or feed applied to it without fracturing, regardless of the number of teeth in the mill. Because feed per tooth affects thickness, it is a very important factor in tool life.

The highest possible feed per tooth will usually give longer tool life between grinds and greater production per grind. Excessive feeds may overload the mill teeth and cause breakage or chipping of the cutting edge. Reasonable safe starting feeds for end mills under 0.5000" diameter will range from 0.0002 to 0.002 inches per tooth. For end mills equal to or greater than 0.5000" diameter, starting feeds will range from 0.002 to 0.003 inches per tooth.

Milling Corrective Actions

Trouble	Corrective Action
lack of rigidity	increase speed, decrease feed
excessive abrasion of the tool	decrease speed, increase feed
chipping of the cutting edge	decrease feed per tooth
burning of the cutting edge	decrease speed
chatter	use other combinations of speed and feed

Starting Points

All recommended speeds and feeds are suggested starting points. These may be increased or decreased depending upon variables, such as finish desired, condition of the milling machine, magnitude of the cut, rigidity of the part, use of coolant, power available, etc. Consider these points when choosing starting speeds and feeds.

Adjusting Starting Speeds and Feeds

Speed Adjustments

Use lower speeds for:	Use higher speeds for:
hard materials	softer materials
tough materials	better finishes
abrasive materials	small diameter mills
heavy cuts	light cuts
minimum tool wear	frail work piece or set-ups
maximum mill life	maximum production rates
	non metallics

Feed Adjustments

Use higher feeds for:	Use lighter feeds for:
heavy roughing cuts	light and finishing cuts
rigid set-ups	frail set-ups
easy to machine work materials	hard to machine work materials
rugged heavy duty mills	deep slots
high tensile strength materials	frail and small diameter mills
coarse tooth mills	low tensile strength materials
abrasive materials	

To Find...	Known Values	Formulae
peripheral cutting speed – SFM	mill diameter, D rotational speed RPM	$SFM = 0.262 \times RPM \times D$ $SFM \text{ estimated} = (RPM \times D) / 4$
rotational speed – RPM	peripheral cutting speed, SFM mill diameter, D	$RPM = SFM / (0.262 \times D)$ $RPM \text{ estimated} = (4 \times SFM) / D$
machine feed rate - IPM	rotational speed, RPM number of flutes (Teeth), T feed per tooth, IPT	$IPM = T \times IPT \times RPM$
feed per tooth - IPT	machine feed rate, IPM rotational speed, RPM number of teeth, T	$IPT = IPM / (RPM \times T)$
feed per revolution - IPR	machine feed rate, IPM	$IPR = IPM / RPM$
cutting power input - HP	width of cut, WOC depth of cut, DOC machine feed rate, IPM workpiece material power constant, K	$HP = WOC \times DOC \times IPM \times K$

Power Constants* for Use in Power Calculations

Work Material	K (Constant)	Work Material	K (Constant)	Work Material	K (Constant)
Aluminum	0.3	High Temp. Alloys		High Tensile Alloys	
Magnesium	0.3	Ferritic	1.7	180,000 - 220,000 psi	2.0
Copper	0.5	Austenitic	2.0	220,000 - 260,000 psi	2.5
Brass	0.4	Nickel Base	2.5	260,000 - 300,000 psi	3.3
Bronze	0.5	Cobalt Base	2.5	Titanium	
Cast Irons		Steel		under 100,000 psi	1.3
Ferritic	0.7	up to 150 Brinell	1.4	100,000 - 135,000 psi	1.7
Pearlitic	1.0	up to 300 Brinell	1.7	135,000 psi & over	2.5
Chilled	1.7	up to 400 Brinell	2.0	Stainless Steel	
Malleable Iron	1.0	up to 500 Brinell	2.5	Free Machining	1.0
				Others	1.7

*Horsepower required to remove one cubic inch of material per minute assuming a 60% power efficiency at the spindle nose and a 25% allowance for dulling of the end mill.

Definition of Symbols and Measurement Units

Attribute	Symbol	Measurement Unit
cutting speed	SFM	surface feet per minute
rotational speed	RPM	revolutions per minute
end mill diameter	D	inches
feed per tooth	IPT	inches per tooth
machine feed rate	IPM	inches per minute
feed per revolution	IPR	inches per revolution
cutting power input	HP	horsepower
power constant	K	horsepower/cubic inch/ minute
width of cut	WOC	inches
depth of cut	DOC	inches
number of teeth	T	—

Technical Information
Speed and Feed Data in Selected Materials – Regular HSS and Cobalt HSS End Mills

Material	Heat-Resistant Cobalt Base Alloys, High Tensile Steels (50-55C)	Heat-Resistant Austenitic Alloys, High Tensile Steels (46-50C)	Heat-Resistant Nickel Base Alloys, High Strength Stainless Steels, High Strength Titanium Alloys	High Strength Stainless Steels, High Tensile Steels (40-46C) Medium Strength Titanium Alloys	Heat-Resistant Ferritic Base Alloys, Medium Strength Stainless Steels, Unalloyed Titanium Tool Steels (30-40C)
End Mill Style	Cobalt HSS HSS 2 or more flute	Cobalt HSS HSS 2 or more flute	Cobalt HSS HSS 2 or more flute	Cobalt HSS HSS 2 or more flute	HSS 2 or more flute
Speed <i>all diameters</i>	5-10 SFM	10-15 SFM	15-20 SFM	20-40 SFM	40-60 SFM (all diameters)

mill diameter	Speed RPM	Feed Chip Load per tooth	Speed RPM	Feed Chip Load per tooth	Speed RPM	Feed Chip Load per tooth	Speed RPM	Feed Chip Load per tooth	Speed RPM	Feed Chip Load per tooth
1/16	*	*	*	*	*	*	1222-2444	.0002-.0005	2444-3667	.0002-.0005
3/32	*	*	*	*	611-815	.0002-.0005	815-1629	.0002-.0005	1629-2750	.0002-.0005
1/8	*	*	*	*	456-611	.0002-.0005	611-1222	.0002-.0005	1222-1833	.0002-.0005
3/16	*	*	204-306	.0002-.0005	306-407	.0002-.0005	407-815	.0002-.0005	815-1222	.0002-.0005
1/4	76-153	.0002-.0010	153-230	.0002-.0010	229-306	.0002-.0010	306-611	.0002-.0010	611-917	.0002-.0010
5/16	61-122	.0002-.0010	122-183	.0002-.0010	183-244	.0002-.0010	244-489	.0002-.0010	489-733	.0002-.0010
3/8	51-102	.0002-.0010	102-153	.0002-.0010	153-203	.0002-.0010	203-407	.0005-.0020	407-611	.0005-.0020
7/16	44-88	.0005-.0010	88-132	.0005-.0010	131-175	.0005-.0020	175-349	.0005-.0020	349-524	.0005-.0020
1/2	38-76	.0005-.0010	76-115	.0005-.0010	115-153	.0005-.0020	153-306	.0005-.0030	306-458	.0010-.0030
9/16	34-68	.0005-.0020	68-104	.0005-.0020	104-136	.0005-.0020	136-272	.0005-.0030	272-412	.0010-.0030
3/8	31-61	.0005-.0020	61-92	.0005-.0020	92-122	.0005-.0020	122-244	.0010-.0040	244-367	.0010-.0040
11/16	28-56	.0005-.0020	56-84	.0005-.0020	84-111	.0005-.0020	111-222	.0010-.0040	222-337	.0010-.0040
3/4	26-51	.0005-.0020	51-76	.0005-.0020	76-102	.0010-.0040	102-203	.0010-.0040	203-306	.0010-.0040
13/16	24-47	.0010-.0030	47-71	.0010-.0030	71-94	.0010-.0040	94-189	.0010-.0040	189-284	.0010-.0040
7/8	22-44	.0010-.0030	44-65	.0010-.0030	65-87	.0010-.0040	87-175	.0010-.0040	175-262	.0020-.0060
15/16	20-40	.0010-.0030	40-62	.0010-.0030	62-81	.0010-.0040	81-163	.0010-.0040	163-246	.0020-.0060
1	19-38	.0010-.0030	38-58	.0010-.0030	58-76	.0010-.0040	76-153	.0020-.0060	153-229	.0020-.0060
1-1/8	34	.0015-.0040	34-51	.0015-.0040	51-68	.0015-.0050	68-136	.0020-.0060	136-204	.0020-.0060
1-1/4	31	.0015-.0040	31-46	.0015-.0040	46-61	.0015-.0050	61-122	.0020-.0060	122-183	.0020-.0060
1-3/8	28	.0015-.0040	28-42	.0015-.0040	42-55	.0015-.0050	55-111	.0020-.0060	111-167	.0030 +
1-1/2	26	.0015-.0040	26-38	.0015-.0040	38-51	.0020 +	51-102	.0030 +	102-153	.0030 +
1-5/8	24	.0020 +	35	.0020 +	35-47	.0020 +	47-94	.0030 +	94-141	.0030 +
1-3/4	22	.0020 +	32	.0020 +	32-43	.0020 +	43-87	.0030 +	87-131	.0030 +
1-7/8	20	.0020 +	30	.0020 +	30-40	.0030 +	40-81	.0030 +	81-122	.0030 +
2	19	.0020 +	29	.0030 +	29-38	.0030 +	38-76	.0030 +	76-115	.0030 +
2-1/8	18	.0030 +	28	.0030 +	36	.0030 +	36-72	.0030 +	72-108	.0030 +
2-1/4	17	.0030 +	26	.0030 +	34	.0030 +	34-68	.0030 +	68-102	.0030 +
2-3/8	16	.0030 +	25	.0030 +	32	.0030 +	32-64	.0030 +	64-97	.0030 +
2-1/2	15	.0030 +	23	.0030 +	30	.0030 +	30-61	.0030 +	61-92	.0030 +
2-5/8	15	.0030 +	22	.0030 +	29	.0030 +	29-58	.0030 +	58-88	.0030 +
2-3/4	14	.0030 +	21	.0030 +	28	.0030 +	28-56	.0030 +	56-83	.0030 +
2-7/8	14	.0030 +	20	.0030 +	27	.0030 +	27-53	.0030 +	53-80	.0030 +
3	13	.0030 +	19	.0030 +	26	.0030 +	26-51	.0030 +	51-76	.0030 +

* For small diameter applications in materials harder than 46C consult Cleveland Technical Support.

Technical Information

Speed and Feed Data in Selected Materials – Regular HSS and Cobalt HSS End Mills (continued)

Material	Machine Steel Hard Brass & Bronze Electrolytic Copper Mild Steel Forming	Cast Iron Mild Steel Half-Hard Brass and Bronze	Brass and Bronze Alloyed Aluminum Abrasive Plastics	Aluminum Plastics Wood
End Mill Style	HSS 2 or more flute	HSS surface treatment helpful in cast iron 2 or more flute	High Helix HSS 1 to 6 flutes	High Helix HSS 1 to 6 flutes
Speed <i>all diameters</i>	60-80 SFM	800-100 SFM	100-200 SFM	200-600 SFM

mill diameter	Speed RPM	Feed Chip Load per tooth	Speed RPM	Feed Chip Load per tooth	Speed RPM	Feed Chip Load per tooth	Speed RPM	Feed Chip Load per tooth
1/16	3667-4888	.0002-.0005	4888-6111	.0002-.0005	6111-12222	.0002-.0005	12222 +	.0002-.0005
3/32	2750-3259	.0002-.0005	3259-4073	.0002-.0005	4073-8146	.0002-.0005	8146 +	.0002-.0005
1/8	1833-2440	.0002-.0010	2440-3056	.0002-.0010	3056-6112	.0002-.0010	6112 +	.0002-.0010
3/16	1222-1625	.0002-.0010	1625-2037	.0002-.0010	2037-4074	.0002-.0010	4074-12222	.0002-.0010
1/4	917-1222	.0005-.0020	1222-1528	.0005-.0020	1528-3056	.0005-.0020	3056-9168	.0005-.0020
5/16	733-978	.0005-.0020	978-1222	.0005-.0020	1222-2444	.0005-.0020	2444-7332	.0005-.0020
3/8	611-815	.0010-.0030	815-1019	.0010-.0030	1019-2038	.0005-.0030	2038-6114	.0005-.0020
7/16	524-698	.0010-.0030	698-873	.0010-.0030	873-1746	.0005-.0030	1746-5238	.0005-.0020
1/2	458-611	.0010-.0030	611-764	.0010-.0030	764-1528	.0005-.0030	1528-4584	.0005-.0020
9/16	412-543	.0010-.0040	543-678	.0010-.0040	678-1356	.0005-.0040	1356-4071	.0005-.0030
3/8	367-489	.0010-.0040	489-611	.0010-.0040	611-1222	.0005-.0040	1222-3666	.0005-.0030
11/16	337-444	.0010-.0040	444-555	.0010-.0040	555-1110	.0005-.0040	1110-3330	.0005-.0030
3/4	306-407	.0010-.0040	407-509	.0020-.0060	509-1018	.0010-.0060	1018-3054	.0010-.0040
13/16	284-379	.0020-.0060	379-469	.0020-.0060	469-938	.0010-.0060	938-2814	.0010-.0040
7/8	262-349	.0020-.0060	349-436	.0020-.0060	436-872	.0010-.0060	872-2616	.0010-.0040
15/16	246-326	.0020-.0060	326-407	.0020-.0060	407-814	.0010-.0060	814-2442	.0010-.0040
1	229-306	.0020-.0060	306-382	.0020-.0060	382-764	.0020 +	764-2292	.0020 +
1-1/8	204-272	.0020-.0060	272-340	.0030 +	340-680	.0020 +	680-2040	.0020 +
1-1/4	183-244	.0030 +	244-306	.0030 +	306-612	.0020 +	612-1836	.0020 +
1-3/8	167-222	.0030 +	222-278	.0030 +	278-556	.0020 +	556-1668	.0020 +
1-1/2	153-204	.0030 +	204-255	.0030 +	255-510	.0030 +	510-1530	.0020 +
1-5/8	141-188	.0030 +	188-235	.0030 +	235-470	.0030 +	470-1410	.0020 +
1-3/4	131-175	.0030 +	175-218	.0030 +	218-436	.0030 +	436-1308	.0020 +
1-7/8	122-163	.0030 +	163-204	.0030 +	201-408	.0030 +	408-1224	.0030 +
2	115-153	.0030 +	153-191	.0030 +	191-382	.0030 +	382-1146	.0030 +
2-1/8	108-144	.0030 +	144-179	.0030 +	179-358	.0030 +	358-1074	.0030 +
2-1/4	102-136	.0030 +	136-170	.0030 +	170-340	.0030 +	340-1020	.0030 +
2-3/8	97-128	.0030 +	128-161	.0030 +	161-322	.0030 +	322-966	.0030 +
2-1/2	92-122	.0030 +	122-153	.0030 +	153-306	.0030 +	306-918	.0030 +
2-5/8	88-116	.0030 +	116-145	.0030 +	145-290	.0030 +	290-870	.0030 +
2-3/4	83-111	.0030 +	111-139	.0030 +	139-278	.0030 +	278-834	.0030 +
2-7/8	80-106	.0030 +	106-132	.0030 +	132-264	.0030 +	264-792	.0030 +
3	76-102	.0030 +	102-127	.0030 +	127-254	.0030 +	254-762	.0030 +

Technical Information
Operating Parameters
 Powdered Metal, HSS & Cobalt

Speed and Feed Data in Selected Materials – PM Plus™ Powder Metal End Mills

Material	Hardness	Surface Feet per Minute SFM				Chip Load Per Tooth by Cutting Diameter			
	BHN	Bright	TiN	TiCN	TiAlN	1/8"	1/4"	1/2"	1"
Titanium	300	60-75	75-94	90-113	120-150	.0015	.0025	.0050	.0070
Annealed Alloys	340	30-45	38-56	45-68	60-90	.0010	.0020	.0040	.0060
Sol. Trtd. & Aged	400	15-30	19-38	23-45	30-60	.0007	.0015	.0020	.0040
High Temp. Alloys	300	30-45	38-56	45-68	60-90	.0020	.0025	.0040	.0060
Inconel, Monel, Hastelloy	400	10-24	13-30	15-36	20-48	.0015	.0020	.0030	.0050
Tool Steels	370	40-55	50-69	60-83	80-110	.0005	.0007	.0012	.0020
Tool Steels	450	20-30	25-38	30-45	40-60	.0003	.0005	.0007	.0010
Free Machining Steel	200	90-120	113-150	135-180	180-240	.0010	.0020	.0040	.0060
Alloyed & UnAlloyed	275	75-90	94-113	90-135	150-180	.0007	.0012	.0030	.0050
Alloy Steels - Med. to Hard	400	40-50	50-63	60-75	80-100	.0010	.0015	.0020	.0040
Stainless Steel									
Work Hardening	Various	55-75	69-94	83-113	110-150	.0005	.0007	.0012	.0020
Precipitation Hardening	Various	35-50	44-63	53-75	70-100	.0005	.0007	.0012	.0020
Copper Alloys									
Long Chip	Various	250-500	313-625	375-750	500-1000	.0050	.0025	.0050	.0080
Short Chip	250	180-240	225-300	270-360	360-480	.0010	.0020	.0040	.0060
Aluminum, Soft Gummy		750	938	1125	1500	.0020	.0030	.0060	.0100
Heat Treated Aluminum Alloys	Various	1000	1250	1500	2000	.0020	.0030	.0060	.0100
Aircraft Alloys									

Speed and Feed Data in Selected Materials – PM Plus and Cobalt HSS Roughing End Mills

	Surface Feet per Minute SFM			Chip Load Per Tooth by Cutting Diameter			
	Bright	TiCN	TiAlN	1/4"	1/2"	3/4"	1"
Coarse Profile Cobalt Roughers							
Steel < 20 HRc	98	230	262	.0006	.0022	.0033	.0039
Steels 20-30 HRc	82	180	197	.0005	.0019	.0032	.0039
Cast iron	82	180	197	.0005	.0019	.0032	.0039

Fine Profile Cobalt Roughers							
Steel < 20 HRc	96	230	295	.0006	.0021	.0031	.0043
Steels 20-30 HRc	82	131	246	.0005	.0019	.0028	.0038
Steels 32-40 HRc	49	131	147	.0005	.0016	.0024	.0031
Stainless Steels	33	82	115	.0004	.0016	.0024	.0031
Titanium > 40 HRc	33	82	82	.0004	.0016	.0024	.0031

PM Roughers							
Steels < 32 HRc	59	157	180	.0005	.0019	.0032	.0033
Steels 32-42 HRc	49	98	157	.0006	.0017	.0029	.0034
Cast Iron < 180 HR	59	157	180	.0005	.0019	.0032	.0033
Cast Iron > 180 HR	49	98	157	.0006	.0017	.0029	.0034
Stainless Steels	39	72	98	.0005	.0016	.0028	.0031
Titanium > 40 HRc	32	59	82	.0004	.0016	.0028	.0030
High-Temp Alloys	22	36	49	.0006	.0017	.0029	.0034

	Surface Feet per Minute SFM		Chip Load Per Tooth by Cutting Diameter				
	Bright	TiCN	1/8"	1/4"	1/2"	1"	2"
Aluminum, soft/gummy	250-500	400-2500	.005"	.007"	.010"	.012"	.015"
Aluminum alloys < 10% silicon	250-750	500-3250	.005"	.007"	.010"	.012"	.015"
Aluminum alloys > 10% silicon	N/R	N/R	N/R	N/R	N/R	N/R	N/R
Copper alloys, long chipping	250-500	350-1500	.005"	.007"	.009"	.012"	.015"
Copper alloys, short chipping	150-250	200-1250	.003"	.006"	.008"	.010"	.013"

*for Style 538, .010" is recommended.

Note: All the speeds and feeds shown are suggested starting points. They may be increased or decreased, dependent upon such variables as finish desired, condition of milling machine, magnitude of cut, coolant, etc. In many cases they may be increased slightly. The above speeds and feeds are applicable for slotting cuts, one (1) diameter deep. For deeper slotting cuts or cavity applications, feeds should be decreased.

Choosing the correct tool material

Cleveland end mills are available in a variety of tool materials: regular high speed steel, premium cobalt high speed steel, and PM/Plus powder metal cobalt high speed steel for higher production rates. The choice of tool material will depend on the following factors:

- Machinability of the workpiece
- Hardness and structure of the workpiece
- Shape and conditions of the workpiece
- Number of work pieces to be processed.

High speed steel end mills have low initial cost and general purpose versatility. End mills of high speed steel with cobalt have proven most effective in titanium alloys, alloy steels, Rc-40-50, high strength stainless steels, and thermal and heat resistant materials such as nickel or cobalt base alloys. PM/Plus end mills which use a special cobalt high speed steel coupled with a heat treatment and special mechanical designs, are capable of greater than normal feed rates and longer tool life in these same material groups.

Consider the number of flutes

To determine selection of either a two flute or a multiple flute end mill, several basics need to be considered.

- Type of cut
- Chip space required
- Production rate desired
- Surface finish required

Two fluted end mills have greater chip handling capacity than multiple fluted end mills. In order for an end mill to axially plunge-cut (drill), it must be manufactured as a center cutting tool. All two flute and multiple flute tools are available as center cutting end mills.

When two flute end mills and multiple flute end mills are run at the same feed rate (inches per minute), multiple flute end mills may produce finer finishes and longer tool life than two flute end mills, owing to a lighter chip load per tooth. Some caution must be exercised to insure that the chip load does not become so light as to cause excessive wear. Generally for production runs where either a two flute or multiple flute end mill would be applicable, it is more economical to use the multiple flute end mill.

Roughing versus finishing end mills

Roughing end mills are designed to be used in a variety of materials and to remove more cubic inches of material in the same period of time than conventional end mills. In order to achieve these rates of material removal, as well as to obtain full tool life, the feed rates employed must be heavier than with conventional end mills.

Selection of cutting fluids

Coolants control the temperatures of the end mill and the work, and provide a lubricant between the end mill, the chip and the workpiece. The proper type and application of coolant will protect the end mill cutting edges from damage, prevent deformation of the work piece through overheating, and improve finish by allowing cool, clean chip formation and efficient chip disposal.

The theory that a copious flow of coolant (or even total immersion of the workpiece in the coolant) is the surest way to provide proper cooling and lubrication, is not necessarily true. Recent tests have shown that multiple streams or jets of coolant, directed at strategic locations of the end mill rotating in or against the work, have greater cooling effects than a slow-moving copious flow.


The optimum application of coolant is achieved by the use of coolant feeding end mills. These end mills are designed and manufactured to meet your specific need.

When using coolant, care should always be taken to insure that coolant lines are clean and free of obstructions, and that the coolant is both clean and free of fines.

No matter how well the cutting fluid is directed between the end mill and the work, a dull end mill will generate more heat than can be dissipated by adequate cooling. Proper cutting fluid application will protect a sharp cutting edge to insure maximum tool life per grind. An interrupted flow of cutting fluid can cause rapid damage to the cutting edges in a few revolutions of the end mill.

It is always wise to consult a cutting fluid supplier when experiencing problems of an unusual nature.

A cutting fluid or coolant is required when using high speed steel end mills for milling steel. For milling with high speed end mills, water emulsified cutting oil generally is considered the least expensive and most applicable coolant for nearly all materials except those that are milled dry. Some of the harder steel forgings and die steels may be milled with somewhat better results when mineral or lard oils, or sulfurized oils are used. Plastics and cast iron should be milled dry or with a jet of air, while aluminum and aluminum alloys are best milled with water emulsified cutting oil, either in a properly directed jet stream, or in a mist.

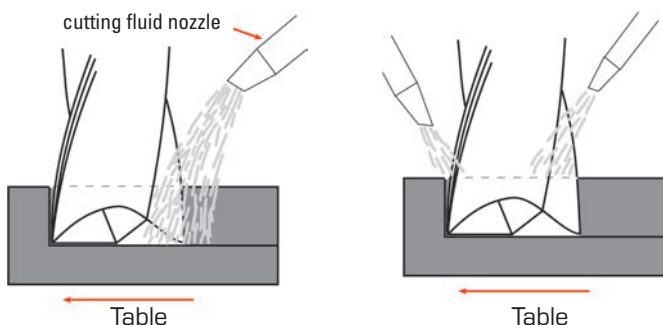

Technical Information
Operating Parameters
 Variable Index Style: **CEM-V-4***

*4R or 4B

Tolerances for Solid Carbide End Mills
Cutting Diameter: 1/32" through 1": +0.000 -0.002

Shank Diameter: h6

Formula: Regular and Stub Length

Side milling axial = 1.5 x D Side milling radial = 0.5 x D Slotting axial = 1 x D

Material	Speed sfm	feed per tooth (inches)								
		5/32	3/16	1/4	5/16	3/8	1/2	5/8	3/4	1
easy to cut stainless steel (303)	340	0.0010	0.0012	0.0016	0.0020	0.0024	0.0026	0.0028	0.0028	0.0030
moderately difficult to cut stainless (304)	290	0.0008	0.0010	0.0014	0.0018	0.0020	0.0022	0.0024	0.0026	0.0028
difficult to cut stainless steels (316L)	240	0.0006	0.0010	0.0012	0.0016	0.0018	0.0020	0.0022	0.0024	0.0024
soft steels (1020)	600	0.0010	0.0012	0.0016	0.0024	0.0024	0.0028	0.0030	0.0031	0.0039
titanium alpha beta alloys (Ti6Al4V)	200	0.0005	0.0006	0.0008	0.0012	0.0012	0.0016	0.0018	0.0020	0.0028
gray cast iron (GG)	600	0.0010	0.0012	0.0016	0.0024	0.0024	0.0028	0.0030	0.0031	0.0039

Formula: Long Length

Side milling axial = 1.3 x D Side milling radial = 0.2 - 0.3 x D Slotting axial = 0.3 - 0.5 x D

Material	Speed sfm	feed per tooth (inches)								
		5/32	3/16	1/4	5/16	3/8	1/2	5/8	3/4	1
easy to cut stainless steel (303)	340	0.0009	0.0011	0.0014	0.0018	0.0022	0.0023	0.0025	0.0025	0.0027
moderately difficult to cut stainless (304)	290	0.0007	0.0009	0.0013	0.0016	0.0018	0.0020	0.0022	0.0023	0.0025
difficult to cut stainless steels (316L)	240	0.0005	0.0009	0.0011	0.0014	0.0016	0.0018	0.0020	0.0022	0.0022
soft steels (1020)	600	0.0009	0.0011	0.0014	0.0022	0.0022	0.0025	0.0027	0.0028	0.0035
titanium alpha beta alloys (Ti6Al4V)	200	0.0005	0.0005	0.0007	0.0011	0.0011	0.0014	0.0016	0.0018	0.0025
gray cast iron (GG)	600	0.0009	0.0011	0.0014	0.0022	0.0022	0.0025	0.0027	0.0028	0.0035

Technical Information
Operating Parameters
 Variable Index Style: **CEM-V2-5R**
**ENHANCED
GEOMETRY**
Formula:

Side milling axial = 1.5 x D Side milling radial = 0.5 x D Slotting axial = 1 x D

Material	Speed sfm	chip load per tooth (inches)								
		3/16	1/4	5/16	3/8	1/2	5/8	3/4	1	
medium and high carbon steels >0.3% C	600-750	0.0015	0.0021	0.0023	0.0026	0.0028	0.0030	0.0031	0.0039	
alloy steels and tool steels <330HB, <35HRc	600-700	0.0011	0.0017	0.0020	0.0023	0.0028	0.0030	0.0031	0.0039	
alloy steels and tool steels 340-450 HB, 36-48 HRc	525-625	0.0010	0.0015	0.0016	0.0020	0.0028	0.0030	0.0031	0.0039	
austenitic stainless steel 302, 303, 304	350-445	0.0011	0.0017	0.0020	0.0023	0.0022	0.0024	0.0026	0.0028	
austenitic stainless steel 316, 316L	225-315	0.0009	0.0013	0.0016	0.0019	0.0020	0.0024	0.0024	0.0024	
austenitic stainless steel duplex	190-230	0.0008	0.0010	0.0014	0.0015	0.0020	0.0024	0.0024	0.0024	
cast iron, gray GG	520-660	0.0014	0.0022	0.0025	0.0030	0.0028	0.0030	0.0031	0.0039	
ductile and maleable cast iron CGI < 80 KSI	430-660	0.0009	0.0013	0.0018	0.0019	0.0028	0.0030	0.0031	0.0039	
nickel-based heat-resistant alloys	100-160	0.0004	0.0007	0.0011	0.0015	0.0016	0.0019	0.0023	0.0028	
alpha-beta titanium alloys Ti6Al4V	195-240	0.0008	0.0010	0.0014	0.0015	0.0016	0.0018	0.0020	0.0028	

Material	Hardness		Speed		Chip Load per Tooth		
	Brinell	HRC	Range	SFM	1/32" - 1/4"	1/4" - 1/2"	1/2" - 1"
low alloy steels	<220 HB	<19	Low High	600 750	.0005 .0010	.0010 .0020	.0020 .0030
medium alloy steels 01 to 07, W1 to W3, M1 to M3, T1 to T5, A2 to A3, S1 to S7, P2 to P3	225-286	20-30	Low High	600 750	.0003 .0005	.0005 .0010	.0010 .0015
high alloy steels M4 to M7, T6 to T15, D2 to D7, A4 to A7, P4	294-371	31-40	Low High	525 625	.0003 .0005	.0005 .0010	.0008 .0015
stainless steels 200/300 series	135-275	<28	Low High	250 350	.0005 .0010	.0010 .0020	.0020 .0030
stainless steels 400/500 series	135-330	<35	Low High	340 400	.0003 .0005	.0008 .0010	.0010 .0015
nickel-based alloys	140-475	<32-50	Low High	100 160	.0005 .0010	.0010 .0015	.0015 .0040
titanium alloys	110-450	<48	Low High	195 240	.0005 .0010	.0010 .0030	.0025 .0050
inconel	140-475	<48	Low High	100 160	.0005 .0010	.0010 .0015	.0015 .0030
aluminum, low silicon	—	—	Low High	800 1600	.0030 .0040	.0040 .0060	.0060 .0080

Higher values for surface speed should be used for radial depths of cut less than 25% of the diameter. Lower values for surface speed should be used for radial depths of cut greater than 25% of the diameter. The above recommendations are for axial lengths of cut not to exceed 1 times the cutter diameter for profiling and .5 times the diameter for slotting. Recommended speeds above are for uncoated tools only and should be adjusted when using

coated tools. Generally, speeds can be increased by the following factors: TiCN-coated tools – 20-25% increase; TiAlN-coated tools – 40-50% increase. The above speeds are a recommended starting point only. If the tool is working well, without vibrations or significant noise, increase the SFM in 5-10% increments. Ultimate speeds will depend upon setup conditions. Higher or lower parameters may be required to achieve optimum conditions.

Stainless Steel / Exotic Material

Applications:

- Designed for cutting applications involving excessive mechanical stress.
- Ideally suited for use in stainless steel and exotics such as hastalloy, waspalloy, and inconel.
- 3 flute square end for pocketing, slotting, or roughing.
- 3 flute ball nose gives enhanced surface finish in contour cutting and rapid chip removal in plunge cutting.
- 5 flute design for profiling and finishing applications.

Features and Benefits:

- Maximized strength due to increased cross-sectional area in the core and flute body.
- Combination of micro grain carbide substrate with high-performance coatings.
- Achieve 50% greater chip loads and 20% to 40% higher speeds than conventional end mills.

Formula:

$$\text{RPM} = (\text{SFM} \times 3.82) / \text{tool diameter}$$

$$\text{IPM} = \text{number of flutes} \times \text{RPM} \times \text{chip load per tooth}$$

Type of Cut	Aluminum Alloys 6061-T6, 7075-T6, 440, 356, 380, 61300	Depth of Cut % of Tool diameter	Speed sfm	End Mills Diameter Chip Load per Tooth					
				1/4"	3/8"	1/2"	5/8"	3/4"	1"
medium radial 1.0 x dia depth	< 32 HRC	30% x dia.	1200 +	.0045	.0071	.0100	.0123	.0149	.0200
	> 32 HRC	radial	600 +	.0036	.0057	.0080	.0098	.0119	.0160
heavy radial 1.0 x dia depth	< 32 HRC	50% x dia.	1200 +	.0036	.0057	.0080	.0098	.0119	.0160
medium radial 2.0 x dia depth	< 32 HRC	30% x dia.	1200 +	.0045	.0071	.0100	.0123	.0149	.0200
	> 32 HRC	radial	600+	.0036	.0057	.0080	.0098	.0119	.0160
heavy radial 2.0 x dia depth	< 32 HRC	50% x dia.	1200 +	.0036	.0057	.0080	.0098	.0119	.0160
finishing	< 32 HRC	< 25% of dia.	1200 +	.0045	.0071	.0100	.0123	.0149	.0200
medium radial	> 32 HRC		600 +	.0036	.0057	.0080	.0098	.0119	.0160
finishing	< 32HRC	< 10% of dia.	1200 +	.0045	.0071	.0100	.0123	.0149	.0200
light radial									
finishing	< 32 HRC	< .010 radial	1200 +	.0054	.0086	.0120	.0147	.0178	.0240
	> 32 HRC	depth	600+	.0045	.0071	.0100	.0123	.0149	.0200

This chart represents starting points based on a coated tool. Reduce rates up to 50% when using an uncoated tool.

These speed and feed rates are suggested as general guidelines. Machine type, horsepower, spindle speed limitations, toolholding and workholding devices all may

impact a cutting tool's ability to perform properly. Greenfield Industries is not responsible for tool failure, part damage, or injury that may be caused by following these general recommendations.

Applications:

- Delivers superior performance, providing increased tool life and improved part finish.
- Concentric margins stabilize the tool in the cut and reduce chatter at elevated speeds.
- Greater resistance to chipping with increased feed and speed rates over conventional carbide tools.
- Design incorporates rake enhancements in the flute for improved chip flow and higher feed rates at high and low spindle speeds.
- Tool design eliminates excess pressure that causes chip packing.

Aluminum and nonferrous material
Features and Benefits:

- 2 flute square end offers excellent performance in roughing and finishing, in ramp cutting and in plunging.
- 2 flute ball nose designed for contouring aluminum, copper, and other non-ferrous materials.
- 3 flute square end gives superior surface finishes without sacrificing metal removal rates in high-speed slotting, profiling, and ramping.

<i>Material</i>	Hardness		Hardness			Chip Load per Tooth	
	Brinell	HRc	Bright	TiCN	TiAlN	1/4" to 1/2"	1/2" - 1"
low and plain carbon, alloy, and tool steels	<220 HB	<19	–	325 - 500	430 - 575	.0015 - .0030	.0030 - .0045
plain carbon, alloy and tool steels	225 - 286	20 - 30	–	215 - 375	350 - 430	.0015 - .0030	.0030 - .0045
	294 - 371	31-40		180 - 280		.0011 - .0021	.0021 - .0032
austenitic stainless steels 200 and 300 series	135 - 275	<28	–	215 - 440	250 - 500	.0010 - .0025	.0025 - .0040
ferritic, martensitic, 400/500 series and PH stainless steels	135 - 330	<35	–	190 - 375	225 - 430	.0015 - .0030	.0030 - .0045
aluminum, low silicon and other non-ferrous alloys	50 -150	600	2000	2400 - 2500	–	.0020 - .0038	.0038 - .0077
aluminum, high silicon			600 - 2000	720 - 2500	–	.0018 - .0035	.0035 - .0071



Technical Information
Cutting Data
General Purpose Carbide

<i>Material</i>	Hardness		Surface feet per minute	Chip Load per Tooth									
	Brinell	HRC		1/16"	1/8"	3/16"	1/4"	5/16"	3/8"	1/2"	5/8"	3/4"	1"
low and plain carbon, alloy and tool steels	<220 HB	<19	Low 270	.0004	.0006	.0010	.0015	.0020	.0025	.0030	.0035	.0040	.0045
			High 360										
plain carbon, alloy, and tool steels	225-286	20-30	Low 180	.0004	.0006	.0010	.0015	.0020	.0025	.0030	.0035	.0040	.0045
			High 270										
	294-371	31-40	Low 135	.0003	.0004	.0007	.0011	.0014	.0018	.0021	.0025	.0028	.0032
			High 180										
austenitic stainless steels 200 and 300 series	135-275	<28	Low 180	.0002	.0004	.0006	.0010	.0015	.0020	.0025	.0030	.0035	.0040
			High 315										
ductile and malleable cast iron	120-320	<35	Low 160	.0003	.0004	.0007	.0011	.0014	.0018	.0021	.0025	.0028	.0032
			High 270										
cast iron (gray)	120-220	<18	Low 315	.0008	.0012	.0020	.0030	.0040	.0050	.0060	.0070	.0080	.0090
			High 450										
	220-320	19-34	Low 225	.0005	.0007	.0012	.0018	.0024	.0030	.0036	.0042	.0048	.0055
			High 315										
low-silicon aluminum & other non-ferrous alloys	50-150	—	Low 720	.0006	.0010	.0016	.0024	.0032	.0040	.0048	.0560	.0064	.0072
			High 900										
cobalt-based high-temperature alloys	150-425	<45	Low 30	.0004	.0006	.0010	.0015	.0020	.0025	.0030	.0035	.0040	.0045
			High 45										
nickel-based high-temperature alloys	140-300	<32	Low 45	.0002	.0004	.0006	.0009	.0012	.0015	.0018	.0021	.0024	.0027
			High 90										
	300-475	32-50	Low 40	.0002	.0004	.0006	.0009	.0012	.0015	.0018	.0021	.0024	.0027
			High 70										

Higher values for surface speed should be used for radial depths of cut less than 25% of the diameter. Lower values for surface speed should be used for radial depths of cut greater than 25% of the diameter.

The above recommendations are for axial lengths of cut not to exceed 1 times the cutter diameter for profiling and .5 times the diameter for slotting.

Recommended speeds above are for uncoated tools only and should be adjusted when using coated tools. Generally, speeds can be increased by the following factors:

- TiCN-coated tools – 20-25% increase
- TiAlN-coated tools – 40-50% increase

The above speeds are a recommended starting point only. If the tool is working well, without vibrations or significant noise, increase the SFM in 5-10% increments. Ultimate speeds will depend upon setup conditions. Higher or lower parameters may be required to achieve optimum conditions.

Applications

- Use in general milling applications in medium to low-carbon steels, cast iron, non-ferrous light metals, and plastics.
- Double-end end mills economically increase productivity.
- 2 flute end mills are generally used for plunging, slotting, and heavy peripheral cuts.
- 3 flute end mills provide a compromise between the chip clearance of a 2 flute tool and the rigidity and wear resistance of a 4 flute tool; especially useful for many slotting operations.
- 4 flute end mills are most commonly used in profiling and in harder materials; stiffer construction results in minimal deflection. They also provide good surface finishes and wear-resistant characteristics for excellent size control.

Features and Benefits:

- 10% cobalt submicron grain carbide substrate.
- 30° right-hand spiral, right-hand cut helix designed for maximum chip clearance.
- 2, 3, and 4 flute configurations available.
- Square end and ball nose end geometries available.
- Multiple lengths in select styles and sizes.
- TiAlN-coated tools available in most styles.

In every manufacturing plant today, large and small, an effective, organized end mill regrinding program is essential. No matter how large or small the end mill usage may be, an organized regrinding system will pay dividends in greater production per end mill.

General Information

End mills should be removed from the machine at the end of a predetermined production run, or when dull. If possible, a predetermined amount of stock should be removed on dull end mills (normal stock removal is .005" or .010" for each regrind) and color coding or size etching might be marked on the end mill to indicate its size. After several regrinds (this, too, can be predetermined) the end mill will tend to lose its effective rake angle and flute depth, and, at this point, the end mill must be scrapped.

Charts and data for the correct relief angles, relief widths, and rake angles for regrinding end mills are shown on pages 268 and 270.

After regrinding and inspection, all end mills should be dipped in rust-preventative oil, and, if suitable cartons are not available, they should be dipped in plastic coating for the full flute length. They should be stored in their original container, in separate bins or wooden containers. Small wooden containers that can be carried about are usually better than ordinary bin storage, as rough handling, in some cases, ruins more cutting edges than the actual milling operation.

The basic requirements for efficient end mill regrinding are:

- Tool grinding equipment in good condition.
- Adequate information for particular applications with reference to correct reliefs and rake angles.
- A workable tool conservation program.
- Adequate storage facilities and efficient handling techniques.

Nothing decreases the usable tool life of an end mill more than continued use of a dull end mill. The cutting action of a dull end mill is such that all the shearing qualities are gone and the material being milled is actually pushed on ahead of the individual cutting edges. This results in drawing the temper of the individual high-speed steel cutting edges, poorer finishes and accelerated wear. Continued use of a dull end mill makes it necessary to remove much more stock at regrinding to make the end mill usable once again. In the case of carbide end mills excessive dullness will chip and crater the cutting edges and will often cause breakage.

The point in the milling operation at which an end mill begins to dull can be determined in several ways. A dull end mill begins to spring or chatter, causes finishes to become poorer, and glazes or smears some materials. In addition, a wear land begins to form on the top of each individual cutting edge. Many milling machine operators can determine the first signs of end mill dulling by the sound of the cutting action, or by slight variations in machine vibrations.

Generally, an end mill is ready for resharpener when a wear land is visible on the top of the cutting edge. For smaller diameter end mills, and when milling some of the harder, ferrous materials, a wear land of approximately .005 may be used as an indication of the maximum allowable wear prior to resharpener. When using larger diameter end mills, and when milling in other classes of materials, a wider wear land may be used as an end point prior to regrinding.

In the final analysis, the many variables of each individual end mill application will determine the amount of cutting edge wear or degree of end mill dullness allowable before regrinding.

Regrinding Equipment

The tool cutter grinders on the market today are extremely versatile, and are capable of end mill regrinding between centers or off-the-shank. Tool and cutter grinders specifically designed for this type of work are easy to set up, operate and maintain, and versatile enough to regrind many types of cutting tools other than end mills. For a large volume of regrinding work some facilities utilize NC or CNC grinding equipment which maintains uniformity of reground mills at each regrinding.


Wheel Selection for Regrinding High Speed Steel (HSS) End Mills

Efficient end mill regrinding is possible without the necessity of stocking a large inventory of various wheel types. For general purpose regrinding, aluminum oxide wheels of 46 to 80 grit are usually satisfactory, although, for finer finishes finer grit wheels may be used. When using wheels with a grit finer than 80, and particularly when resharpener thin cutting edges, approximately .002" should be the maximum amount of stock removal. Heavier cuts than .002" with fine grit wheels usually cause wheel loading and cutting edge burning. CBN wheels are recommended for minimum heat generation and may allow greater stock removal on roughing operations.

Wheel Selection for HSS End Mills (continued)


Two basic types of wheels may be used: plain or cupped. The cutting edge sections shown below are those which will be produced on the end mill cutting edges by each of these wheels. For a conventional type of regrinding, cup-shaped wheels are often preferred. This preference is caused by the fact that regrinding with a plain wheel tends to leave a high heel portion on the cutting edge, which might cause drag. If the heel portion is too high, it must be cleared also, requiring an additional regrinding setup and operation. Then too, the relief ground on an end mill cutting edge with a cupped wheel is easier to measure, as this type of regrinding leaves a flat, angular relief.

Effect of Wheel Shape on End Mill Relief Angle
Cup Wheel versus Plain Wheel

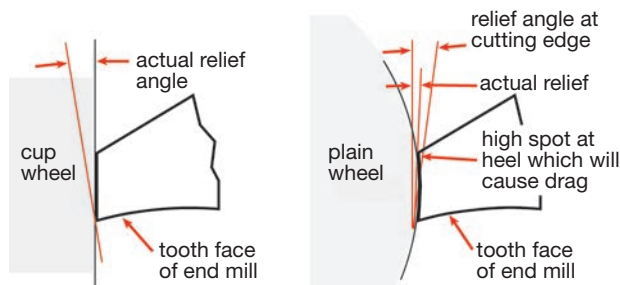

Regrinding the Sides

Producing the correct relief angle on an end mill is accomplished by establishing the proper location of the wheel and the end mill. On NC or CNC equipment, this relationship is established through use of a probe or other locating type device. On tool and cutter grinding equipment, a finger or flute rest is used as the locating device. The location of the flute finger should be such that it is mounted in proximity to the wheel. It must be adjustable but not attached to the table. The flute finger may be mounted on the table only when regrinding straight fluted end mills, and then its use is confined to that of an indexing finger.

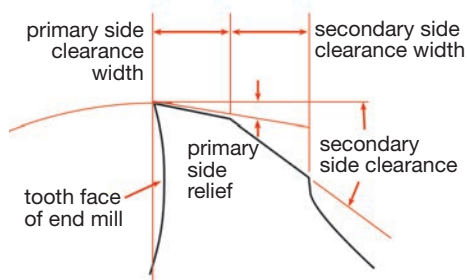

In actual regrinding, after the flute finger and wheel-to-flute location have been set, each flute is traversed past the wheel, taking a light cut and maintaining a steady motion. After the first light cut, the end mill should be measured to make certain that no taper is being added to the end mill. After the proper amounts of stock have been removed, to re-sharpen the end mill completely, a very light cut should be taken on all flutes, to make certain that roundness and concentricity is maintained.

In choosing the correct relief for the milling job at hand, it is best to regrind end mills to produce just enough primary relief to eliminate drag. Drag will cause friction and overheating of the cutting edges, and usually some buildup of the material on the heel of the primary relief. On the other hand, too much relief will cause the end mill to chatter and the cutting edges will tend to deteriorate rapidly. Too much relief is the least objectionable of the two choices, but the ideal situation is to have just enough relief. The amount of secondary clearance necessary is usually dependent on the size of the end mill, the width of the primary relief, and the feeds being used. For example, if the feed per tooth per revolution is .004", the heel of the secondary clearance must be at least .005" below the cutting edge. The table below lists the approximate side relief for various end mills.

The best re-sharpening procedure is to first regrind the primary relief until all of the wear has been removed, taking care to avoid excessive diameter loss. Next, the secondary clearance is ground to bring the primary relief land to the desired widths. After grinding the secondary clearance, it is often desirable that the primary relief surfaces be given a light finish grind to refine the cutting edges. To minimize runout, this light finishing cut should be made at one machine sitting, going completely around the end mill.

Side Relief Angles

	End Mill Diameter	Primary Clearance	Primary Width	Secondary Clearance Angle
HSS and Cobalt End Mills	1/8" - 1/4"	13° - 10°	.005" - .011"	26°
	1/2" - 3/4"	10° - 9°	.012" - .024"	17°
	1" - 2"	9° - 7°	.020" - .035"	15°
HSS High-Helix End Mills	1/8" - 1/4"	14°	.017" - .013"	27°
	1/2" - 3/4"	13° - 12°	.015" - .027"	21°
	1" - 2"	11° - 10°	.022" - .040"	18°
PM Plus	1/8" - 1/4"	22° - 18°	.004" - .013"	29°
Powder Metal End Mills	1/2" - 3/4"	16° - 12°	.010" - .018"	22°
	1" - 2"	11° - 10°	.015" - .030"	19°


Checking Relief Angles

The universally accepted method of checking relief angles on the sides of end mills is to mount the end mill to rotate about its axis. Position a dial indicator above or to the side of the end mill, (with the dial indicator finger at right angles to the axis of the end mill being checked) and measure the indicator drop in thousandths of an inch on the primary relief.

This method, shown in the illustration, may be used for any type of side relief, be it dish shaped, flat, or radial. The measurable width of primary relief may be any predetermined amount.

The table below shows the amount of indicator drop for various primary relief angles when the cutting edge of the end mill is moved or rotated the tabulated measured primary width.

Off-hand side relief regrinding of end mills for any milling application should never be done under any circumstance.



Regrinding the Ends

Regrinding of the ends of end mills does not differ too much from regrinding of the sides, in that the basic principles still apply. However the method of grinding varies in that nearly all regrinding is done off of the shank. The task at hand is to reproduce an end that may be center cutting, square end, ball nose or square end with a corner radius. Almost any of the tool or cutter grinders may be used to produce accurate regrinding and re-notching of the square end style and some are built to also permit accurate reproduction of ball and radius ends. NC or CNC equipment can be programmed to achieve all of the required end configurations during regrinding.

Whenever possible, end notching or gashing cuts should be produced with grinding wheels which have corner radii so as to reduce stress concentration at the bottom of the gash. End tooth notch angles should produce about 0° to 5° positive axial rake.

In re-sharpening of end teeth the first step is always the removal of the wear on the end teeth and at the corner intersection of the end and peripheral teeth. Particular care must be taken so that all of the corner wear is removed.

Once the wear has been removed, it then is a matter of using the proper set-up and wheel shapes to produce the desired center cutting end configuration capability. On center cutting end mills one or more teeth must be cleared to cut to or past center. A gash is normally provided on the center cutting teeth to aid chip removal and prevent chip packing in the center of the end mill.

Ball end mills present re-sharpening problems due to their relieved radius form and roughly spherical form of the secondary clearance. Most users will end up using a machine to generate the cleared form and then hand clear the secondary and trailing heel. Care must always be exercised in regrinding the ends regardless of their shape to avoid generating any chip pockets.

Primary relief land widths of end teeth will be approximately 1-1/2 to 3 times that recommended for peripheral teeth. The table on the next page is a listing of typical details for clearing the ends of end mills.

Primary end relief is usually increased for softer materials and decreased as the hardness of the work material increases or the machinability of the work material decreases. Primary end relief angles should also be increased on small diameter mills used for plunge-cutting.

continued on next page

Primary Relief Angle for Side Teeth of End Mills

End Mill Diameter	Measured Primary Relief Width	Indicator Drop in Measured Primary Relief Width					
		4°	6°	8°	10°	12°	15°
1/8	1/64	.0000	.0000	.0002	.0008	.0015	.0021
3/16	1/64	.0000	.0003	.0009	.0014	.0020	.0028
1/4	1/64	.0001	.0007	.0012	.0018	.0023	.0031
5/16	1/64	.0003	.0009	.0014	.0019	.0025	.0033
3/8	1/64	.0004	.0010	.0015	.0021	.0026	.0034
7/16	1/64	.0005	.0011	.0016	.0022	.0027	.0035
1/2	1/64	.0006	.0012	.0017	.0022	.0028	.0036
5/8	1/32	.0006	.0017	.0028	.0039	.0050	.0066
3/4	1/32	.0009	.0020	.0029	.0042	.0052	.0069
7/8	1/32	.0011	.0022	.0032	.0043	.0054	.0070
1	1/32	.0012	.0023	.0034	.0045	.0056	.0072
1-1/8	1/32	.0013	.0024	.0035	.0046	.0057	.0073
1-1/4	3/64	.0015	.0032	.0048	.0064	.0080	.0105
1-3/8	3/64	.0017	.0033	.0050	.0066	.0082	.0106
1-1/2	3/64	.0018	.0034	.0051	.0067	.0083	.0107
1-3/4	3/64	.0020	.0037	.0053	.0069	.0085	.0109
2	3/64	.0022	.0038	.0054	.0071	.0087	.0111
2-1/4	1/16	.0027	.0048	.0070	.0092	.0113	.0145
2-1/2	1/16	.0028	.0050	.0072	.0093	.0115	.0147
2-3/4	1/16	.0029	.0051	.0073	.0095	.0116	.0148
3	1/16	.0031	.0052	.0074	.0096	.0117	.0150

Regrinding the Ends (continued)

Primary end relief is usually increased for softer materials and decreased as the hardness of the work material increases or the machinability of the work material decreases. Primary end relief angles should also be increased on small diameter mills used for plunge-cutting.

Secondary End Clearance

Secondary end clearance depends on the material being milled and the type of operation. Some tracer milling operations, requiring comparatively heavy in-feeds, will necessitate additional secondary clearance, whereas shallow traversing cuts would require less secondary end clearance.

In addition, milling of the higher density steels require less secondary end clearance, but aluminum and other non-ferrous milling applications require increased secondary end clearances. In most cases, off hand grinding of secondary end clearances on end mills is the quickest and most economical method, as no absolute degree of accuracy is required. For combination notching and secondary end clearing of end mills, however, where the side of the wheel makes contact with the cutting face of one of the end teeth, care must be exercised, and some users prefer to notch and clear end teeth in one grinding operation, by machine.


End Relief Angles

	End Mill Diameter	Primary Clearance	Primary Width	Secondary Clearance Angle
HSS, Cobalt and PM Plus End Mills	1/8" - 1/4"	6° - 8°	.025" - .035"	25° - 30°
	1/2" - 3/4"	6° - 8°	.035" - .050"	25° - 30°
	1" - 2"	6° - 8°	.045" - .075"	25° - 30°
HSS	1/8" - 1/4"	8° - 10°	.025" - .045"	30°
High-Helix End Mills	1/2" - 3/4"	8° - 10°	.035" - .060"	23°
	1" - 2"	8° - 10°	.050" - .100"	23°

Regrinding End Mill Tooth Rake Angles

While correct relief angles on end mill teeth are essential for economical milling, too often little attention is given to maintaining the correct rake angles. Rake angles or hook angles are shown below.

As the illustration shows, the term rake is commonly used when referring to a comparatively straight cutting face. The rake or hook angle formed by the side cutting faces of an end mill is often referred to as radial rake.

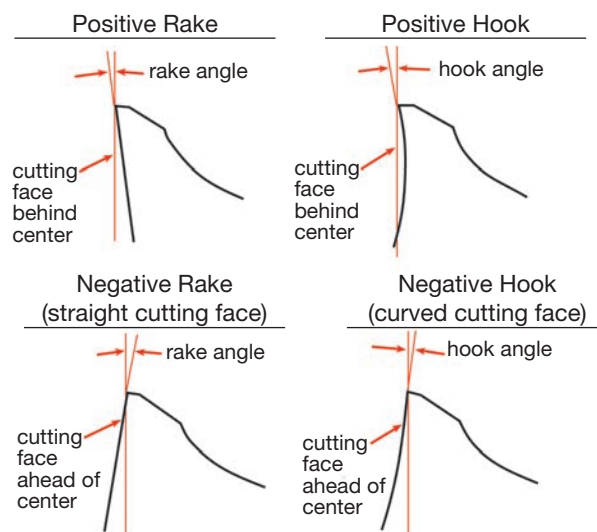

Most end mills are manufactured with a hook rather than a rake because the curved cutting face aids in curling and ejecting the chips. The proper rake angle is governed by the material being cut and the material from which the end mill is made. Most high-speed steel end mills usually have generous positive rake angles on the side cutting teeth, whereas tungsten carbide types of end mills are usually manufactured with lower positive or even negative rake angles. Softer materials usually will allow higher rake angles to be used, whereas the harder, tougher materials require lower rake angles.

Radial rake is not to be confused with axial or helical rake. Axial rake is that angle formed about the axis of the mill by a straight cutting edge at one given point, whereas helical rake is that helical angle formed around the axis of the mill by the cutting edge.

Axial rake is formed by a straight angular cutting edge, and is not constant, whereas helical rake is formed by a helical cutting edge and is constant. Helix angles or helical rake angles for end mills may range, from 0° up to 60°. For general purpose milling, helix angles of 25° to 35° are the most popular.

Regrinding Tooth Rake Angles (continued)

During manufacturing a specific radial rake is built into each end mill type based upon its intended area of work material application. As an end mill is reground on the outside diameter, there is a continual reduction in the radial rake present in the tool, resulting in higher cutting forces and generally shorter tool life. An end mill generally can only be reduced in cutting diameter by about 10% to 15% of the original diameter before the mill must be discarded or the correct radial rake reground into face of the flute.

Width of Tooth Face being Measured

rake angle	indicator drop in thousandths of an inch			
	1/32"	1/16"	3/32"	1/8"
1°	.0005	.0011	.0016	.0022
2°	.0011	.0022	.0034	.0044
3°	.0016	.0033	.0049	.0065
4°	.0022	.0044	.0066	.0087
5°	.0027	.0054	.0082	.0108
6°	.0033	.0065	.0099	.0131
7°	.0038	.0076	.0115	.0152
8°	.0044	.0087	.0132	.0174
9°	.0049	.0098	.0148	.0195
10°	.0055	.0109	.0165	.0217
11°	.0061	.0119	.0182	.0238
12°	.0066	.0130	.0200	.0260
15°	.0084	.0162	.0251	.0323
20°	.0114	.0227	.0341	.0455


Regrinding Radial Rake Angles

The practice of regrinding radial rake or hook angles on end mills of diameters below 1/2" is usually not economical, unless large quantities of the same size are involved. Thus the regrinding of radial rake is usually confined to end mills of larger sizes. There are three accurate methods of regrinding the rake angles in the helical flutes of an end mill.

1. Use of a tool room grinder with a spiral lead attachment.
2. Use of a fixture, mounted on a tool room grinder having a former (a bar grooved with the same lead as the end mill) which rotates the end mill at the correct helix angle as it moves forward into the grinding wheel.
3. Use of a properly programmed CNC grinder.

Inspecting Radial Rake Angles


The illustration shows one method of inspecting the radial hook or rake in the side tooth of an end mill, when the end mill is located in inspection centers or in an accurate horizontal spindle. This method measures the amount of rake of the tooth being measured in indicator drop. Convert this amount of indicator drop to the angular equivalent of the actual rake angle by reference to the table at left.

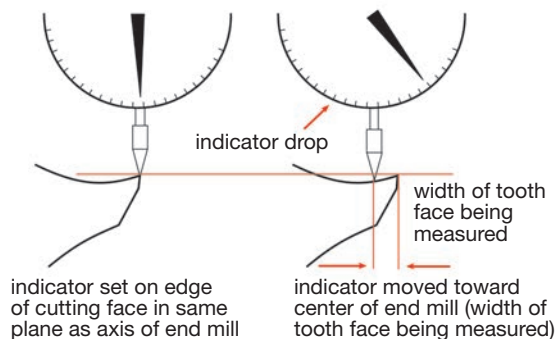**Sharpening Roughing End Mills**

Roughing end mills are designed as form-relieved cutters, and as such, the OD wear is removed by grinding the radial rake face of the teeth and fillet of the flute. Generally this is accomplished on a tool and cutter grinding machine. If a roughing end mill is center or end cutting, the end teeth are re-sharpened the same way as end teeth on standard end mills.

A saucer-shaped grinding wheel, dressed to match the form of the flute face from OD to the fillet, is used. The grinding head is turned to an angle 1° to 3° greater than the helix angle of the mill. This will allow the leading edge of the wheel to hollow grind the rake face. (Typically the finished hook is 8° to 12°).

A tooth support finger or lead-generating device may be used to ensure that the proper lead is maintained. The support finger rides on the back of the tooth being sharpened, located below the form. Unless equal stock is removed from each rake face, the re-sharpened mill will have more radial run-out during use. Normally this should not prove to be a problem, provided enough stock is left on the roughed out part for finishing.

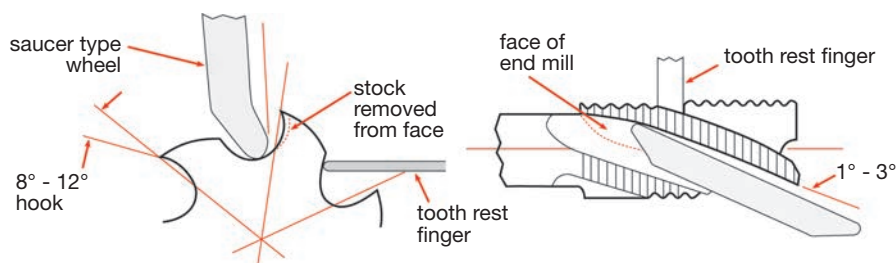


Other Tool Product Index. 325

TECH TIPS

- Use Screw Extractors to
Remove Broken Screws and Bolts. 326
- Ground Tool Bits. 327
- Drill and Reamer Blanks. 330

Other Tools

Other Tools						Tool Material				Application			
		Type	Style	Page	Set	HSS	Cobalt	Carbide	TCT	Steel	Stainless	Cast Iron	Non-Ferrous
Screw Extractor		Ezy-Out®	192	326	yes	•	•			•		•	
Tool Bits		Square	850	327		•	•			•	•	•	
		Square	855	327		•	•			•	•	•	
		Square	860	327		•	•			•	•	•	
		Square	3507	327		•	•			•	•	•	
		Rectangular	851	328		•	•			•	•	•	
		Rectangular	856	328		•	•			•	•	•	
		Rectangular	861	328		•	•			•	•	•	
		Rectangular	3517	328		•	•			•	•	•	
Cut-off Blades		General Purpose	852	329		•	•			•	•	•	
			857	329		•	•			•	•	•	
		Armstrong/Williams Holder	853	329		•	•			•	•	•	
			858	329		•	•			•	•	•	
Blanks		Oversize	902	330		•	•			•	•	•	
		Undersize	903	330		•	•			•	•	•	
Milling Cutter and Saws	     	Side Milling	305	331		•	•			•	•	•	
		Staggered Tooth	307	331		•	•			•	•	•	
		Woodruff Key Seat	321	331		•	•			•	•	•	
		Screw Slot	318	332		•	•			•	•	•	
		Plain Metal	326	332		•	•			•	•	•	
		Side Chip Clearance	327	333		•	•			•	•	•	
						•	•			•	•	•	
Metal Cases		Empty	400	333		•	•			•	•	•	

Material Icons

Material Reference	Icon Reference	P				M			K		N	S		H
Type		Steel (HRc)				Stainless Steel			Cast Iron (HRc)		Aluminum and Non-Ferrous	Hi-Temp Alloy		Hardened Steel (HRc)
Hardness		Low Carbon	Alloy			Austenitic	Martensitic	PH	Gray	Nodular		Ni, Co, Fe Based Super Alloy	Titanium	>45
		13-38	>38	16-38	> 38	300 Series	400 series		18-22	22-32				

Other Tools

Ezy-Out® Screw Extractor

Style: **192**



extractor number	small end (in)	large end (in)	overall length (in)	screw size	pipe size	use this drill size	order number 192
#1	.054	.156	2.000	#8 - 1/4	--	5/64	C53651
#2	.080	.188	2.375	#12 - 5/16	--	7/64	C53652
#3	.125	.250	2.688	5/16 - 7/16	--	5/32	C53653
#4	.188	.328	2.875	7/16 - 9/16	--	1/4	C53654
#5	.250	.438	3.375	9/16 - 3/4	1/8, 1/4	9/32	C53655
#6	.375	.594	3.750	3/4 - 1	3/8	13/32	C53656
#7	.500	.750	4.125	1 - 1-3/8	1/2	17/32	C53657
#8	.750	1.000	4.375	1-3/8 - 1-3/4	3/4	13/16	C53658
#9	1.000	1.281	4.625	1-3/4 - 2-1/8	1	1-1/16	C53659
#10	1.250	1.563	5.000	2-1/8 - 2-1/2	1-1/4	1-5/16	C53660
#11	1.500	1.875	5.625	2-1/2 - 3	1-1/2	1-9/16	C53661
#12	1.875	2.313	6.250	3 - 3-1/2	2	1-15/16	C53662

NOTE: Recommended drill size and extractor size shown above are for normal conditions. Unusual conditions will require the use of other size extractors and drills, depending on the length of the broken section and the depth of the hole. In general, use the largest possible screw extractor.


Other Tools

Ezy-Out® Screw Extractor Set

Sets

Style: **192**


no. of pieces	sizes	order number 192
5	#1, through #5	C00906
6	#1 through #6	C00907
4	#6 through #9	C00908
3	#4 through #6	C00909
12	#1 through #6 plus drills 5/64", 7/64", 5/32", 1/4", 9/32", 13/32"	C00910

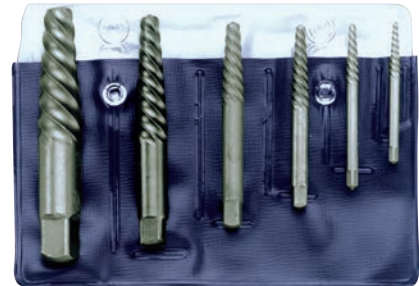

TECH TIPS

Use Screw Extractors to Remove Broken Screws and Bolts

Screw extractors are often used in maintenance departments, machine shops, garages, and workshops to remove broken screws, bolts, or other threaded parts.

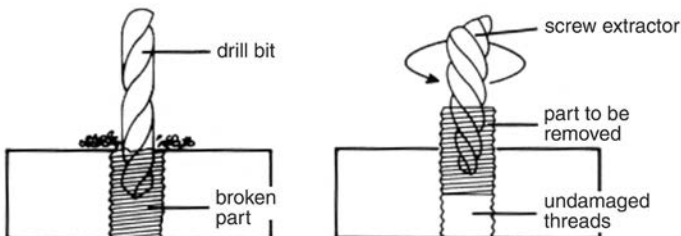

To remove a broken screw, follow this procedure.

- Drill a hole into the broken screw using the recommended drill size from the table above.
- Insert the proper screw extractor into the hole and start a counter-clockwise (left-hand) rotation using a tap wrench on the square on the shank.
- The extractor will grip the wall of the hole in the screw and back the screw out without damaging the threads.
- A penetrating oil can be helpful in removing rusty or corroded parts.

Styles: 850, 855, 860, 3507
Mo-Max® HSS
Style: 850

 ANSI
SIZES

HSS


Mo-Max® Cobalt
Style: 855

 ANSI
SIZES

 M42
Cobalt

**Super
Mo-Max® Cobalt**
Style: 860

 ANSI
SIZES

 M42
Cobalt

 HEAVY
DUTY

**Super
Mo-Max® Cobalt**
Style: 3507

 ANSI
SIZES

 T-15
SUBSTRATE

 HEAVY
DUTY


			order number			
tool bit size		overall length	850	855	860	3507
fractional	(in)	(in)	M2 HSS	M42 Cobalt	M42 Cobalt	T15
1/8	.1250	2.500	C44505	C44536	C44567	—
3/16	.1875	2.500	C44509	C44540	C44571	C44671
1/4	.2500	2.500	C44513	C44544	C44575	C44672
5/16	.3125	2.500	C44514	C44545	C44576	C44673
3/8	.3750	3.000	C44516	C44547	C44578	C44674
7/16	.4375	3.500	C44518	C44549	C44580	C44675
1/2	.5000	4.000	C44520	C44551	C44582	C44676
5/8	.6250	4.500	C44522	C44553	C44584	C44677
3/4	.7500	5.000	C44525	C44556	C44587	C44678
7/8	.8750	6.000	C44527	C44558	C44589	—
1	1.0000	7.000	C44528	C44559	C44590	C44679
1-1/4	1.2500	9.000	C44530	C44561	C44592	—


TECH TIPS
Ground Tool Bits

- Mo-Max tool bits are designed for general-purpose work in moderate materials.
- Mo-Max Cobalt tool bits are ideal for general-purpose work in harder materials.
- Super Mo -Max Cobalt tool bits are designed for heavy-duty work in high-temp alloys.
- Super Cle-Max Cobalt tool bits are meant for the heaviest duty work in tough materials.

Other Tools

Tool Bits Rectangular

Styles: **851, 856, 861, 3517**



Mo-Max® HSS

Style: **851**



Mo-Max® Cobalt

Style: **856**



Super Mo-Max® Cobalt

Style: **861**



Super Mo-Max® Cobalt

Style: **3517**



order number

tool bit size fractional	width (in)	height (in)	overall length (in)	851 M2 HSS	856 M42 Cobalt	861 M42 Cobalt	3517 T15
1/4 x 3/8	.250	.375	2.500	C44600	C44601	C44602	—
1/4 x 3/8	.250	.375	3.000	—	—	—	C44685
1/4 x 1/2	.250	.500	4.000	C44606	C44607	C44608	C44686
1/4 x 1/2	.250	.500	6.000	C44609	C44610	C44611	—
1/4 x 3/4	.250	.750	5.000	—	—	—	C44687
5/16 x 1/2	.313	.500	3.000	C44616	C44617	C44618	—
3/8 x 1/2	.375	.500	3.000	C44619	C44620	C44621	—
3/8 x 1/2	.375	.500	4.000	C44622	C44623	C44624	C44689
3/8 x 1/2	.375	.500	6.000	C44625	C44626	C44627	—
3/8 x 5/8	.375	.625	4.000	C44628	C44629	C44630	—
3/8 x 5/8	.375	.625	4.500	—	—	—	C44690
3/8 x 5/8	.375	.625	5.000	C44631	C44632	C44633	—
3/8 x 5/8	.375	.625	6.000	C44634	C44635	C44636	—
3/8 x 3/4	.375	.750	4.000	C44637	C44638	—	—
3/8 x 3/4	.375	.750	6.000	C44640	C44641	C44642	—
1/2 x 3/4	.500	.750	4.000	C44644	C44645	C44646	—
1/2 x 3/4	.500	.750	5.000	—	—	—	C44692
1/2 x 3/4	.500	.750	6.000	C44647	C44648	C44649	—
1/2 x 1	.500	1.000	7.000	—	—	—	C44693
1/2 x 1	.500	1.000	8.000	C44650	C44651	C44652	—
5/8 x 3/4	.625	.750	5.000	C44653	C44654	C44655	C44694
5/8 x 7/8	.625	.875	6.000	C44656	C44657	C44658	—
3/4 x 1	.750	1.000	6.000	C44659	C44660	C44661	—
3/4 x 1	.750	1.000	7.000	—	—	—	C44696
1 x 1-1/4	1.000	1.250	6.000	—	—	—	C44697

Styles: 852, 857
Cut-Off Blades
Mo-Max® HSS
Style: 852

Mo-Max® Cobalt
Style: 857


blade size fractional	nominal thickness (in)	nominal height (in)	overall length (in)	order number	
				852 M2 HSS	857 M42 Cobalt
1/16 x 1/2 x 4-1/2	.0625	.500	4.500	C44701	C44702
1/16 x 11/16 x 5	.0625	.688	5.000	C44703	C44704
1/16 x 13/16 x 6	.0625	.813	6.000	C44705	C44706
3/32 x 1/2 x 4-1/2	.0938	.500	4.500	C44707	C44708
3/32 x 11/16 x 5	.0938	.688	5.000	C44709	C44710
1/8 x 11/16 x 5	.1250	.688	5.000	C44715	C44716
1/8 x 13/16 x 6	.1250	.813	6.000	C44717	C44718
1/8 x 1 x 6-1/2	.1250	1.000	6.500	C44719	C44720
5/32 x 13/16 x 6	.1562	.813	6.000	C44721	—
3/16 x 13/16 x 6	.1875	.813	6.000	C44723	C44724
3/16 x 1 x 6-1/2	.1875	1.000	6.500	C44725	C44726
1/4 x 1 x 6-1/2	.2500	1.000	6.500	C44731	—

Styles: 853, 858
**Cut-Off Blades for
Armstrong and Williams Holders**
Mo-Max® HSS
Style: 853

Mo-Max® Cobalt
Style: 858


blade size fractional	nominal thickness (in)	nominal height (in)	overall length (in)	order number		fitting Armstrong holder no.	fitting Williams holder no.
				853 M2 HSS	858 M42 Cobalt		
3/32 x 1/2 x 4-1/2	.0938	.500	4.500	C44740	C44741	19, 29L, 29R	—
3/32 x 5/8 x 5	.0938	.625	5.000	C44742	C44743	20, 30L, 30R	N-20R, N30L, N30R
1/8 x 3/4 x 5	.1250	.750	5.000	C44744	C44745	21, 31L, 31R	N21-R, N-31L, N-31R
1/8 x 7/8 x 6	.1250	.875	6.000	C44746	C44747	22, 32L, 32R	N-22R, N-32L, N-32R
3/16 x 1 x 6-1/2	.1875	1.000	6.500	C44748	—	23, 33L, 33R	N-23R, N-33R, N-33L

Cut-Off Blades

Reamer Blank Oversize

Style: **902**



ANSI
SIZES

HSS



Tolerance $+.0002/-0.0000$

blank diameter	width (in)	height (in)	order number
			902
3/64	.0469	1.750	C19271
#51	.0670	2.000	C19288
1/8	.1250	2.750	C19335
5/32	.1562	3.125	C19355
3/16	.1875	3.500	C19377
7/32	.2188	3.750	C19398
1/4,E	.2500	4.000	C19416
5/16	.3125	4.500	C19449

Drill Blank Undersize

Style: **903**



ANSI
SIZES

HSS



Tolerance $+.0000/-0.0002$

blank diameter	width (in)	height (in)	order number
			903
#55	.0520	1.875	C19562
1/16	.0625	1.875	C19570
3/32	.0938	2.250	C19599
1/8	.1250	2.750	C19622
3/16	.1875	3.500	C19664
1/4,E	.2500	4.000	C19703
5/16	.3125	4.500	C19736
3/8	.3750	5.000	C19766
1/2	.5000	6.000	C19795



TECH TIPS

Drill and Reamer Blanks

- Ideal for use as drifts of dowel pins, for gauging purposes, and for making punches.
- Also can be used for round tool bits, countersinks, boring, or burring tools.

Styles: **305, 307**

Side Milling Cutter

Style: **305**

HSS

Note

For side milling and slotting.



size no.	width of face (in)	cutter diameter (in)	hole size (in)	teeth	order number 305
305-16	.2500	4.00	1.00	24	C45064
305-17	.3750	4.00	1.00	24	C45065
305-19	.5000	4.00	1.25	22	C45067
305-31	.7500	5.00	1.25	26	C45078

Style: **307**HSS
Staggered Tooth**Note**

For deep slotting.



size no.	width of face (in)	cutter diameter (in)	hole size (in)	teeth	order number 307
307-6	.2500	3.00	1.00	16	C45114
307-24	.5000	6.00	1.25	24	C45132

Style: **321**Woodruff
Keyseat Cutter
HSS, 1/2" Shank**Note**

For milling Woodruff keys.

Furnished 1/32" large to allow for re-sharpening.



size no. key no.	width of face (in)	nominal diameter (in)	overall length (in)	teeth	order number 321
202	.2500	.063	2.063	8	C45481
202-1/2	.3125	.063	2.063	8	C45520
203	.3750	.063	2.063	8	C45482
204	.5000	.063	2.063	10	C45483
302-1/2	.3125	.094	2.094	8	C45521
304	.5000	.094	2.094	10	C45485
305	.6250	.094	2.094	10	C45486
403	.3750	.125	2.125	8	C45487
404	.5000	.125	2.125	10	C45488
405	.6250	.125	2.125	10	C45489
406	.7500	.125	2.125	10	C45490
506	.7500	.156	2.156	10	C45492
605	.6250	.188	2.188	10	C45494
606	.7500	.188	2.188	10	C45495
608	1.0000	.188	2.188	12	C45497
610	1.2500	.188	2.188	14	C45499
806	.7500	.250	2.250	10	C45504
807 (121)	.8750	.250	2.250	14	C45505
808 (141)	1.0000	.250	2.250	12	C45506
809	1.1250	.250	2.250	14	C45507
810	1.2500	.250	2.250	14	C45508
811	1.3750	.250	2.250	14	C45509
812	1.5000	.250	2.250	16	C45510
1008 (131)	1.0000	.313	2.313	12	C45511
1009 (161)	1.1500	.313	2.313	14	C45512
1010	1.2500	.313	2.313	14	C45513
1012	1.5000	.313	2.313	16	C45515
1210	1.2500	.375	2.375	12	C45517
1212	1.5000	.375	2.375	16	C45519

HSS Screw Slotting Saws

Styles: **318**



Note

For slotting screw and bolt heads.



size no.	width of face (in)	cutter diameter (in)	hole size (in)	teeth	wire gage	order number 318
318-79	.0160	1.75	.625	90	26	C45245
318-75	.0250	1.75	.625	90	22	C45241
318-72	.0360	1.75	.625	90	19	C45238
318-67	.0640	1.75	.625	90	14	C45233
318-61	.0360	2.25	.625	60	19	C45227
318-25	.0100	2.75	1.000	72	30	C45215
318-24	.0130	2.75	1.000	72	28	C45214
318-20	.0200	2.75	1.000	72	24	C45210
318-18	.0250	2.75	1.000	72	22	C45208
318-17	.0280	2.75	1.000	72	21	C45207

size no.	width of face (in)	cutter diameter (in)	hole size (in)	teeth	wire gage	order number 318
318-16	.0320	2.75	1.000	72	20	C45206
318-14	.0400	2.75	1.000	72	18	C45204
318-13	.0450	2.75	1.000	72	17	C45203
318-12	.0510	2.75	1.000	72	16	C45202
318-11	.0570	2.75	1.000	72	15	C45201
318-10	.0640	2.75	1.000	72	14	C45200
318-9909	.0720	2.75	1.000	56	13	C45308
318-8	.0810	2.75	1.000	72	12	C45198
318-7	.0910	2.75	1.000	72	11	C45197
318-6	.1020	2.75	1.000	72	10	C45196
318-4	.1280	2.75	1.000	72	8	C45194

HSS Plain Metal Slitting Saws

Style: **326**

Note

For slotting and cutoff operations.




size no.	width of face (in)	cutter diameter (in)	hole size (in)	teeth	order number 326
326-9002	.0625	1.25	.500	28	C45523
326-9011	.0312	2.00	.500	38	C45532
326-6	.0312	3.00	1.000	36	C45542
326-7	.0469	3.00	1.000	36	C45543
326-8	.0625	3.00	1.000	36	C45544
326-9	.0938	3.00	1.000	36	C45545
326-10	.1250	3.00	1.000	36	C45546
326-11	.1562	3.00	1.000	36	C45547
326-12	.0312	4.00	1.000	40	C45548
326-13	.0469	4.00	1.000	40	C45549

size no.	width of face (in)	cutter diameter (in)	hole size (in)	teeth	order number 326
326-14	.0625	4.00	1.000	40	C45550
326-15	.0938	4.00	1.000	40	C45551
326-16	.1250	4.00	1.000	40	C45552
326-19	.0625	5.00	1.000	44	C45555
326-20	.0938	5.00	1.000	44	C45556
326-21	.1250	5.00	1.000	44	C45557
326-22	.1250	5.00	1.250	44	C45558
326-25	.0625	6.00	1.000	48	C45559
326-26	.0938	6.00	1.000	48	C45560

Styles: 327
Note
For slotting and cutoff operations.


size no.	width of face (in)	cutter diameter (in)	hole size (in)	teeth	order number 327
327-2	.0938	2.50	.875	28	C45571
327-3	.1250	2.50	.875	28	C45572
327-4	.0625	3.00	1.000	32	C45573
327-5	.0938	3.00	1.000	32	C45574
327-6	.1250	3.00	1.000	32	C45575
327-7	.1562	3.00	1.000	32	C45576
327-8	.0625	4.00	1.000	36	C45577
327-9	.0938	4.00	1.000	36	C45578
327-10	.1250	4.00	1.000	36	C45579
327-15	.1250	5.00	1.000	40	C45584

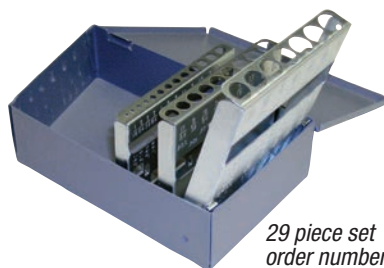Set
Style: 321
Set - Drill Case
Metal, No Drills


29 piece set
order number
#C00851



case number	slots (no. of pieces)	holds drill size	order number
#4115	115	1/64" to 1/2" x 1/64", A to Z letter, #1 to #60 wire	C00878
#413	13	1/16 to 1/4 x 1/64"	C00854
#415	15	1/16" to 1/2" x 1/32"	C00852
#421	21	1/16" to 3/8" x 1/64"	C00853
#426	26	A to Z letter	C00857
#429	29	1/16" to 1/2" x 1/64"	C00851
#460	60	#1 to #60 wire	C00855
#2001M	25	1.0mm to 13.0 mm x 0.5mm	C00865

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C00851	429	333	C01035	2002	38	C02681	2011	61	C02968	2012	42	C03106	2012	43
C00852	415	333	C01036	2002	38	C02685	2011	61	C02969	2012	42	C03108	2012	43
C00853	421	333	C01037	2002	38	C02690	2011	61	C02971	2012	42	C03111	2012	43
C00854	413	333	C01038	2002	38	C02694	2011	61	C02973	2012	42	C03114	2012	43
C00855	460	333	C01039	2002	38	C02700	2011	61	C02975	2012	42	C03116	2012	43
C00857	426	333	C01040	2002	38	C02702	2011	61	C02976	2012	42	C03119	2012	43
C00865	2001M	333	C01041	2002	38	C02704	2011	61	C02978	2012	42	C03121	2012	43
C00878	4115	333	C01042	2002	38	C02707	2011	61	C02980	2012	42	C03124	2012	43
C00901	2075 Set	49	C01043	2002	38	C02710	2011	61	C02982	2012	42	C03127	2012	43
C00901	2075	118	C01044	2002	38	C02713	2011	61	C02983	2012	42	C03129	2012	43
C00902	2075 Set	49	C01045	2002	39	C02719	2011	61	C02985	2012	42	C03133	2012	43
C00902	2075	118	C01046	2002	39	C02724	2011	61	C02986	2012	42	C03136	2012	43
C00906	192 Set	326	C01047	2002	39	C02735	2011	61	C02988	2012	42	C03137	2012	43
C00907	192 Set	326	C01048	2002	39	C02746	2011	61	C02990	2012	42	C03142	2012	43
C00908	192 Set	326	C01049	2002	39	C02767	2011	61	C02992	2012	42	C03144	2012	43
C00909	192 Set	326	C01181	2002	39	C02776	2011	61	C02995	2012	42	C03146	2012	43
C00910	192 Set	326	C01192	2002	39	C02785	2011	61	C02998	2012	42	C03148	2012	43
C00934	2002G	37	C01330	2002G	37	C02807	2011	61	C03000	2012	42	C03149	2012	43
C00934	2002G	118	C01330	2002G	118	C02811	2011	61	C03001	2012	43	C03150	2012	43
C00937	2002	39	C01332	2120	15	C02818	2011	61	C03003	2012	43	C03152	2012	43
C00937	2002	118	C01332	2120	118	C02833	2011	61	C03005	2012	43	C03155	2012	43
C00939	2002G	37	C01401	2006	50	C02848	2011	61	C03007	2012	43	C03158	2012	43
C00939	2002G	118	C01415	2006	50	C02861	2011	61	C03009	2012	43	C03160	2012	43
C00944	998	94	C01430	2006	50	C02867	2011	61	C03011	2012	43	C03163	2012	43
C00944	998	119	C01443	2006	50	C02872	2011	61	C03012	2012	43	C03165	2012	43
C00960	2001G	37	C01453	2006	50	C02877	2011	61	C03013	2012	43	C03457	2020	40
C00960	2001G	118	C01462	2006	50	C02881	2012	42	C03015	2012	43	C03458	2020	40
C00962	2510	73	C01473	2006	50	C02883	2012	42	C03016	2012	43	C03460	2020	40
C00962	2510	119	C01484	2006	50	C02887	2012	42	C03019	2012	43	C03461	2020	40
C00964	4001 Set	105	C01495	2006	50	C02890	2012	42	C03022	2012	43	C03464	2020	40
C00964	4001	119	C01506	2006	50	C02893	2012	42	C03023	2012	43	C03469	2020	40
C00969	610	100	C01516	2006	50	C02894	2012	42	C03024	2012	43	C03471	2020	40
C00969	610	119	C01532	2006	50	C02896	2012	42	C03026	2012	43	C03475	2020	40
C00970	10001	99	C01538	2006	50	C02898	2012	42	C03028	2012	43	C03477	2020	40
C00970	10001	119	C01551	2006	50	C02899	2012	42	C03030	2012	43	C03479	2020	40
C00971	10001	99	C01561	2006	50	C02901	2012	42	C03031	2012	43	C03482	2020	40
C00971	10001	119	C01588	2006	50	C02903	2012	42	C03034	2012	43	C03484	2020	40
C00972	10003	99	C01600	2006	50	C02904	2012	42	C03035	2012	43	C03487	2020	40
C00972	10003	119	C01799	2001	38	C02906	2012	42	C03037	2012	43	C03489	2020	40
C00973	10003	99	C01801	2001	38	C02907	2012	42	C03039	2012	43	C03491	2020	40
C00973	10003	119	C01803	2001	38	C02909	2012	42	C03040	2012	43	C03492	2020	40
C00980	2120	15	C01805	2001	38	C02910	2012	42	C03042	2012	43	C03495	2020	40
C00980	2120	118	C01808	2001	38	C02912	2012	42	C03044	2012	43	C03496	2020	40
C00986	2213	60	C01811	2001	38	C02914	2012	42	C03045	2012	43	C03499	2020	40
C00986	2213	118	C01812	2001	38	C02915	2012	42	C03046	2012	43	C03502	2020	40
C01012	2002	38	C01814	2001	38	C02917	2012	42	C03048	2012	43	C03505	2020	40
C01013	2002	38	C01816	2001	38	C02918	2012	42	C03051	2012	43	C03506	2020	40
C01014	2002	38	C01817	2001	38	C02920	2012	42	C03053	2012	43	C03508	2020	40
C01015	2002	38	C01819	2001	38	C02921	2012	42	C03055	2012	43	C03510	2020	40
C01016	2002	38	C01821	2001	38	C02923	2012	42	C03057	2012	43	C03512	2020	40
C01017	2002	38	C01822	2001	38	C02924	2012	42	C03060	2012	43	C03513	2020	40
C01018	2002	38	C01824	2001	38	C02927	2012	42	C03063	2012	43	C03515	2020	40
C01019	2002	38	C01825	2001	38	C02928	2012	42	C03064	2012	43	C03517	2020	40
C01020	2002	38	C01827	2001	38	C02932	2012	42	C03066	2012	43	C03519	2020	40
C01021	2002	38	C01828	2001	38	C02934	2012	42	C03068	2012	43	C03520	2020	40
C01022	2002	38	C01830	2001	38	C02938	2012	42	C03070	2012	43	C03522	2020	40
C01023	2002	38	C01832	2001	39	C02940	2012	42	C03073	2012	43	C03523	2020	40
C01024	2002	38	C01833	2001	39	C02942	2012	42	C03077	2012	43	C03525	2020	40
C01025	2002	38	C01835	2001	39	C02945	2012	42	C03079	2012	43	C03527	2020	40
C01026	2002	38	C01836	2001	39	C02947	2012	42	C03081	2012	43	C03529	2020	40
C01027	2002	38	C02593	2011	61	C02950	2012	42	C03083	2012	43	C03532	2020	40
C01028	2002	38	C02646	2011	61	C02952	2012	42	C03086	2012	43	C03535	2020	40
C01029	2002	38	C02652	2011	61	C02954	2012	42	C03088	2012	43	C03537	2020	40
C01030	2002	38	C02654	2011	61	C02955	2012	42	C03094	2012	43	C03538	2020	40
C01031	2002	38	C02659	2011	61	C02958	2012	42	C03095	2012	43	C03540	2020	40
C01032	2002	38	C02666	2011	61	C02959	2012	42	C03097	2012	43	C03542	2020	40
C01033	2002	38	C02667	2011	61	C02962	2012	42	C03099	2012	43	C03544	2020	40
C01034	2002	38	C02671	2011	61	C02965	2012	42	C03101	2012	43	C03546	2020	40

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C03548	. 2020	40	C03758	. 2065-TN	45	C04462	. 2120	14	C04619	. 2120	15	C08112	. 3722-6	85
C03549	. 2020	40	C03760	. 2065-TN	45	C04464	. 2120	14	C04622	. 2120	15	C08113	. 3722-6	85
C03550	. 2020	40	C03761	. 2065-TN	45	C04466	. 2120	14	C04625	. 2120	15	C08114	. 3722-6	85
C03552	. 2020	40	C03762	. 2065-TN	45	C04467	. 2120	14	C04627	. 2120	15	C08115	. 3722-6	85
C03553	. 2020	40	C03764	. 2065-TN	45	C04470	. 2120	14	C04630	. 2120	15	C08117	. 3722-6	85
C03556	. 2020	40	C03765	. 2065-TN	45	C04471	. 2120	14	C04632	. 2120	15	C08119	. 3722-6	86
C03559	. 2020	40	C03773	. 2065-TN	45	C04473	. 2120	14	C04634	. 2120	15	C08121	. 3722-6	86
C03560	. 2020	40	C03776	. 2065-TN	45	C04475	. 2120	14	C04636	. 2120	15	C08123	. 3722-6	86
C03561	. 2020	40	C03781	. 2065-TN	45	C04476	. 2120	14	C04638	. 2120	15	C08130	. 3722-6	86
C03563	. 2020	40	C03784	. 2065-TN	45	C04478	. 2120	14	C04640	. 2120	15	C08132	. 3722-6	86
C03565	. 2020	40	C03786	. 2065-TN	45	C04480	. 2120	14	C04641	. 2120	15	C08133	. 3722-6	86
C03567	. 2020	40	C03801	. 2065-TN	45	C04481	. 2120	14	C04643	. 2120	15	C08134	. 3722-6	86
C03568	. 2020	40	C03804	. 2065-TN	45	C04482	. 2120	14	C04645	. 2120	15	C08135	. 3722-6	86
C03571	. 2020	40	C03806	. 2065-TN	45	C04484	. 2120	14	C04647	. 2120	15	C08137	. 3722-6	86
C03572	. 2020	40	C03807	. 2065-TN	45	C04487	. 2120	14	C04649	. 2120	15	C08138	. 3722-6	86
C03574	. 2020	40	C04356	. 2120	14	C04489	. 2120	14	C04650	. 2120	15	C08140	. 3722-6	85
C03576	. 2020	40	C04357	. 2120	14	C04491	. 2120	14	C04652	. 2120	15	C08142	. 3722-6	85
C03577	. 2020	40	C04359	. 2120	14	C04493	. 2120	14	C04654	. 2120	15	C08144	. 3722-6	85
C03579	. 2020	40	C04360	. 2120	14	C04496	. 2120	14	C04656	. 2120	15	C08145	. 3722-6	85
C03581	. 2020	40	C04363	. 2120	14	C04499	. 2120	14	C04658	. 2120	15	C08146	. 3722-6	85
C03582	. 2020	40	C04364	. 2120	14	C04500	. 2120	14	C04659	. 2120	15	C08147	. 3722-6	85
C03583	. 2020	40	C04368	. 2120	14	C04502	. 2120	14	C04661	. 2120	15	C08148	. 3722-6	85
C03585	. 2020	40	C04370	. 2120	14	C04504	. 2120	14	C04663	. 2120	15	C08149	. 3722-6	86
C03588	. 2020	40	C04374	. 2120	14	C04506	. 2120	14	C04665	. 2120	15	C08150	. 3722-6	86
C03590	. 2020	40	C04376	. 2120	14	C04509	. 2120	14	C04667	. 2120	15	C08151	. 3722-6	86
C03592	. 2020	41	C04378	. 2120	14	C04513	. 2120	14	C04668	. 2120	15	C08152	. 3722-6	86
C03594	. 2020	41	C04381	. 2120	14	C04515	. 2120	14	C04675	. 2120	15	C08153	. 3722-6	86
C03597	. 2020	41	C04383	. 2120	14	C04517	. 2120	15	C04683	. 2120	15	C08154	. 3722-6	86
C03601	. 2020	41	C04386	. 2120	14	C04519	. 2120	15	C04690	. 2120	15	C08155	. 3722-6	86
C03610	. 2020	41	C04388	. 2120	14	C04522	. 2120	15	C04697	. 2120	15	C08156	. 3722-6	86
C03618	. 2020	41	C04390	. 2120	14	C04524	. 2120	15	C05105	. 2565-TN	78	C08157	. 3722-6	86
C03632	. 2020	41	C04391	. 2120	14	C04526	. 2120	15	C05118	. 2565-TN	78	C08158	. 3722-6	86
C03636	. 2020	41	C04394	. 2120	14	C04530	. 2120	15	C05120	. 2565-TN	78	C08159	. 3722-6	86
C03643	. 2020	41	C04395	. 2120	14	C04531	. 2120	15	C05123	. 2565-TN	78	C08160	. 3722-6	86
C03651	. 2020	41	C04398	. 2120	14	C04533	. 2120	15	C05131	. 2565-TN	78	C08161	. 3722-6	86
C03658	. 2020	41	C04401	. 2120	14	C04535	. 2120	15	C05141	. 2565-TN	78	C08162	. 3722-6	86
C03673	. 2020	41	C04404	. 2120	14	C04537	. 2120	15	C05152	. 2565-TN	78	C08163	. 3722-6	86
C03681	. 2020	41	C04405	. 2120	14	C04542	. 2120	15	C05153	. 2565-TN	78	C08164	. 3722-6	86
C03686	. 2020	41	C04407	. 2120	14	C04544	. 2120	15	C05154	. 2565-TN	78	C08165	. 3722-6	86
C03689	. 2020	41	C04409	. 2120	14	C04547	. 2120	15	C05160	. 2565-TN	78	C08166	. 3722-6	86
C03692	. 2020	41	C04411	. 2120	14	C04550	. 2120	15	C05165	. 2565-TN	78	C08167	. 3722-12	85
C03695	. 2020	41	C04412	. 2120	14	C04552	. 2120	15	C05173	. 2565-TN	78	C08168	. 3722-12	85
C03697	. 2020	41	C04414	. 2120	14	C04555	. 2120	15	C05176	. 2565-TN	78	C08169	. 3722-12	85
C03702	. 2020	41	C04416	. 2120	14	C04557	. 2120	15	C05181	. 2565-TN	78	C08170	. 3722-12	85
C03705	. 2065-TN	44	C04418	. 2120	14	C04560	. 2120	15	C05184	. 2565-TN	79	C08171	. 3722-12	85
C03708	. 2065-TN	44	C04419	. 2120	14	C04563	. 2120	15	C05187	. 2565-TN	79	C08172	. 3722-12	85
C03711	. 2065-TN	44	C04421	. 2120	14	C04565	. 2120	15	C05190	. 2565-TN	79	C08173	. 3722-12	85
C03718	. 2065-TN	44	C04422	. 2120	14	C04569	. 2120	15	C05193	. 2565-TN	79	C08174	. 3722-12	85
C03720	. 2065-TN	44	C04424	. 2120	14	C04572	. 2120	15	C05195	. 2565-TN	79	C08175	. 3722-12	86
C03722	. 2065-TN	44	C04426	. 2120	14	C04573	. 2120	15	C05198	. 2565-TN	79	C08176	. 3722-12	86
C03724	. 2065-TN	44	C04428	. 2120	14	C04578	. 2120	15	C05201	. 2565-TN	79	C08177	. 3722-12	86
C03725	. 2065-TN	44	C04431	. 2120	14	C04580	. 2120	15	C05203	. 2565-TN	79	C08178	. 3722-12	86
C03728	. 2065-TN	44	C04434	. 2120	14	C04582	. 2120	15	C05204	. 2565-TN	79	C08179	. 3722-12	86
C03730	. 2065-TN	44	C04436	. 2120	14	C04584	. 2120	15	C05205	. 2565-TN	79	C08180	. 3722-12	86
C03731	. 2065-TN	44	C04437	. 2120	14	C04585	. 2120	15	C05206	. 2565-TN	79	C08181	. 3722-12	86
C03732	. 2065-TN	44	C04439	. 2120	14	C04586	. 2120	15	C05207	. 2565-TN	79	C08182	. 3722-12	86
C03733	. 2065-TN	44	C04441	. 2120	14	C04588	. 2120	15	C08100	. 3722-6	85	C08183	. 3722-12	86
C03738	. 2065-TN	44	C04443	. 2120	14	C04591	. 2120	15	C08101	. 3722-6	85	C08184	. 3722-12	86
C03741	. 2065-TN	44	C04445	. 2120	14	C04594	. 2120	15	C08102	. 3722-6	85	C08185	. 3722-12	86
C03742	. 2065-TN	44	C04447	. 2120	14	C04596	. 2120	15	C08103	. 3722-6	85	C08186	. 3722-12	86
C03743	. 2065-TN	44	C04448	. 2120	14	C04599	. 2120	15	C08104	. 3722-6	85	C08187	. 3722-12	86
C03745	. 2065-TN	44	C04449	. 2120	14	C04601	. 2120	15	C08105	. 3722-6	85	C08188	. 3722-12	85
C03747	. 2065-TN	44	C04451	. 2120	14	C04604	. 2120	15	C08106	. 3722-6	85	C08578	. 2510	70
C03750	. 2065-TN	45	C04452	. 2120	14	C04606	. 2120	15	C08107	. 3722-6	85	C08582	. 2510	71
C03751	. 2065-TN	45	C04455	. 2120	14	C04609	. 2120	15	C08108	. 3722-6	85	C08587	. 2510	71
C03752	. 2065-TN	45	C04458	. 2120	14	C04612	. 2120	15	C08109	. 3722-6	85	C08592	. 2510	70
C03753	. 2065-TN	45	C04459	. 2120	14	C04614	. 2120	15	C08110	. 3722-6	85	C08593	. 2510	70
C03756	. 2065-TN	45	C04460	. 2120	14	C04617	. 2120	15	C08111	. 3722-6	85	C08594	. 2510	70

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C08596	. 2510	70	C08708	. 2510	71	C08858	. 2510	72	C09157	. 2550	74	C09711	. 950E	87
C08597	. 2510	70	C08710	. 2510	71	C08859	. 2510	72	C09158	. 2550	74	C09713	. 950E	87
C08600	. 2510	70	C08712	. 2510	71	C08861	. 2510	72	C09165	. 2550	75	C09714	. 950E	87
C08601	. 2510	70	C08713	. 2510	71	C08863	. 2510	73	C09168	. 2550	75	C09715	. 950E	87
C08603	. 2510	70	C08714	. 2510	71	C08865	. 2510	73	C09170	. 2550	75	C09717	. 950E	87
C08605	. 2510	70	C08715	. 2510	71	C08866	. 2510	73	C09176	. 2550	75	C09719	. 950E	87
C08607	. 2510	70	C08717	. 2510	71	C08868	. 2510	73	C09179	. 2550	75	C09721	. 950E	87
C08608	. 2510	71	C08718	. 2510	71	C08870	. 2510	73	C09181	. 2550	75	C09723	. 950E	88
C08609	. 2510	72	C08719	. 2510	71	C08871	. 2510	73	C09184	. 2550	75	C09725	. 950E	88
C08610	. 2510	72	C08721	. 2510	71	C08872	. 2510	73	C09186	. 2550	75	C09727	. 950E	88
C08611	. 2510	70	C08724	. 2510	71	C08874	. 2510	73	C09187	. 2550	75	C09729	. 950E	88
C08612	. 2510	70	C08726	. 2510	71	C08876	. 2510	73	C09195	. 2550	75	C09731	. 950E	88
C08613	. 2510	70	C08728	. 2510	71	C08877	. 2510	73	C09197	. 2550	75	C09733	. 950E	88
C08615	. 2510	70	C08730	. 2510	71	C08879	. 2510	73	C09202	. 2550	75	C09735	. 950E	88
C08618	. 2510	70	C08733	. 2510	71	C08880	. 2510	73	C09205	. 2550	75	C09736	. 950E	87
C08620	. 2510	70	C08735	. 2510	71	C08881	. 2510	73	C09211	. 2550	75	C09738	. 950E	87
C08623	. 2510	70	C08737	. 2510	71	C08883	. 2510	73	C09234	. 2550	75	C09740	. 950E	87
C08625	. 2510	70	C08738	. 2510	72	C08885	. 2510	73	C09257	. 2550	75	C09742	. 950E	87
C08627	. 2510	70	C08743	. 2510	72	C08886	. 2510	73	C09271	. 2550	75	C09744	. 950E	87
C08628	. 2510	70	C08745	. 2510	72	C08888	. 2510	73	C09281	. 2550	75	C09746	. 950E	87
C08629	. 2510	70	C08746	. 2510	72	C08890	. 2510	73	C09443	. 2540	77	C09748	. 950E	87
C08631	. 2510	70	C08749	. 2510	72	C08892	. 2510	73	C09455	. 2540	77	C09750	. 950E	88
C08632	. 2510	70	C08750	. 2510	72	C08894	. 2510	73	C09467	. 2540	77	C09752	. 950E	88
C08635	. 2510	70	C08752	. 2510	72	C08895	. 2510	73	C09478	. 2540	77	C09754	. 950E	88
C08638	. 2510	70	C08755	. 2510	72	C08897	. 2510	73	C09490	. 2540	77	C09756	. 950E	88
C08640	. 2510	70	C08757	. 2510	72	C08899	. 2510	73	C09504	. 2540	77	C09758	. 950E	88
C08641	. 2510	70	C08758	. 2510	72	C08901	. 2510	73	C09513	. 2540	77	C09760	. 950E	88
C08642	. 2510	70	C08759	. 2510	72	C08903	. 2510	73	C09524	. 2540	77	C09762	. 950E	88
C08643	. 2510	70	C08766	. 2510	72	C08904	. 2510	73	C09536	. 2540	77	C09764	. 950E	88
C08644	. 2510	70	C08770	. 2510	72	C09060	. 2550	74	C09545	. 2540	77	C09766	. 950E	88
C08646	. 2510	70	C08772	. 2510	72	C09062	. 2550	74	C09550	. 2540	77	C09768	. 950E	88
C08648	. 2510	70	C08777	. 2510	72	C09066	. 2550	74	C09553	. 2540	77	C09770	. 950E	88
C08649	. 2510	70	C08778	. 2510	72	C09069	. 2550	74	C09555	. 2540	77	C09772	. 950E	88
C08651	. 2510	70	C08779	. 2510	72	C09070	. 2550	74	C09560	. 2540	77	C09774	. 950E	88
C08653	. 2510	70	C08782	. 2510	72	C09074	. 2550	74	C09563	. 2540	77	C09776	. 950E	88
C08655	. 2510	70	C08785	. 2510	72	C09076	. 2550	74	C09565	. 2540	77	C11360	. 2075-TA	46
C08656	. 2510	70	C08787	. 2510	72	C09080	. 2550	74	C09571	. 2540	77	C11361	. 2075-TA	46
C08658	. 2510	70	C08788	. 2510	72	C09082	. 2550	74	C09576	. 2540	77	C11362	. 2075-TA	46
C08659	. 2510	70	C08790	. 2510	72	C09087	. 2550	74	C09581	. 2540	77	C11363	. 2075-TA	46
C08661	. 2510	70	C08792	. 2510	72	C09089	. 2550	74	C09655	. 950E	87	C11364	. 2075-TA	47
C08662	. 2510	70	C08797	. 2510	72	C09092	. 2550	74	C09656	. 950E	87	C11365	. 2075-TA	47
C08663	. 2510	71	C08800	. 2510	72	C09094	. 2550	74	C09657	. 950E	87	C11366	. 2075-TA	47
C08665	. 2510	71	C08807	. 2510	72	C09096	. 2550	74	C09658	. 950E	87	C11367	. 2075-TA	47
C08666	. 2510	71	C08808	. 2510	72	C09097	. 2550	74	C09659	. 950E	87	C11368	. 2075-TA	47
C08668	. 2510	71	C08815	. 2510	72	C09100	. 2550	74	C09660	. 950E	87	C11369	. 2075-TA	47
C08669	. 2510	71	C08816	. 2510	72	C09101	. 2550	74	C09661	. 950E	87	C11370	. 2075-TA	47
C08671	. 2510	71	C08818	. 2510	72	C09104	. 2550	74	C09662	. 950E	87	C11371	. 2075-TA	47
C08673	. 2510	71	C08821	. 2510	72	C09107	. 2550	74	C09663	. 950E	87	C11372	. 2075-TA	47
C08674	. 2510	71	C08823	. 2510	72	C09110	. 2550	74	C09664	. 950E	87	C11373	. 2075-TA	47
C08676	. 2510	71	C08824	. 2510	72	C09111	. 2550	74	C09665	. 950E	87	C11374	. 2075-TA	47
C08678	. 2510	71	C08826	. 2510	72	C09113	. 2550	74	C09666	. 950E	87	C11375	. 2075-TA	48
C08680	. 2510	71	C08827	. 2510	72	C09115	. 2550	74	C09667	. 950E	87	C11376	. 2075-TA	48
C08682	. 2510	71	C08828	. 2510	72	C09117	. 2550	74	C09668	. 950E	87	C11377	. 2075-TA	48
C08684	. 2510	71	C08830	. 2510	72	C09118	. 2550	74	C09669	. 950E	87	C11378	. 2075-TA	48
C08685	. 2510	71	C08832	. 2510	72	C09120	. 2550	74	C09670	. 950E	87	C11379	. 2075-TA	48
C08686	. 2510	71	C08833	. 2510	72	C09122	. 2550	74	C09671	. 950E	87	C11380	. 2075-TA	48
C08687	. 2510	71	C08835	. 2510	72	C09124	. 2550	74	C09672	. 950E	88	C11381	. 2075-TA	48
C08688	. 2510	71	C08837	. 2510	72	C09125	. 2550	74	C09673	. 950E	88	C11382	. 2075-TA	48
C08689	. 2510	71	C08839	. 2510	72	C09128	. 2550	74	C09674	. 950E	88	C11383	. 2075-TA	48
C08692	. 2510	71	C08840	. 2510	72	C09130	. 2550	74	C09675	. 950E	88	C11384	. 2075-TA	49
C08695	. 2510	71	C08842	. 2510	72	C09132	. 2550	74	C09676	. 950E	88	C11385	. 2075-TA	49
C08696	. 2510	71	C08845	. 2510	72	C09134	. 2550	74	C09677	. 950E	88	C11386	. 2075-TA	49
C08697	. 2510	71	C08846	. 2510	72	C09137	. 2550	74	C09678	. 950E	88	C11387	. 2075-TA	49
C08699	. 2510	71	C08848	. 2510	72	C09140	. 2550	74	C09679	. 950E	88	C11400	. 2075-TA	47
C08701	. 2510	71	C08850	. 2510	72	C09143	. 2550	74	C09680	. 950E	88	C11401	. 2075-TA	48
C08703	. 2510	71	C08852	. 2510	72	C09145	. 2550	74	C09681	. 950E	88	C11402	. 2075-TA	48
C08704	. 2510	71	C08853	. 2510	72	C09147	. 2550	74	C09707	. 950E	87	C11403	. 2075-TA	48
C08707	. 2510	71	C08855	. 2510	72	C09154	. 2550	74	C09709	. 950E	87	C11404	. 2075-TA	47

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C11405	2075-TA	48	C11630	2222	54	C11698	2222	53	C12252	2410	90	C13129	3957-6	84
C11408	2075-TA	47	C11631	2222	54	C11699	2222	53	C12254	2410	90	C13130	3957-6	84
C11409	2075-TA	47	C11632	2222	54	C11700	2222	53	C12257	2410	90	C13131	3957-6	84
C11410	2075-TA	47	C11633	2222	54	C11701	2222	53	C12265	2410	90	C13132	3957-6	84
C11411	2075-TA	47	C11634	2222	54	C11702	2222	53	C12272	2410	90	C13133	3957-6	84
C11412	2075-TA	47	C11635	2222	54	C11703	2222	53	C12279	2410	90	C13134	3957-6	84
C11413	2075-TA	47	C11636	2222	54	C11704	2222	53	C12286	2410	90	C13135	3957-6	84
C11414	2075-TA	47	C11637	2222	54	C11705	2222	53	C12290	2410	90	C13136	3957-6	84
C11415	2075-TA	47	C11638	2222	54	C11706	2222	53	C12293	2410	90	C13137	3957-6	84
C11416	2075-TA	47	C11639	2222	54	C11739	995	96	C12301	2410	90	C13138	3957-6	84
C11417	2075-TA	47	C11640	2222	54	C11757	995	96	C12304	2410	90	C13139	3957-6	84
C11418	2075-TA	47	C11641	2222	54	C11771	995	96	C12308	2410	90	C13140	3957-6	84
C11419	2075-TA	47	C11642	2222	54	C11782	995	96	C12315	2410	90	C13141	3957-6	84
C11420	2075-TA	47	C11643	2222	54	C11796	995	96	C12322	2410	90	C13142	3957-6	84
C11422	2075-TA	47	C11644	2222	55	C12040	2410	89	C12336	2410	90	C13143	3957-6	84
C11423	2075-TA	47	C11645	2222	55	C12052	2410	89	C12351	2410	90	C13144	3957-6	84
C11424	2075-TA	47	C11646	2222	55	C12064	2410	89	C12365	2410	90	C13145	3957-6	84
C11425	2075-TA	47	C11647	2222	55	C12069	2410	89	C12483*	2411	89	C13146	3957-6	84
C11426	2075-TA	47	C11648	2222	55	C12075	2410	89	C12505	2411	90	C13147	3957-6	84
C11427	2075-TA	47	C11649	2222	55	C12082	2410	89	C12518	2411	90	C13148	3957-6	84
C11428	2075-TA	47	C11650	2222	55	C12091	2410	89	C12532	2411	90	C13149	3957-6	84
C11431	2075-TA	47	C11651	2222	55	C12099	2410	89	C12541	2411	90	C13150	3957-6	83
C11432	2075-TA	47	C11652	2222	55	C12113	2410	89	C12566	2411	90	C13151	3957-6	83
C11433	2075-TA	47	C11653	2222	55	C12117	2410	89	C12670	2412	90	C13152	3957-6	83
C11434	2075-TA	47	C11654	2222	55	C12124	2410	89	C12678	2412	90	C13153	3957-6	83
C11435	2075-TA	47	C11655	2222	54	C12132	2410	89	C12684	2412	90	C13154	3957-6	83
C11437	2075-TA	46	C11656	2222	54	C12139	2410	89	C12691	2412	90	C13155	3957-6	83
C11438	2075-TA	46	C11657	2222	54	C12147	2410	89	C12705	2440	91	C13156	3957-6	83
C11442	2075-TA	46	C11658	2222	54	C12154	2410	89	C12728	2440	91	C13157	3957-6	83
C11444	2075-TA	46	C11659	2222	54	C12162	2410	89	C12751	2440	91	C13158	3957-6	83
C11445	2075-TA	46	C11660	2222	54	C12167	2410	89	C12765	2440	91	C13159	3957-6	83
C11446	2075-TA	46	C11661	2222	54	C12170	2410	89	C12775	2440	91	C13160	3957-6	83
C11447	2075-TA	46	C11662	2222	54	C12173	2410	89	C12786	2440	91	C13161	3957-6	83
C11448	2075-TA	46	C11663	2222	54	C12176	2410	89	C12796	2440	91	C13162	3957-6	83
C11449	2075-TA	46	C11664	2222	54	C12178	2410	89	C12806	2440	91	C13163	3957-6	83
C11450	2075-TA	46	C11665	2222	54	C12181	2410	89	C12814	2440	91	C13164	3957-6	83
C11451	2075-TA	46	C11666	2222	54	C12183	2410	89	C12828	2440	91	C13165	3957-6	83
C11452	2075-TA	46	C11667	2222	54	C12186	2410	89	C12835	2440	91	C13166	3957-6	83
C11600	2222	53	C11668	2222	54	C12188	2410	89	C12842	2440	91	C13167	3957-6	83
C11601	2222	53	C11669	2222	54	C12191	2410	89	C13100	3957-6	83	C13168	3957-6	83
C11602	2222	53	C11670	2222	54	C12194	2410	89	C13101	3957-6	83	C13169	3957-6	83
C11603	2222	53	C11671	2222	54	C12196	2410	89	C13102	3957-6	83	C13170	3957-6	83
C11604	2222	53	C11672	2222	54	C12199	2410	89	C13103	3957-6	83	C13171	3957-6	83
C11605	2222	53	C11673	2222	54	C12201	2410	89	C13104	3957-6	83	C13172	3957-6	83
C11606	2222	54	C11674	2222	54	C12204	2410	89	C13105	3957-6	83	C13173	3957-6	83
C11607	2222	54	C11675	2222	54	C12207	2410	90	C13106	3957-6	83	C13174	3957-6	83
C11608	2222	54	C11676	2222	54	C12209	2410	90	C13107	3957-6	84	C13176	3957-12	83
C11609	2222	54	C11677	2222	54	C12212	2410	90	C13108	3957-6	84	C13177	3957-12	83
C11610	2222	54	C11678	2222	54	C12214	2410	90	C13109	3957-6	84	C13178	3957-12	83
C11611	2222	54	C11679	2222	54	C12216	2410	90	C13110	3957-6	84	C13179	3957-12	83
C11612	2222	54	C11680	2222	54	C12218	2410	90	C13111	3957-6	84	C13180	3957-12	83
C11613	2222	54	C11681	2222	54	C12220	2410	90	C13112	3957-6	84	C13181	3957-12	83
C11614	2222	54	C11682	2222	54	C12222	2410	90	C13113	3957-6	84	C13182	3957-12	84
C11615	2222	54	C11683	2222	53	C12223	2410	90	C13114	3957-6	84	C13183	3957-12	84
C11616	2222	54	C11684	2222	53	C12225	2410	90	C13115	3957-6	84	C13184	3957-12	84
C11617	2222	54	C11685	2222	53	C12227	2410	90	C13116	3957-6	84	C13185	3957-12	84
C11618	2222	55	C11686	2222	53	C12229	2410	90	C13117	3957-6	84	C13186	3957-12	84
C11619	2222	55	C11687	2222	53	C12231	2410	90	C13118	3957-6	84	C13187	3957-12	84
C11620	2222	55	C11688	2222	53	C12232	2410	90	C13119	3957-6	84	C13188	3957-12	84
C11621	2222	55	C11689	2222	53	C12234	2410	90	C13120	3957-6	84	C13189	3957-12	84
C11622	2222	55	C11690	2222	53	C12236	2410	90	C13121	3957-6	84	C13190	3957-12	84
C11623	2222	55	C11691	2222	53	C12238	2410	90	C13122	3957-6	84	C13191	3957-12	84
C11624	2222	55	C11692	2222	53	C12240	2410	90	C13123	3957-6	84	C13192	3957-12	84
C11625	2222	55	C11693	2222	53	C12241	2410	90	C13124	3957-6	84	C13193	3957-12	84
C11626	2222	55	C11694	2222	53	C12243	2410	90	C13125	3957-6	84	C13194	3957-12	84
C11627	2222	55	C11695	2222	53	C12247	2410	90	C13126	3957-6	84	C13195	3957-12	84
C11628	2222	55	C11696	2222	53	C12249	2410	90	C13127	3957-6	84	C13196	3957-12	84
C11629	2222	55	C11697	2222	53	C12250	2410	90	C13128	3957-6	84	C13197	3957-12	84

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C13198	3957-12	84	C14215	2175	17	C14283	2175	17	C14354	2175-TN	18	C14423	2175-TN	18
C13199	3957-12	84	C14216	2175	17	C14284	2175	17	C14355	2175-TN	18	C14424	2175-TN	18
C13200	3957-12	84	C14217	2175	17	C14286	2175	17	C14356	2175-TN	18	C14425	2175-TN	18
C13201	3957-12	84	C14218	2175	17	C14287	2175	17	C14357	2175-TN	18	C14426	2175-TN	18
C13202	3957-12	84	C14219	2175	18	C14288	2175	17	C14358	2175-TN	18	C14427	2175-TN	18
C13203	3957-12	84	C14220	2175	18	C14289	2175	17	C14359	2175-TN	18	C14428	2175-TN	16
C13204	3957-12	84	C14221	2175	18	C14290	2175	17	C14360	2175-TN	18	C14429	2175-TN	16
C13211	3957-12	84	C14222	2175	18	C14291	2175	17	C14361	2175-TN	18	C14430	2175-TN	16
C13218	3957-12	84	C14223	2175	18	C14292	2175	17	C14362	2175-TN	17	C14431	2175-TN	16
C13219	3957-12	84	C14224	2175	18	C14293	2175	17	C14363	2175-TN	17	C14432	2175-TN	16
C13220	3957-12	84	C14225	2175	18	C14294	2175	17	C14364	2175-TN	17	C14433	2175-TN	16
C13221	3957-12	84	C14226	2175	18	C14295	2175	17	C14365	2175-TN	17	C14434	2175-TN	16
C13222	3957-12	84	C14227	2175	18	C14296	2175	17	C14366	2175-TN	17	C14435	2175-TN	16
C13223	3957-12	84	C14228	2175	18	C14297	2175	17	C14367	2175-TN	17	C14436	2175-TN	16
C13224	3957-12	84	C14229	2175	18	C14298	2175	17	C14368	2175-TN	17	C14437	2175-TN	16
C13225	3957-12	84	C14230	2175	18	C14299	2175	18	C14369	2175-TN	17	C14438	2175-TN	16
C13226	3957-12	84	C14231	2175	18	C14300	2175	18	C14370	2175-TN	17	C14439	2175-TN	16
C13227	3957-12	84	C14232	2175	18	C14301	2175	18	C14371	2175-TN	17	C14499	3780	64
C13228	3957-12	84	C14233	2175	18	C14302	2175	18	C14372	2175-TN	17	C14499	3780	118
C13229	3957-12	84	C14234	2175	18	C14303	2175	18	C14373	2175-TN	17	C14501	2133	25
C13230	3957-12	84	C14235	2175	18	C14304	2175	18	C14374	2175-TN	17	C14502	2133	25
C13231	3957-12	84	C14236	2175	18	C14305	2175	18	C14375	2175-TN	17	C14504	2133	25
C13232	3957-12	84	C14237	2175	18	C14306	2175	18	C14376	2175-TN	17	C14505	2133	25
C13233	3957-12	84	C14238	2175	18	C14307	2175	16	C14377	2175-TN	17	C14508	2133	25
C13234	3957-12	84	C14239	2175	18	C14308	2175	16	C14378	2175-TN	17	C14509	2133	25
C13235	3957-12	84	C14240	2175	18	C14309	2175	16	C14379	2175-TN	16	C14513	2133	25
C13236	3957-12	84	C14241	2175	17	C14310	2175	16	C14380	2175-TN	16	C14515	2133	25
C13237	3957-12	84	C14242	2175	17	C14311	2175	16	C14381	2175-TN	16	C14519	2133	25
C13238	3957-12	84	C14243	2175	17	C14312	2175	16	C14382	2175-TN	16	C14521	2133	25
C13239	3957-12	83	C14244	2175	17	C14313	2175	16	C14383	2175-TN	16	C14523	2133	25
C13240	3957-12	83	C14245	2175	17	C14314	2175	16	C14384	2175-TN	16	C14526	2133	25
C13241	3957-12	83	C14246	2175	17	C14315	2175	16	C14385	2175-TN	16	C14528	2133	25
C13242	3957-12	83	C14247	2175	17	C14316	2175	16	C14386	2175-TN	16	C14531	2133	25
C13243	3957-12	83	C14248	2175	17	C14317	2175	16	C14387	2175-TN	16	C14533	2133	25
C13244	3957-12	83	C14249	2175	17	C14318	2175	16	C14388	2175-TN	16	C14535	2133	25
C13830	940E	92	C14250	2175	17	C14321	2175-TN	16	C14389	2175-TN	16	C14536	2133	25
C13831	940E	92	C14251	2175	17	C14322	2175-TN	16	C14390	2175-TN	16	C14539	2133	26
C13832	940E	92	C14252	2175	17	C14323	2175-TN	16	C14391	2175-TN	16	C14540	2133	26
C13833	940E	92	C14253	2175	17	C14324	2175-TN	16	C14392	2175-TN	16	C14543	2133	26
C13834	940E	92	C14254	2175	17	C14325	2175-TN	16	C14393	2175-TN	16	C14546	2133	26
C13835	940E	92	C14255	2175	17	C14326	2175-TN	16	C14395	2175-TN	16	C14549	2133	26
C13836	940E	92	C14256	2175	17	C14327	2175-TN	16	C14396	2175-TN	16	C14550	2133	26
C13837	940E	92	C14257	2175	17	C14328	2175-TN	16	C14397	2175-TN	16	C14552	2133	26
C13839	940E	92	C14258	2175	16	C14329	2175-TN	17	C14398	2175-TN	16	C14554	2133	26
C13840	940E	92	C14259	2175	16	C14330	2175-TN	17	C14399	2175-TN	16	C14556	2133	26
C13841	940E	92	C14260	2175	16	C14331	2175-TN	17	C14400	2175-TN	16	C14557	2133	26
C13842	940E	92	C14261	2175	16	C14332	2175-TN	17	C14401	2175-TN	16	C14559	2133	26
C13843	940E	92	C14262	2175	16	C14333	2175-TN	17	C14402	2175-TN	16	C14561	2133	26
C13844	940E	92	C14263	2175	16	C14334	2175-TN	17	C14403	2175-TN	17	C14562	2133	26
C13845	940E	92	C14264	2175	16	C14335	2175-TN	17	C14404	2175-TN	17	C14563	2133	26
C13847	940E	92	C14265	2175	16	C14336	2175-TN	17	C14405	2175-TN	17	C14565	2133	26
C13848	940E	92	C14266	2175	16	C14337	2175-TN	17	C14406	2175-TN	17	C14566	2133	26
C13849	940E	92	C14267	2175	16	C14338	2175-TN	17	C14407	2175-TN	17	C14568	2133	26
C14200	2175	16	C14268	2175	16	C14339	2175-TN	17	C14408	2175-TN	17	C14570	2133	26
C14201	2175	16	C14269	2175	16	C14340	2175-TN	18	C14409	2175-TN	17	C14572	2133	26
C14202	2175	16	C14270	2175	16	C14341	2175-TN	18	C14410	2175-TN	17	C14574	2133	26
C14203	2175	16	C14271	2175	16	C14342	2175-TN	18	C14411	2175-TN	17	C14577	2133	26
C14204	2175	16	C14272	2175	16	C14343	2175-TN	18	C14412	2175-TN	17	C14579	2133	26
C14205	2175	16	C14273	2175	16	C14344	2175-TN	18	C14413	2175-TN	17	C14580	2133	26
C14206	2175	16	C14274	2175	16	C14345	2175-TN	18	C14414	2175-TN	17	C14582	2133	26
C14207	2175	16	C14275	2175	16	C14346	2175-TN	18	C14415	2175-TN	17	C14584	2133	26
C14208	2175	17	C14276	2175	16	C14347	2175-TN	18	C14416	2175-TN	17	C14585	2133	26
C14209	2175	17	C14277	2175	16	C14348	2175-TN	18	C14417	2175-TN	17	C14587	2133	26
C14210	2175	17	C14278	2175	16	C14349	2175-TN	18	C14418	2175-TN	17	C14589	2133	26
C14211	2175	17	C14279	2175	16	C14350	2175-TN	18	C14419	2175-TN	17	C14590	2133	26
C14212	2175	17	C14280	2175	16	C14351	2175-TN	18	C14420	2175-TN	18	C14591	2133	26
C14213	2175	17	C14281	2175	17	C14352	2175-TN	18	C14421	2175-TN	18	C14593	2133	26
C14214	2175	17	C14282	2175	17	C14353	2175-TN	18	C14422	2175-TN	18	C14594	2133	26



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C14597	. 2133	26	C14731	. 2133	28	C14840	. 2133	26	C15079	. 2175-TA	18	C15147	. 2175-TA	17
C14599	. 2133	26	C14748	. 2133	25	C14841	. 2133	26	C15080	. 2175-TA	18	C15148	. 2175-TA	18
C14600	. 2133	26	C14749	. 2133-TC	25	C14842	. 2133	26	C15081	. 2175-TA	18	C15149	. 2175-TA	18
C14601	. 2133	26	C14750	. 2133-TC	26	C14843	. 2133	27	C15082	. 2175-TA	18	C15150	. 2175-TA	18
C14603	. 2133	26	C14751	. 2133-TC	26	C14844	. 2133	27	C15083	. 2175-TA	18	C15151	. 2175-TA	18
C14605	. 2133	26	C14752	. 2133-TC	26	C14846	. 2133-TC	25	C15084	. 2175-TA	18	C15152	. 2175-TA	18
C14607	. 2133	26	C14753	. 2133-TC	26	C14848	. 2133-TC	26	C15085	. 2175-TA	18	C15153	. 2175-TA	18
C14608	. 2133	26	C14754	. 2133-TC	26	C14850	. 2133-TC	26	C15086	. 2175-TA	18	C15154	. 2175-TA	18
C14610	. 2133	26	C14755	. 2133-TC	26	C14852	. 2133-TC	26	C15087	. 2175-TA	18	C15155	. 2175-TA	18
C14611	. 2133	27	C14756	. 2133-TC	26	C14854	. 2133-TC	26	C15088	. 2175-TA	18	C15250	. 2175-TC	16
C14613	. 2133	27	C14757	. 2133-TC	26	C14856	. 2133-TC	27	C15089	. 2175-TA	18	C15251	. 2175-TC	16
C14615	. 2133	27	C14758	. 2133-TC	26	C14858	. 2133-TC	27	C15090	. 2175-TA	18	C15252	. 2175-TC	16
C14616	. 2133	27	C14759	. 2133-TC	26	C14860	. 2133-TC	27	C15091	. 2175-TA	17	C15253	. 2175-TC	16
C14618	. 2133	27	C14760	. 2133-TC	26	C14861	. 2133-TC	27	C15092	. 2175-TA	17	C15254	. 2175-TC	16
C14620	. 2133	27	C14761	. 2133-TC	27	C14862	. 2133-TC	28	C15093	. 2175-TA	17	C15255	. 2175-TC	16
C14621	. 2133	27	C14762	. 2133-TC	27	C14863	. 2133-TC	28	C15094	. 2175-TA	17	C15256	. 2175-TC	16
C14622	. 2133	27	C14763	. 2133-TC	27	C14864	. 2133-TC	28	C15095	. 2175-TA	17	C15257	. 2175-TC	16
C14624	. 2133	27	C14764	. 2133-TC	27	C14865	. 2133-TC	28	C15096	. 2175-TA	17	C15258	. 2175-TC	17
C14626	. 2133	27	C14765	. 2133-TC	27	C14866	. 2133-TC	28	C15097	. 2175-TA	17	C15259	. 2175-TC	17
C14628	. 2133	27	C14766	. 2133-TC	27	C14867	. 2133-TC	28	C15098	. 2175-TA	17	C15260	. 2175-TC	17
C14630	. 2133	27	C14767	. 2133-TC	28	C14869	. 2133	27	C15099	. 2175-TA	17	C15261	. 2175-TC	17
C14632	. 2133	27	C14768	. 2133-TC	28	C14873	. 2513	76	C15100	. 2175-TA	17	C15262	. 2175-TC	17
C14634	. 2133	27	C14769	. 2133-TC	28	C14882	. 2513	76	C15101	. 2175-TA	17	C15263	. 2175-TC	17
C14637	. 2133	27	C14770	. 2133-TC	28	C14893	. 2513	76	C15102	. 2175-TA	17	C15264	. 2175-TC	17
C14638	. 2133	27	C14771	. 2133-TC	28	C14915	. 2513	76	C15103	. 2175-TA	17	C15265	. 2175-TC	17
C14640	. 2133	27	C14772	. 2133-TC	28	C14935	. 2513	76	C15104	. 2175-TA	17	C15266	. 2175-TC	17
C14642	. 2133	27	C14773	. 2133-TC	28	C14954	. 2513	76	C15105	. 2175-TA	17	C15267	. 2175-TC	17
C14644	. 2133	27	C14774	. 2133-TC	28	C14973	. 2513	76	C15106	. 2175-TA	17	C15268	. 2175-TC	17
C14646	. 2133	27	C14775	. 2133-TC	28	C14984	. 2513	76	C15107	. 2175-TA	17	C15269	. 2175-TC	18
C14649	. 2133	27	C14786	. 2133-TC	27	C14999	. 2513	76	C15108	. 2175-TA	16	C15270	. 2175-TC	18
C14651	. 2133	27	C14787	. 2133-TC	27	C15007	. 2513	76	C15109	. 2175-TA	16	C15271	. 2175-TC	18
C14653	. 2133	27	C14788	. 2133-TC	28	C15014	. 2513	76	C15110	. 2175-TA	16	C15272	. 2175-TC	18
C14654	. 2133	27	C14790	. 2133	26	C15028	. 2513	76	C15111	. 2175-TA	16	C15273	. 2175-TC	18
C14657	. 2133	27	C14800	. 2133	25	C15031	. 2513	76	C15112	. 2175-TA	16	C15274	. 2175-TC	18
C14659	. 2133	27	C14801	. 2133	26	C15034	. 2513	76	C15113	. 2175-TA	16	C15275	. 2175-TC	18
C14661	. 2133	27	C14802	. 2133	26	C15037	. 2513	76	C15114	. 2175-TA	16	C15276	. 2175-TC	18
C14664	. 2133	27	C14803	. 2133	26	C15039	. 2513	76	C15115	. 2175-TA	16	C15277	. 2175-TC	18
C14665	. 2133	27	C14804	. 2133	26	C15042	. 2513	76	C15116	. 2175-TA	16	C15278	. 2175-TC	18
C14667	. 2133	27	C14805	. 2133	26	C15044	. 2513	76	C15117	. 2175-TA	16	C15279	. 2175-TC	18
C14669	. 2133	27	C14806	. 2133	26	C15050	. 2175-TA	16	C15118	. 2175-TA	16	C15280	. 2175-TC	18
C14670	. 2133	28	C14807	. 2133	27	C15051	. 2175-TA	16	C15119	. 2175-TA	16	C15281	. 2175-TC	18
C14671	. 2133	27	C14808	. 2133	27	C15052	. 2175-TA	16	C15120	. 2175-TA	16	C15282	. 2175-TC	18
C14675	. 2133	27	C14809	. 2133	27	C15053	. 2175-TA	16	C15121	. 2175-TA	16	C15283	. 2175-TC	18
C14677	. 2133	28	C14810	. 2133	27	C15054	. 2175-TA	16	C15122	. 2175-TA	16	C15284	. 2175-TC	18
C14680	. 2133	28	C14811	. 2133	27	C15055	. 2175-TA	16	C15123	. 2175-TA	16	C15285	. 2175-TC	18
C14682	. 2133	28	C14812	. 2133	28	C15056	. 2175-TA	16	C15124	. 2175-TA	16	C15286	. 2175-TC	18
C14684	. 2133	28	C14813	. 2133	28	C15057	. 2175-TA	16	C15125	. 2175-TA	16	C15287	. 2175-TC	18
C14687	. 2133	28	C14814	. 2133	28	C15058	. 2175-TA	17	C15126	. 2175-TA	16	C15288	. 2175-TC	18
C14689	. 2133	28	C14815	. 2133	28	C15059	. 2175-TA	17	C15127	. 2175-TA	16	C15289	. 2175-TC	18
C14691	. 2133	28	C14816	. 2133	28	C15060	. 2175-TA	17	C15128	. 2175-TA	16	C15290	. 2175-TC	18
C14694	. 2133	28	C14817	. 2133	28	C15061	. 2175-TA	17	C15129	. 2175-TA	16	C15291	. 2175-TC	17
C14696	. 2133	28	C14818	. 2133	28	C15062	. 2175-TA	17	C15130	. 2175-TA	16	C15292	. 2175-TC	17
C14699	. 2133	28	C14819	. 2133	28	C15063	. 2175-TA	17	C15131	. 2175-TA	17	C15293	. 2175-TC	17
C14702	. 2133	28	C14820	. 2133	26	C15064	. 2175-TA	17	C15132	. 2175-TA	17	C15294	. 2175-TC	17
C14703	. 2133	28	C14821	. 2133	26	C15065	. 2175-TA	17	C15133	. 2175-TA	17	C15295	. 2175-TC	17
C14707	. 2133	28	C14822	. 2133	26	C15066	. 2175-TA	17	C15134	. 2175-TA	17	C15296	. 2175-TC	17
C14709	. 2133	28	C14823	. 2133	26	C15067	. 2175-TA	17	C15135	. 2175-TA	17	C15297	. 2175-TC	17
C14711	. 2133	28	C14824	. 2133	26	C15068	. 2175-TA	17	C15136	. 2175-TA	17	C15298	. 2175-TC	17
C14713	. 2133	28	C14825	. 2133	26	C15069	. 2175-TA	18	C15137	. 2175-TA	17	C15299	. 2175-TC	17
C14715	. 2133	28	C14826	. 2133	27	C15070	. 2175-TA	18	C15138	. 2175-TA	17	C15300	. 2175-TC	17
C14716	. 2133	28	C14827	. 2133	27	C15071	. 2175-TA	18	C15139	. 2175-TA	17	C15301	. 2175-TC	17
C14718	. 2133	28	C14828	. 2133	27	C15072	. 2175-TA	18	C15140	. 2175-TA	17	C15302	. 2175-TC	17
C14721	. 2133	28	C14829	. 2133	27	C15073	. 2175-TA	18	C15141	. 2175-TA	17	C15303	. 2175-TC	17
C14724	. 2133	28	C14830	. 2133	27	C15074	. 2175-TA	18	C15142	. 2175-TA	17	C15304	. 2175-TC	17
C14726	. 2133	28	C14831	. 2133	27	C15075	. 2175-TA	18	C15143	. 2175-TA	17	C15305	. 2175-TC	17
C14728	. 2133-TC	26	C14832	. 2133	28	C15076	. 2175-TA	18	C15144	. 2175-TA	17	C15306	. 2175-TC	17
C14729	. 2133	28	C14835	. 2133	25	C15077	. 2175-TA	18	C15145	. 2175-TA	17	C15307	. 2175-TC	17
C14730	. 2133-TC	26	C14838	. 2133	25	C15078	. 2175-TA	18	C15146	. 2175-TA	17	C15308	. 2175-TC	16

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C15309	2175-TC	16	C15561	2075	47	C15902	3780	62	C15970	3780	64	C16072	2565	78
C15310	2175-TC	16	C15562	2075	47	C15903	3780	62	C15971	3780	64	C16073	2565	79
C15311	2175-TC	16	C15563	2075	47	C15904	3780	62	C15972	3780	64	C16074	2565	79
C15312	2175-TC	16	C15564	2075	47	C15905	3780	62	C15973	3780	64	C16075	2565	79
C15313	2175-TC	16	C15565	2075	48	C15906	3780	62	C15974	3780	64	C16076	2565	79
C15314	2175-TC	16	C15566	2075	48	C15907	3780	62	C15975	3780	64	C16077	2565	79
C15315	2175-TC	16	C15567	2075	48	C15908	3780	62	C15976	3780	64	C16078	2565	79
C15316	2175-TC	16	C15568	2075	48	C15909	3780	62	C15977	3780	64	C16079	2565	79
C15317	2175-TC	16	C15569	2075	48	C15910	3780	62	C15978	3780	64	C16080	2565	79
C15318	2175-TC	16	C15570	2075	48	C15911	3780	62	C15979	3780	64	C16081	2565	79
C15319	2175-TC	16	C15571	2075	48	C15912	3780	62	C15980	3780	64	C16082	2565	79
C15320	2175-TC	16	C15572	2075	48	C15913	3780	62	C15981	3780	64	C16083	2565	79
C15321	2175-TC	16	C15573	2075	48	C15914	3780	62	C15982	3780	64	C16084	2565	79
C15322	2175-TC	16	C15574	2075	49	C15915	3780	62	C15983	3780	64	C16085	2565	79
C15323	2175-TC	16	C15575	2075	49	C15916	3780	62	C15984	3780	64	C16086	2565	79
C15324	2175-TC	16	C15576	2075	49	C15917	3780	62	C15985	3780	64	C16168	2065	45
C15325	2175-TC	16	C15577	2075	49	C15918	3780	62	C15986	3780	64	C16169	2065	45
C15326	2175-TC	16	C15580	2075	47	C15919	3780	62	C15987	3780	64	C16170	2065	45
C15327	2175-TC	16	C15581	2075	47	C15920	3780	62	C15988	3780	64	C16171	2065	45
C15328	2175-TC	16	C15582	2075	48	C15921	3780	62	C15989	3780	64	C16172	2065	45
C15329	2175-TC	16	C15583	2075	49	C15922	3780	63	C15990	3780	64	C16173	2065	45
C15330	2175-TC	16	C15650	2075	48	C15923	3780	63	C15991	3780	64	C16174	2065	45
C15331	2175-TC	17	C15651	2075	48	C15924	3780	63	C15992	3780	64	C16175	2065	45
C15332	2175-TC	17	C15652	2075	48	C15925	3780	63	C15993	3780	64	C16176	2065	45
C15333	2175-TC	17	C15653	2075	48	C15926	3780	63	C15994	3780	64	C16177	2065	45
C15334	2175-TC	17	C15654	2075	48	C15927	3780	63	C16029	2065	44	C16178	2065	45
C15335	2175-TC	17	C15655	2075	48	C15928	3780	63	C16030	2065	44	C16179	2065	45
C15336	2175-TC	17	C15656	2075	48	C15929	3780	63	C16031	2065	44	C16180	2065	45
C15337	2175-TC	17	C15657	2075	48	C15930	3780	63	C16032	2065	44	C16181	2065	45
C15338	2175-TC	17	C15658	2075	48	C15931	3780	63	C16033	2065	44	C16183	2065	45
C15339	2175-TC	17	C15659	2075	48	C15932	3780	63	C16034	2065	44	C16184	2065	45
C15340	2175-TC	17	C15660	2075	48	C15933	3780	63	C16035	2065	44	C16186	2065	44
C15341	2175-TC	17	C15661	2075	48	C15934	3780	63	C16036	2065	44	C16187	2065	44
C15342	2175-TC	17	C15662	2075	48	C15935	3780	63	C16037	2065	45	C16188	2065	44
C15343	2175-TC	17	C15663	2075	48	C15936	3780	63	C16038	2065	45	C16189	2065	44
C15344	2175-TC	17	C15664	2075	48	C15937	3780	63	C16039	2065	45	C16192	2065	44
C15345	2175-TC	17	C15665	2075	48	C15938	3780	63	C16040	2065	45	C16193	2065	44
C15346	2175-TC	17	C15666	2075	48	C15939	3780	63	C16041	2065	45	C16194	2065	44
C15347	2175-TC	17	C15667	2075	48	C15940	3780	63	C16042	2065	45	C16195	2065	44
C15348	2175-TC	18	C15668	2075	48	C15941	3780	63	C16043	2065	45	C16196	2065	44
C15349	2175-TC	18	C15669	2075	49	C15942	3780	63	C16044	2065	45	C16197	2065	44
C15350	2175-TC	18	C15670	2075	49	C15943	3780	63	C16045	2065	45	C16198	2065	44
C15351	2175-TC	18	C15671	2075	49	C15944	3780	63	C16046	2065	45	C16199	2065	44
C15352	2175-TC	18	C15672	2075	49	C15945	3780	63	C16047	2065	45	C16200	2065	44
C15353	2175-TC	18	C15673	2075	49	C15946	3780	63	C16048	2065	45	C16203	2065	44
C15354	2175-TC	18	C15674	2075	49	C15947	3780	63	C16049	2065	45	C16205	2065	44
C15355	2175-TC	18	C15880	3780	62	C15948	3780	63	C16050	2065	45	C16206	2065	44
C15540	2075	46	C15881	3780	62	C15949	3780	63	C16051	2065	45	C16207	2065	44
C15541	2075	46	C15882	3780	62	C15950	3780	63	C16052	2065	45	C16208	2065	44
C15542	2075	46	C15883	3780	62	C15951	3780	63	C16053	2065	45	C16209	2065	44
C15543	2075	46	C15884	3780	62	C15952	3780	63	C16054	2065	45	C16210	2065	44
C15544	2075	46	C15885	3780	62	C15953	3780	63	C16055	2065	45	C16212	2065	44
C15545	2075	46	C15886	3780	62	C15954	3780	63	C16056	2065	45	C16214	2065	44
C15546	2075	46	C15887	3780	62	C15955	3780	63	C16057	2065	45	C16216	2065	44
C15547	2075	46	C15888	3780	62	C15956	3780	63	C16058	2565	78	C16218	2065	44
C15548	2075	46	C15889	3780	62	C15957	3780	63	C16059	2565	78	C16219	2065	44
C15549	2075	46	C15890	3780	62	C15958	3780	63	C16060	2565	78	C16222	2565	78
C15550	2075	46	C15891	3780	62	C15959	3780	63	C16061	2565	78	C16226	2565	78
C15551	2075	46	C15892	3780	62	C15960	3780	63	C16062	2565	78	C16228	2565	78
C15552	2075	46	C15893	3780	62	C15961	3780	63	C16063	2565	78	C16229	2565	78
C15553	2075	46	C15894	3780	62	C15962	3780	63	C16064	2565	78	C16234	2565	78
C15554	2075	46	C15895	3780	62	C15963	3780	63	C16065	2565	78	C16235	2565	78
C15555	2075	47	C15896	3780	62	C15964	3780	63	C16066	2565	78	C16239	2565	78
C15556	2075	47	C15897	3780	62	C15965	3780	63	C16067	2565	78	C16240	2565	78
C15557	2075	47	C15898	3780	62	C15966	3780	63	C16068	2565	78	C16244	2565	78
C15558	2075	47	C15899	3780	62	C15967	3780	63	C16069	2565	78	C16245	2565	78
C15559	2075	47	C15900	3780	62	C15968	3780	63	C16070	2565	78	C16248	2565	78
C15560	2075	47	C15901	3780	62	C15969	3780	63	C16071	2565	78	C16249	2565	78

Index by Part Number

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C16811	2575	81	C16879	2575-TN	80	C16947	2075-TC	46	C19562	903	330	C23818	616	109
C16812	2575	81	C16880	2575-TN	80	C16948	2075-TC	46	C19570	903	330	C23819	616	109
C16813	2575	81	C16881	2575-TN	80	C16949	2075-TC	46	C19599	903	330	C23820	616	109
C16814	2575	81	C16882	2575-TN	80	C16950	2075-TC	47	C19622	903	330	C23821	616	109
C16815	2575	81	C16883	2575-TN	80	C16951	2075-TC	47	C19664	903	330	C23822	616	109
C16816	2575	81	C16884	2575-TN	80	C16952	2075-TC	47	C19703	903	330	C23823	616	109
C16817	2575	81	C16885	2575-TN	80	C16953	2075-TC	47	C19736	903	330	C23824	616	109
C16818	2575	81	C16886	2575-TN	80	C16954	2075-TC	47	C19766	903	330	C23957	618	109
C16819	2575	82	C16887	2575-TN	80	C16955	2075-TC	47	C19795	903	330	C23958	618	109
C16820	2575	82	C16888	2575-TN	80	C16956	2075-TC	47	C19880	3780-TC	62	C23959	618	109
C16821	2575	82	C16889	2575-TN	80	C16957	2075-TC	48	C19882	3780-TC	62	C23960	618	109
C16822	2575	82	C16890	2575-TN	81	C16958	2075-TC	48	C19885	3780-TC	62	C23961	618	109
C16823	2575	82	C16891	2575-TN	81	C16959	2075-TC	48	C19889	3780-TC	62	C23962	618	109
C16824	2575	82	C16892	2575-TN	81	C16960	2075-TC	48	C19890	3780-TC	62	C24167	2635	98
C16825	2575	82	C16893	2575-TN	81	C16961	2075-TC	48	C19892	3780-TC	62	C24168	2635	98
C16826	2575	82	C16894	2575-TN	81	C16962	2075-TC	48	C19895	3780-TC	62	C24169	2635	98
C16827	2575	82	C16895	2575-TN	81	C16963	2075-TC	48	C19896	3780-TC	62	C24170	2635	98
C16828	2575	82	C16896	2575-TN	81	C16964	2075-TC	48	C19900	3780-TC	62	C24171	2635	98
C16829	2575	82	C16897	2575-TN	81	C16965	2075-TC	48	C19901	3780-TC	62	C24172	2635	98
C16830	2575	82	C16898	2575-TN	81	C16966	2075-TC	48	C19902	3780-TC	62	C24173	2635 Set	98
C16831	2575	82	C16899	2575-TN	82	C16967	2075-TC	48	C19903	3780-TC	62	C24173	2635	119
C16832	2575	82	C16900	2575-TN	82	C16968	2075-TC	48	C19904	3780-TC	62	C24174	2635	98
C16833	2575-TN	81	C16901	2575-TN	82	C16969	2075-TC	49	C19909	3780-TC	62	C24175	2635	98
C16834	2575-TN	81	C16902	2575-TN	82	C16970	2075-TC	49	C19915	3780-TC	62	C24176	2635	98
C16835	2575-TN	81	C16903	2575-TN	82	C16971	2075-TC	49	C19916	3780-TC	62	C24177	2635	98
C16836	2575-TN	81	C16904	2575-TN	82	C16972	2075-TA	46	C19917	3780-TC	62	C24178	2635	98
C16837	2575-TN	81	C16905	2575-TN	82	C16973	2075-TA	46	C19919	3780-TC	62	C24179	2635	98
C16838	2575-TN	81	C16906	2575-TN	82	C16974	2075-TA	46	C19920	3780-TC	62	C24180	2635 Set	98
C16839	2575-TN	81	C16907	2575-TN	82	C16975	2075-TA	46	C19921	3780-TC	62	C24180	2635	119
C16840	2575-TN	81	C16908	2575-TN	82	C16976	2075-TA	46	C19922	3780-TC	63	C24181	2645	98
C16841	2575-TN	81	C16909	2575-TN	82	C16977	2075-TA	46	C19925	3780-TC	63	C24182	2645	98
C16842	2575-TN	81	C16910	2575-TN	82	C16978	2075-TA	46	C19927	3780-TC	63	C24183	2645	98
C16843	2575-TN	81	C16911	2575-TN	82	C16979	2075-TA	46	C19928	3780-TC	63	C24184	2645	98
C16844	2575-TN	81	C16912	2575-TN	82	C16980	2075-TA	47	C19929	3780-TC	63	C24185	2645	98
C16845	2575-TN	81	C16913	2575-TN	82	C16981	2075-TA	47	C19930	3780-TC	63	C24186	2645	98
C16846	2575-TN	81	C16914	2575-TN	80	C16982	2075-TA	47	C19931	3780-TC	63	C24187	2645 Set	98
C16847	2575-TN	81	C16915	2575-TN	80	C16983	2075-TA	47	C19933	3780-TC	63	C24187	2645	119
C16848	2575-TN	81	C16916	2575-TN	80	C16984	2075-TA	47	C19937	3780-TC	63	C24188	2645	98
C16849	2575-TN	81	C16917	2575-TN	80	C16985	2075-TA	47	C19939	3780-TC	63	C24189	2645	98
C16850	2575-TN	81	C16918	2575-TN	80	C16986	2075-TA	47	C19940	3780-TC	63	C24190	2645	98
C16851	2575-TN	81	C16919	2575-TN	81	C16987	2075-TA	48	C19942	3780-TC	63	C24191	2645	98
C16852	2575-TN	81	C16920	2575-TN	81	C16988	2075-TA	48	C19944	3780-TC	63	C24192	2645	98
C16853	2575-TN	81	C16921	2575-TN	81	C16989	2075-TA	48	C19949	3780-TC	63	C24193	2645	98
C16854	2575-TN	81	C16922	2575-TN	81	C16990	2075-TA	48	C19951	3780-TC	63	C24194	2645 Set	98
C16855	2575-TN	81	C16923	2575-TN	81	C16991	2075-TA	48	C19953	3780-TC	63	C24194	2645	119
C16856	2575-TN	81	C16924	2575-TN	81	C16992	2075-TA	48	C19955	3780-TC	63	C24229	650	110
C16857	2575-TN	81	C16925	2575-TN	81	C16993	2075-TA	48	C19956	3780-TC	63	C24230	650	110
C16858	2575-TN	81	C16926	2575-TN	81	C16994	2075-TA	48	C19957	3780-TC	63	C24231	650	110
C16859	2575-TN	81	C16927	2575-TN	81	C16995	2075-TA	48	C19958	3780-TC	63	C24232	650	110
C16860	2575-TN	81	C16928	2575-TN	82	C16996	2075-TA	48	C19959	3780-TC	63	C24233	650	110
C16861	2575-TN	80	C16929	2575-TN	82	C16997	2075-TA	48	C19960	3780-TC	63	C24234	650	110
C16862	2575-TN	80	C16930	2575-TN	82	C16998	2075-TA	48	C19962	3780-TC	63	C24235	650	110
C16863	2575-TN	80	C16931	2575-TN	82	C16999	2075-TA	49	C19965	3780-TC	63	C24236	650	110
C16864	2575-TN	80	C16932	2575-TN	82	C17000	2075-TA	49	C19968	3780-TC	63	C24237	650	110
C16865	2575-TN	80	C16933	2575-TN	82	C17001	2075-TA	49	C19969	3780-TC	63	C24238	650	110
C16866	2575-TN	80	C16934	2575-TN	82	C18805	2575-TA	80	C19970	3780-TC	64	C24239	650	110
C16867	2575-TN	80	C16935	2575-TN	82	C18807	2575-TA	80	C19971	3780-TC	64	C24240	650	110
C16868	2575-TN	80	C16936	2575-TN	82	C18810	2575-TA	80	C19974	3780-TC	64	C24241	650	110
C16869	2575-TN	80	C16937	2575-TN	82	C18812	2575-TA	80	C19976	3780-TC	64	C24242	650	110
C16870	2575-TN	80	C16938	2575-TN	82	C18815	2575-TA	80	C19981	3780-TC	64	C24243	650	110
C16871	2575-TN	80	C16939	2575-TN	82	C19271	902	330	C19987	3780-TC	64	C24244	650	110
C16872	2575-TN	80	C16940	2575-TN	82	C19288	902	330	C19994	3780-TC	64	C24245	650	110
C16873	2575-TN	80	C16941	2575-TN	82	C19335	902	330	C23812	616	109	C24250	657	111
C16874	2575-TN	80	C16942	2075-TC	46	C19355	902	330	C23813	616	109	C24251	657	111
C16875	2575-TN	80	C16943	2075-TC	46	C19377	902	330	C23814	616	109	C24252	657	111
C16876	2575-TN	80	C16944	2075-TC	46	C19398	902	330	C23815	616	109	C24253	657	111
C16877	2575-TN	80	C16945	2075-TC	46	C19416	902	330	C23816	616	109	C24254	657	111
C16878	2575-TN	80	C16946	2075-TC	46	C19449	902	330	C23817	616	109	C24255	657	111



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C24256	. 657	 111	C25171	. 4001	 102	C25550	. 4001	 104	C26176	. 2636	 97	C27689	. T-101	 159
C24257	. 657	 111	C25178	. 4001	 102	C25552	. 4001	 104	C26177	. 2636	 97	C27696	. T-101	 159
C24258	. 657	 111	C25180	. 4001	 102	C25566	. 4001	 104	C26178	. 2636	 97	C27697	. T-101	 159
C24259	. 657	 111	C25183	. 4001	 102	C25567	. 4001	 104	C26179	. 2636	 97	C27698	. T-101	 159
C24260	. 657	 111	C25185	. 4001	 102	C25577	. 4001	 104	C26180	. 2636 Set	 97	C27699	. T-101	 159
C24261	. 657	 111	C25187	. 4001	 102	C25585	. 4001	 104	C26180	. 2636	 119	C27700	. T-101	 159
C24262	. 657	 111	C25194	. 4001	 102	C25605	. 4001	 104	C26181	. 2646	 97	C27702	. T-101	 159
C24263	. 657	 111	C25203	. 4001	 102	C25608	. 4001	 104	C26182	. 2646	 97	C27703	. T-101	 159
C24264	. 657	 111	C25210	. 4001	 102	C25617	. 4001	 104	C26183	. 2646	 97	C27704	. T-101	 159
C24265	. 657	 111	C25212	. 4001	 102	C25622	. 4001	 104	C26184	. 2646	 97	C27708	. T-101	 159
C24271	. 659	 111	C25215	. 4001	 102	C25634	. 4001	 104	C26185	. 2646	 97	C27720	. T-101	 159
C24272	. 659	 111	C25216	. 4001	 102	C25655	. 4001	 104	C26186	. 2646	 97	C27723	. T-101	 159
C24273	. 659	 111	C25220	. 4001	 102	C25658	. 4001	 104	C26187	. 2646	 97	C27897	. B-101	 166
C24274	. 659	 111	C25226	. 4001	 102	C25660	. 4001	 104	C26187	. 2646	 119	C27898	. B-101	 166
C24275	. 659	 111	C25243	. 4001	 102	C25661	. 4001	 104	C26188	. 2646	 97	C27900	. B-101	 166
C24276	. 659	 111	C25253	. 4001	 103	C25663	. 4001	 104	C26189	. 2646	 97	C27902	. B-101	 166
C24277	. 659	 111	C25254	. 4001	 103	C25668	. 4001	 104	C26190	. 2646	 97	C27906	. B-101	 166
C24278	. 659	 111	C25262	. 4001	 103	C25669	. 4001	 104	C26191	. 2646	 97	C27910	. B-101	 166
C24279	. 659	 111	C25269	. 4001	 103	C25685	. 4001	 104	C26192	. 2646	 97	C27921	. B-101	 166
C24280	. 659	 111	C25275	. 4001	 103	C25698	. 4001	 104	C26193	. 2646	 97	C27922	. B-101	 166
C24281	. 659	 111	C25281	. 4001	 103	C25707	. 4001	 104	C26194	. 2646	 97	C27923	. B-101	 166
C24282	. 659	 111	C25285	. 4001	 103	C25723	. 4001	 104	C26194	. 2646	 119	C27926	. B-101	 166
C24283	. 659	 111	C25290	. 4001	 103	C25733	. 4001	 104	C26217	. 4001	 105	C27927	. B-101	 166
C24284	. 659	 111	C25291	. 4001	 103	C25742	. 4001	 104	C26218	. 4001	 105	C27928	. B-101	 166
C24285	. 659	 111	C25292	. 4001	 103	C25743	. 4001	 104	C26284	. 4001	 105	C27930	. B-101	 166
C24286	. 659	 111	C25297	. 4001	 103	C25764	. 4001	 104	C26351	. 4001	 105	C27931	. B-101	 166
C24292	. 655	 115	C25301	. 4001	 103	C25768	. 4001	 104	C26352	. 4001	 105	C27932	. B-101	 166
C24293	. 655	 115	C25313	. 4001	 103	C25789	. 4001	 104	C26418	. 4001	 105	C27933	. B-101	 166
C24294	. 655	 115	C25314	. 4001	 103	C25801	. 4001	 104	C26485	. 4001	 105	C27934	. B-101	 166
C24295	. 655	 115	C25322	. 4001	 103	C25804	. 4001	 104	C26550	. 4001	 105	C27935	. B-101	 166
C24982	. 642	 110	C25327	. 4001	 103	C25806	. 4001	 104	C26615	. 4001	 105	C28022	. CI-1000-TC	 153
C24983	. 642	 110	C25330	. 4001	 103	C25807	. 4001	 104	C26680	. 4001	 105	C28024	. CI-1000-TC	 153
C24984	. 642	 110	C25339	. 4001	 103	C25809	. 4001	 104	C26746	. 4001	 105	C28055	. CI-1000-TC	 153
C24985	. 642	 110	C25346	. 4001	 103	C25811	. 4001	 104	C26811	. 4001	 105	C28057	. CI-1000-TC	 153
C24986	. 642	 110	C25351	. 4001	 103	C25833	. 4001	 104	C26876	. 4001	 105	C29273	. 4030	 106
C24987	. 642	 110	C25357	. 4001	 103	C25844	. 4001	 104	C26941	. 4001	 105	C29311	. 4030	 106
C24988	. 642	 110	C25360	. 4001	 103	C25845	. 4001	 104	C27006	. 4001	 105	C29350	. 4030	 106
C24989	. 642	 110	C25362	. 4001	 103	C25858	. 4001	 104	C27072	. 4001	 105	C29386	. 4030	 106
C25003	. 4001	 102	C25365	. 4001	 103	C25873	. 4001	 104	C27137	. 4001	 105	C29421	. 4030	 106
C25005	. 4001	 102	C25366	. 4001	 103	C25878	. 4001	 104	C27144	. 4001	 105	C29457	. 4030	 106
C25008	. 4001	 102	C25368	. 4001	 103	C25892	. 4001	 104	C27152	. 4001	 105	C29493	. 4030	 106
C25010	. 4001	 102	C25369	. 4001	 103	C25911	. 4001	 104	C27159	. 4001	 105	C29565	. 4030	 106
C25019	. 4001	 102	C25374	. 4001	 103	C25912	. 4001	 104	C27166	. 4001	 105	C29601	. 4030	 106
C25020	. 4001	 102	C25380	. 4001	 103	C25942	. 4001	 104	C27180	. 4001	 105	C29637	. 4030	 106
C25034	. 4001	 102	C25385	. 4001	 103	C25944	. 4001	 104	C27195	. 4001	 105	C29709	. 4030	 106
C25041	. 4001	 102	C25392	. 4001	 103	C25946	. 4001	 104	C27636	. CI-1000	 153	C29745	. 4030	 106
C25053	. 4001	 102	C25397	. 4001	 103	C25947	. 4001	 104	C27637	. CI-1000	 153	C29803	. 4030	 106
C25059	. 4001	 102	C25402	. 4001	 103	C25949	. 4001	 104	C27638	. CI-1000	 153	C29853	. 4030	 106
C25060	. 4001	 102	C25404	. 4001	 103	C25981	. 4001	 104	C27639	. CI-1000	 153	C29890	. 4030	 106
C25063	. 4001	 102	C25408	. 4001	 103	C26014	. 4001	 104	C27640	. CI-1000	 153	C29925	. 4030	 106
C25072	. 4001	 102	C25417	. 4001	 103	C26015	. 4001	 104	C27641	. CI-1000	 153	C29960	. 4030	 106
C25079	. 4001	 102	C25426	. 4001	 103	C26048	. 4001	 104	C27642	. CI-1000	 153	C29997	. 4030	 106
C25087	. 4001	 102	C25438	. 4001	 103	C26080	. 4001	 105	C27644	. CI-1000	 153	C30033	. 4030	 106
C25094	. 4001	 102	C25443	. 4001	 103	C26083	. 4001	 105	C27646	. CI-1000	 153	C30067	. 4030	 106
C25095	. 4001	 102	C25459	. 4001	 103	C26085	. 4001	 105	C27655	. CI-1000	 153	C30134	. 4030	 106
C25100	. 4001	 102	C25473	. 4001	 103	C26086	. 4001	 105	C27656	. CI-1000	 153	C30168	. 4030	 106
C25101	. 4001	 102	C25474	. 4001	 103	C26150	. 4001	 105	C27657	. CI-1000	 153	C30201	. 4030	 106
C25108	. 4001	 102	C25475	. 4001	 103	C26151	. 4001	 105	C27658	. CI-1000	 153	C30235	. 4030	 106
C25110	. 4001	 102	C25483	. 4001	 103	C26167	. 2636	 97	C27660	. CI-1000	 153	C30268	. 4030	 106
C25120	. 4001	 102	C25492	. 4001	 103	C26168	. 2636	 97	C27661	. CI-1000	 153	C30335	. 4030	 106
C25128	. 4001	 102	C25501	. 4001	 103	C26169	. 2636	 97	C27667	. CI-1000	 153	C30402	. 4030	 106
C25139	. 4001	 102	C25508	. 4001	 103	C26170	. 2636	 97	C27668	. CI-1000	 153	C30469	. 4030	 106
C25140	. 4001	 102	C25510	. 4001	 103	C26171	. 2636	 97	C27669	. CI-1000	 153	C30536	. 4030	 106
C25146	. 4001	 102	C25512	. 4001	 103	C26172	. 2636	 97	C27670	. CI-1000	 153	C30603	. 4030	 106
C25151	. 4001	 102	C25513	. 4001	 104	C26173	. 2636 Set	 97	C27671	. CI-1000	 153	C30670	. 4030	 106
C25155	. 4001	 102	C25516	. 4001	 104	C26174	. 2636	 119	C27672	. CI-1000	 153	C30709	. RG8	 257
C25159	. 4001	 102	C25530	. 4001	 104	C26174	. 2636	 97	C27673	. CI-1000	 153	C30710	. RG8	 257
C25165	. 4001	 102	C25539	. 4001	 104	C26175	. 2636	 97	C27675	. CI-1000	 153	C30720	. RG9	 259

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C30721	RG9	259	C31071	RG8-TA	257	C31302	RG8-TC	257	C31958	PM-4	264	C32037	PM-4	264
C30722	RG9	259	C31072	RG8-TA	257	C31303	RG8-TC	257	C31959	PM-4	264	C32038	PM-4	264
C30723	RG9	259	C31074	RG8-TA	257	C31304	RG8-TC	257	C31960	PM-4	263	C32039	PM-4	264
C30724	RG9	259	C31075	RG8-TA	257	C31305	RG8-TC	257	C31961	PM-4	263	C32040	PM-4	264
C30725	RG9	259	C31076	RG8-TA	257	C31306	RG8-TC	257	C31962	PM-4	263	C32041	PM-4	264
C30732	RG8	257	C31087	RG6-TA	256	C31307	RG8-TC	257	C31963	PM-4	263	C32043	PM-4	264
C30733	RG6	256	C31098	RG6-TA	256	C31308	RG8-TC	257	C31964	PM-4	263	C32057	PM-4B	265
C30734	RG6	256	C31106	RG9-TC	259	C31313	RG8-TC	258	C31965	PM-4	263	C32058	PM-4B	265
C30735	4030	106	C31109	RG8-TA	257	C31314	RG8-TC	258	C31966	PM-4	263	C32059	PM-4B	265
C30780	RG9	259	C31111	RG8-TA	257	C31322	4030	106	C31967	PM-4	263	C32060	PM-4B	265
C30781	RG9	259	C31115	RG9-TC	259	C31337	4030	106	C31968	PM-4	263	C32061	PM-4B	265
C30782	RG9	259	C31117	RG9-TC	259	C31351	4030	106	C31969	PM-4	263	C32062	PM-4B	265
C30783	RG9	259	C31119	RG9-TC	259	C31365	4030	106	C31970	PM-4	263	C32063	PM-4B	265
C30785	RG9	259	C31121	RG9-TC	259	C31380	4030	106	C31972	PM-4	264	C32064	PM-4B	265
C30786	RG9	259	C31122	RG9-TC	259	C31879	PM-4DE	260	C31973	PM-4	264	C32065	PM-4B	265
C30787	RG9	259	C31160	RG6	256	C31880	PM-4DE	260	C31974	PM-4	264	C32066	HGA-2	236
C30788	RG9	259	C31161	RG6	256	C31881	PM-4DE	260	C31975	PM-4	264	C32210	PMRC-C	268
C30789	RG9	259	C31162	RG6	256	C31896	PM-4DE	260	C31976	PM-4	264	C32211	PMRC-C	268
C30790	RG9	259	C31163	RG6	256	C31903	PM-4DE	260	C31977	PM-4	264	C32212	PMRC-C	268
C30791	RG9	259	C31164	RG6	256	C31904	PM-4DE	260	C31978	PM-4	264	C32213	PMRC-C	268
C30800	4030	106	C31165	RG6	256	C31905	PM-4DE	260	C31979	PM-4	264	C32214	PMRC-C	268
C30826	RG6	256	C31166	RG6	256	C31906	PM-4DE	260	C31980	PM-4	264	C32215	PMRC-C	268
C30827	RG6	256	C31167	RG6	256	C31907	PM-4DE	260	C31981	PM-4	264	C32216	PMRC-C	268
C30828	RG6	256	C31168	RG6	256	C31908	PM-4DE	260	C31982	PM-4	264	C32217	PMRC-C	268
C30829	RG6	256	C31169	RG6	256	C31909	PM-4DE	260	C31983	PM-4	264	C32218	PMRC-C	268
C30830	RG6	256	C31173	RG8	257	C31910	PM-4DE	260	C31984	PM-4	264	C32219	PMRC-C	268
C30831	RG6	256	C31174	RG8	257	C31911	PM-4DE	260	C31987	PM-4	263	C32220	PMRC-C	268
C30832	RG6	256	C31175	RG8	257	C31912	PM-4DE	260	C31988	PM-4	263	C32221	PMRC-C	268
C30833	RG6	256	C31176	RG8	257	C31913	PM-4DE	260	C31989	PM-4	263	C32222	PMRC-C	268
C30834	RG6	256	C31177	RG8	257	C31915	PM-4DE	260	C31990	PM-4	263	C32223	PMRC-C	268
C30835	RG6	256	C31178	RG8	257	C31916	PM-4DE	260	C31991	PM-4	263	C32224	PMRC-C	268
C30836	RG6	256	C31179	RG8	257	C31918	PM-4DE	260	C31992	PM-4	263	C32225	PMRC-C	268
C30837	RG6	256	C31180	RG8	257	C31919	PM-4DE	260	C31993	PM-4	263	C32226	PMRC-C	268
C30838	RG6	256	C31181	RG8	257	C31921	PM-4DE	260	C31994	PM-4	263	C32227	PMRC-C	268
C30839	RG6	256	C31182	RG8	257	C31923	PM-4DE	260	C31995	PM-4	263	C32228	PMRC-C	268
C30840	RG6	256	C31183	RG8	257	C31924	PM-4	263	C31996	PM-4	263	C32229	PMRC-C	268
C30865	4030	106	C31184	RG8	257	C31925	PM-4	263	C31997	PM-4	263	C32230	PMRC-C	268
C30931	4030	106	C31190	RG8	257	C31926	PM-4	263	C31999	PM-4	264	C32231	PMRC-C	268
C30976	RG6-TC	256	C31191	4030	106	C31927	PM-4	263	C32000	PM-4	264	C32232	PMRC-C	268
C30977	RG6-TC	256	C31193	RG8	257	C31928	PM-4	263	C32001	PM-4	264	C32233	PMRC-C	268
C30978	RG6-TC	256	C31194	RG8	257	C31929	PM-4	263	C32002	PM-4	264	C32234	PMRC-C	268
C30979	RG6-TC	256	C31195	RG8	257	C31930	PM-4	264	C32003	PM-4	264	C32235	PMRC-C	268
C30980	RG6-TC	256	C31197	RG8	257	C31931	PM-4	264	C32004	PM-4	264	C32242	PMRC-C	268
C30981	RG6-TC	256	C31198	RG8	257	C31932	PM-4	264	C32005	PM-4	264	C32243	PMRC-C	268
C30982	RG6-TC	256	C31199	RG8	257	C31933	PM-4	264	C32006	PM-4	264	C32244	PMRC-C	268
C30983	RG6-TC	256	C31205	RG8	257	C31934	PM-4	264	C32007	PM-4	264	C32245	PMRC-C	268
C30984	RG6-TC	256	C31208	RG8	258	C31935	PM-4	264	C32008	PM-4	264	C32246	PMRC-C	268
C30985	RG6-TC	256	C31209	RG8	258	C31936	PM-4	264	C32009	PM-4	264	C32247	PMRC-C	268
C30986	RG6-TC	256	C31279	RG6-TC	256	C31937	PM-4	264	C32010	PM-4	264	C32248	PMRC-C	268
C30987	RG6-TC	256	C31280	RG6-TC	256	C31938	PM-4	264	C32011	PM-4	264	C32249	PMRC-C	268
C30988	RG6-TC	256	C31281	RG6-TC	256	C31939	PM-4	263	C32014	PM-4	263	C32250	PMRC-C	268
C30989	RG6-TC	256	C31282	RG6-TC	256	C31940	PM-4	263	C32015	PM-4	264	C32251	PMRC-C	268
C31044	RG6-TA	256	C31283	RG6-TC	256	C31941	PM-4	263	C32016	PM-4	263	C32252	PMRC-C	268
C31053	RG6-TA	256	C31284	RG6-TC	256	C31942	PM-4	263	C32017	PM-4	263	C32253	PMRC-C	268
C31054	RG6-TA	256	C31285	RG6-TC	256	C31943	PM-4	263	C32018	PM-4	263	C32254	PMRC-C	268
C31055	RG6-TA	256	C31286	RG6-TC	256	C31944	PM-4	263	C32019	PM-4	263	C32255	PMRC-C	268
C31056	RG6-TA	256	C31287	RG6-TC	256	C31945	PM-4	264	C32020	PM-4	264	C32256	PMRC-C	268
C31057	RG6-TA	256	C31291	RG8-TC	257	C31946	PM-4	264	C32021	PM-4	264	C32257	PMRC-C	268
C31058	RG6-TA	256	C31292	RG8-TC	257	C31947	PM-4	264	C32022	PM-4	264	C32258	PMRC-C	268
C31059	RG6-TA	256	C31293	RG8-TC	257	C31948	PM-4	264	C32023	PM-4	264	C32259	PMRC-C	268
C31060	RG6-TA	256	C31294	RG8-TC	257	C31949	PM-4	264	C32024	PM-4	264	C32260	PMRC-C	268
C31061	4030	106	C31295	RG8-TC	257	C31950	PM-4	264	C32025	PM-4	264	C32261	PMRC-C	268
C31063	RG6-TA	256	C31296	RG8-TC	257	C31951	PM-4	264	C32027	PM-4	264	C32262	PMRC-C	268
C31064	RG6-TA	256	C31297	RG8-TC	257	C31952	PM-4	264	C32032	PM-4	263	C32263	PMRC-C	268
C31065	RG8-TA	257	C31298	RG8-TC	257	C31953	PM-4	264	C32033	PM-4	263	C32264	PMRC-C	268
C31067	RG8-TA	257	C31299	RG8-TC	257	C31955	PM-4	264	C32034	PM-4	263	C32430	HPDM-2	237
C31069	RG8-TA	257	C31300	RG8-TC	257	C31956	PM-4	264	C32035	PM-4	263	C32431	HPDM-2	237
C31070	RG8-TA	257	C31301	RG8-TC	257	C31957	PM-4	264	C32036	PM-4	264	C32432	HPDM-2	237

Index by Part Number

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C32885	HDC-2	248	C32996	HDC-4C	249	C33095	HD-4C	226	C33174	HG-4C	240	C33245	HG-4C	239
C32886	HDC-2	248	C32997	HDC-4C	249	C33097	HD-4C	226	C33176	HG-4C	240	C33246	HG-4C	239
C32887	HDC-2	248	C32998	HDC-4C	249	C33099	HD-4C	226	C33177	HG-4C	240	C33247	HG-4C	239
C32888	HDC-2	248	C32999	HDC-4C	249	C33100	HD-4C	226	C33178	HG-4C	240	C33248	HG-4C	239
C32889	HDC-2	248	C33000	HDC-4C	249	C33101	HD-4C	226	C33179	HG-4C	240	C33249	HG-4C	239
C32890	HDC-2	248	C33001	HDC-4C	249	C33102	HD-4C	226	C33180	HG-4C	240	C33250	HG-4C	239
C32892	HDC-2	248	C33002	HDC-4C	249	C33103	HD-4C	226	C33181	HG-4C	240	C33251	HG-4C	239
C32894	HDC-2	248	C33003	HDC-4C	249	C33104	HD-4C	226	C33182	HG-4C	241	C33252	HG-4C	239
C32896	HDC-2	248	C33004	HDC-4C	249	C33105	HD-4C	226	C33183	HG-4C	241	C33253	HG-4C	239
C32898	HDC-2	248	C33005	HDC-4C	249	C33106	HD-4C	226	C33184	HG-4C	241	C33254	HG-4C	239
C32900	HDC-2	248	C33006	HDC-4C	249	C33107	HD-4C	226	C33185	HG-4C	241	C33255	HG-4C	239
C32904	HDC-2	248	C33028	HD-4C	226	C33108	HD-4C	226	C33186	HG-4C	241	C33256	HG-4C	239
C32905	HDC-2	248	C33029	HD-4C	226	C33109	HD-4C	226	C33187	HG-4C	241	C33257	HG-4C	239
C32906	HDC-2	248	C33030	HD-4C	226	C33110	HD-4C	226	C33188	HG-4C	239	C33258	HG-4C	239
C32907	HDC-2	248	C33031	HD-4C	226	C33111	HD-4C	226	C33189	HG-4C	239	C33259	HG-4C	240
C32908	HDC-2	248	C33032	HD-4C	226	C33112	HD-4C	226	C33190	HG-4C	239	C33260	HG-4C	240
C32909	HDC-2	248	C33033	HD-4C	226	C33113	HD-4C	226	C33191	HG-4C	239	C33261	HG-4C	240
C32910	HDC-2	248	C33034	HD-4C	226	C33114	HD-4C	226	C33192	HG-4C	239	C33262	HG-4C	240
C32911	HDC-2	248	C33035	HD-4C	226	C33115	HD-4C	226	C33193	HG-4C	239	C33263	HG-4C	240
C32912	HDC-2	248	C33036	HD-4C	226	C33116	HD-4C	226	C33194	HG-4C	239	C33264	HG-4C	240
C32927	HDC-4C	249	C33037	HD-4C	226	C33117	HD-4C	226	C33195	HG-4C	239	C33265	HG-4C	240
C32928	HDC-4C	249	C33038	HD-4C	226	C33118	HD-4C	226	C33196	HG-4C	239	C33266	HG-4C	240
C32929	HDC-4C	249	C33039	HD-4C	226	C33119	HD-4C	226	C33197	HG-4C	239	C33267	HG-4C	240
C32930	HDC-4C	249	C33040	HD-4C	226	C33120	HD-4C	226	C33198	HG-4C	239	C33268	HG-4C	240
C32931	HDC-4C	249	C33041	HD-4C	226	C33121	HD-4C	226	C33199	HG-4C	239	C33269	HG-4C	240
C32932	HDC-4C	249	C33042	HD-4C	226	C33122	HD-4C	226	C33200	HG-4C	239	C33270	HG-4C	240
C32933	HDC-4C	249	C33043	HD-4C	226	C33123	HD-4C	226	C33201	HG-4C	239	C33271	HG-4C	240
C32934	HDC-4C	249	C33044	HD-4C	226	C33124	HD-4C	226	C33202	HG-4C	240	C33272	HG-4C	240
C32935	HDC-4C	249	C33045	HD-4C	226	C33125	HD-4C	226	C33203	HG-4C	240	C33273	HG-4C	240
C32936	HDC-4C	249	C33046	HD-4C	226	C33126	HD-4C	226	C33204	HG-4C	240	C33274	HG-4C	240
C32937	HDC-4C	249	C33047	HD-4C	226	C33127	HD-4C	226	C33205	HG-4C	240	C33275	HG-4C	240
C32938	HDC-4C	249	C33048	HD-4C	226	C33128	HD-4C	226	C33206	HG-4C	240	C33276	HG-4C	240
C32939	HDC-4C	249	C33049	HD-4C	226	C33130	HD-4C	226	C33207	HG-4C	240	C33277	HG-4C	240
C32940	HDC-4C	249	C33051	HD-4C	226	C33132	HD-4C	226	C33208	HG-4C	240	C33278	HG-4C	240
C32941	HDC-4C	249	C33054	HD-4C	226	C33134	HD-4C	226	C33209	HG-4C	240	C33279	HG-4C	240
C32945	HDC-4C	249	C33057	HD-4C	226	C33136	HD-4C	226	C33210	HG-4C	240	C33281	HG-4C	240
C32949	HDC-4C	249	C33059	HD-4C	226	C33140	HD-4C	226	C33211	HG-4C	240	C33282	HG-4C	240
C32953	HDC-4C	249	C33060	HD-4C	226	C33141	HG-4C	239	C33212	HG-4C	240	C33283	HG-4C	240
C32957	HDC-4C	249	C33061	HD-4C	226	C33142	HG-4C	239	C33213	HG-4C	240	C33285	HG-4C	240
C32961	HDC-4C	249	C33062	HD-4C	226	C33143	HG-4C	239	C33214	HG-4C	240	C33286	HG-4C	240
C32965	HDC-4C	249	C33063	HD-4C	226	C33144	HG-4C	239	C33215	HG-4C	240	C33287	HG-4C	240
C32966	HDC-4C	249	C33064	HD-4C	226	C33145	HG-4C	239	C33216	HG-4C	240	C33288	HG-4C	240
C32967	HDC-4C	249	C33065	HD-4C	226	C33146	HG-4C	239	C33217	HG-4C	240	C33289	HG-4C	240
C32969	HDC-4C	249	C33066	HD-4C	226	C33147	HG-4C	239	C33218	HG-4C	240	C33290	HG-4C	240
C32972	HDC-4C	249	C33067	HD-4C	226	C33148	HG-4C	239	C33219	HG-4C	240	C33291	HG-4C	240
C32973	HDC-4C	249	C33068	HD-4C	226	C33149	HG-4C	239	C33221	HG-4C	240	C33292	HG-4C	241
C32974	HDC-4C	249	C33069	HD-4C	226	C33150	HG-4C	239	C33222	HG-4C	240	C33293	HG-4C	241
C32975	HDC-4C	249	C33070	HD-4C	226	C33151	HG-4C	239	C33223	HG-4C	240	C33294	HG-4C	241
C32976	HDC-4C	249	C33071	HD-4C	226	C33152	HG-4C	239	C33225	HG-4C	240	C33295	HG-4C	241
C32977	HDC-4C	249	C33072	HD-4C	226	C33153	HG-4C	239	C33226	HG-4C	240	C33296	HG-4C	241
C32978	HDC-4C	249	C33073	HD-4C	226	C33154	HG-4C	239	C33227	HG-4C	240	C33297	HG-4C	241
C32979	HDC-4C	249	C33074	HD-4C	226	C33155	HG-4C	240	C33228	HG-4C	240	C33298	HG-4C	241
C32980	HDC-4C	249	C33075	HD-4C	226	C33157	HG-4C	240	C33229	HG-4C	240	C33299	HG-4C	241
C32981	HDC-4C	249	C33076	HD-4C	226	C33158	HG-4C	240	C33230	HG-4C	240	C33300	HG-4C	241
C32982	HDC-4C	249	C33077	HD-4C	226	C33159	HG-4C	240	C33231	HG-4C	241	C33301	HG-4B	243
C32983	HDC-4C	249	C33078	HD-4C	226	C33160	HG-4C	240	C33232	HG-4C	241	C33302	HG-4B	243
C32984	HDC-4C	249	C33079	HD-4C	226	C33161	HG-4C	240	C33233	HG-4C	241	C33303	HG-4B	243
C32985	HDC-4C	249	C33080	HD-4C	226	C33162	HG-4C	240	C33234	HG-4C	241	C33304	HG-4B	243
C32986	HDC-4C	249	C33081	HD-4C	226	C33163	HG-4C	240	C33235	HG-4C	241	C33305	HG-4B	243
C32987	HDC-4C	249	C33082	HD-4C	226	C33164	HG-4C	240	C33236	HG-4C	241	C33306	HG-4B	243
C32988	HDC-4C	249	C33083	HD-4C	226	C33165	HG-4C	240	C33237	HG-4C	241	C33307	HG-4B	243
C32989	HDC-4C	249	C33084	HD-4C	226	C33166	HG-4C	240	C33238	HG-4C	241	C33308	HG-4B	243
C32990	HDC-4C	249	C33085	HD-4C	226	C33167	HG-4C	240	C33239	HG-4C	241	C33309	HG-4B	243
C32991	HDC-4C	249	C33086	HD-4C	226	C33168	HG-4C	240	C33240	HG-4C	239	C33310	HG-4B	243
C32992	HDC-4C	249	C33087	HD-4C	226	C33169	HG-4C	240	C33241	HG-4C	239	C33311	HG-4B	243
C32993	HDC-4C	249	C33089	HD-4C	226	C33170	HG-4C	240	C33242	HG-4C	239	C33313	HG-4B	243
C32994	HDC-4C	249	C33091	HD-4C	226	C33171	HG-4C	240	C33243	HG-4C	239	C33314	HG-4B	243
C32995	HDC-4C	249	C33093	HD-4C	226	C33173	HG-4C	240	C33244	HG-4C	239	C33315	HG-4B	243

Index by Part Number

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C33791	HG-2	229	C35258	4005	107	C38956	HG-2K	232	C39048	HD-2	222	C39136	HD-2B	224
C33792	HG-2	229	C35323	4005	107	C38957	HG-2K	232	C39049	HD-2	222	C39137	HD-2B	224
C33793	HG-2	229	C35389	4005	107	C38958	HG-2K	232	C39050	HD-2	222	C39138	HD-2B	224
C33794	HG-2	229	C35454	4005	107	C38959	HG-2K	232	C39051	HD-2	222	C39139	HD-2B	224
C33795	HG-2	229	C35461	4005	107	C38960	HG-2K	232	C39052	HD-2	222	C39140	HD-2B	224
C33796	HG-2	229	C35469	4005	107	C38961	HG-2K	232	C39053	HD-2	222	C39141	HD-2B	224
C33797	HG-2	229	C35476	4005	107	C38962	HG-2K	232	C39064	HG-2	227	C39142	HD-2B	224
C33798	HG-2	229	C35483	4005	107	C38963	HG-2K	232	C39065	HG-2	227	C39143	HD-2B	224
C33799	HG-2	229	C35490	4005	107	C38964	HG-2K	232	C39066	HG-2	227	C39144	HD-2B	224
C33800	HG-2	229	C35497	4005	107	C38965	HG-2K	232	C39067	HG-2	227	C39145	HD-2B	224
C33801	HG-2	229	C35505	4005	107	C38966	HG-2K	232	C39068	HG-2	227	C39146	HD-2B	224
C33802	HG-2	229	C35512	4005	107	C38967	HG-2K	232	C39069	HG-2	227	C39147	HD-2B	224
C33803	HG-2	227	C38900	HG-2	228	C38968	HG-2K	232	C39070	HG-2	227	C39148	HD-2B	224
C33804	HG-2	227	C38901	HG-2	228	C38969	HG-2K	232	C39071	HG-2	227	C39149	HD-2B	224
C33805	HG-2	227	C38902	HG-2	228	C38970	HG-2K	232	C39072	HG-2	228	C39150	HD-2B	224
C33806	HG-2	227	C38903	HG-2	228	C38971	HG-2K	232	C39073	HG-2	228	C39151	HD-2B	224
C33807	HG-2	227	C38904	HG-2	228	C38972	HG-2K	232	C39074	HG-2	228	C39152	HD-2B	224
C33808	HG-2	227	C38905	HG-2	229	C38973	HG-2K	232	C39075	HG-2	228	C39153	HD-2B	224
C33809	HG-2	227	C38906	HG-2	229	C38974	HG-2K	232	C39076	HG-2	228	C39154	HD-2B	224
C33810	HG-2	227	C38907	HG-2	229	C38975	HG-2K	232	C39077	HG-2	228	C39155	HD-2B	224
C33811	HG-2	227	C38908	HG-2	229	C38976	HG-2K	232	C39078	HG-2	227	C39156	HD-2B	224
C33812	HG-2	227	C38909	HG-2	229	C38977	HG-2K	232	C39079	HG-2	227	C39157	HD-2B	224
C33813	HG-2	227	C38910	HG-2	229	C38978	HG-2K	232	C39080	HG-2	227	C39158	HD-2B	224
C33814	HG-2	227	C38911	HG-2	229	C38979	HG-2K	232	C39081	HG-2	227	C39159	HD-2B	224
C33815	HG-2	227	C38912	HG-2	229	C38980	HG-2K	232	C39082	HG-2	227	C39160	HD-2B	224
C33816	HG-2	227	C38913	HG-2	229	C38981	HG-2K	232	C39083	HG-2	227	C39161	HD-2B	224
C33817	HG-2	227	C38914	HG-2	229	C38982	HGN-2	234	C39084	HG-2	227	C39162	HD-2B	224
C33818	HG-2	227	C38915	HG-2	229	C38983	HGN-2	234	C39085	HG-2	227	C39163	HD-2B	224
C33819	HG-2	227	C38916	HG-2	229	C38984	HGN-2	234	C39086	HG-2	227	C39164	HD-2B	224
C33820	HG-2	227	C38917	HG-2	229	C38985	HGN-2	234	C39087	HG-2	228	C39165	HD-2B	224
C33821	HG-2	227	C38918	HG-2	229	C39010	HG-2B	231	C39088	HG-2	228	C39166	HD-2B	224
C33822	HG-2	227	C38919	HG-2K	232	C39011	HG-2B	231	C39089	HG-2	228	C39167	HD-2B	224
C33823	HG-2	227	C38920	HG-2K	232	C39012	HG-2B	231	C39090	HG-2	228	C39168	HD-2B	224
C33824	HG-2	228	C38921	HG-2K	232	C39013	HG-2B	231	C39091	HG-2	228	C39169	HD-2B	224
C33825	HG-2	228	C38922	HG-2K	232	C39014	HG-2B	231	C39092	HG-2	228	C39170	HD-2B	224
C33826	HG-2	228	C38923	HG-2K	232	C39015	HG-2B	231	C39093	HG-2	228	C39171	HD-2B	224
C33827	HG-2	228	C38924	HG-2K	232	C39016	HG-2B	231	C39094	HG-2	228	C39172	HD-2B	224
C33828	HG-2	228	C38925	HG-2K	232	C39017	HG-2B	231	C39095	HG-2	228	C39173	HD-2B	224
C33829	HG-2	228	C38926	HG-2K	232	C39018	HG-2B	231	C39096	HG-2	228	C39174	HGN-2B	235
C33830	HG-2	228	C38927	HG-2K	232	C39019	HG-2B	231	C39097	HG-2	229	C39575	HD-3	225
C33831	HG-2	228	C38928	HG-2K	232	C39020	HG-2B	231	C39098	HG-2	229	C39576	HD-3	225
C33832	HG-2	228	C38929	HG-2K	232	C39021	HG-2B	231	C39100	HG-2	229	C39577	HD-3	225
C33833	HG-2	228	C38930	HG-2K	232	C39022	HG-2B	231	C39101	HG-2	229	C39578	HD-3	225
C33834	HG-2	228	C38931	HG-2K	232	C39023	HG-2B	231	C39103	HG-2	229	C39579	HD-3	225
C33835	HG-2	228	C38932	HG-2K	232	C39024	HG-2B	231	C39107	HG-2	227	C39580	HD-3	225
C33836	HG-2	228	C38933	HG-2K	232	C39025	HG-2B	231	C39108	HG-2	227	C39581	HD-3	225
C33837	HG-2	228	C38934	HG-2K	232	C39026	HG-2B	231	C39109	HG-2	227	C39582	HD-3	225
C33838	HG-2	228	C38935	HG-2K	232	C39027	HG-2B	231	C39110	HG-2	227	C39583	HD-3	225
C33839	HG-2	228	C38936	HG-2K	232	C39028	HG-2B	231	C39111	HG-2	227	C39584	HD-3	225
C33840	HG-2	228	C38937	HG-2K	232	C39029	HG-2B	231	C39112	HG-2	227	C39585	HD-3	225
C33841	HG-2	228	C38938	HG-2K	232	C39030	HG-2B	231	C39113	HG-2	227	C39587	HD-3	225
C33842	4005	107	C38939	HG-2K	232	C39031	HG-2B	231	C39114	HG-2	227	C39588	HD-3	225
C33986	4005	107	C38940	HG-2K	232	C39032	HG-2B	231	C39115	HG-2	227	C39589	HD-3	225
C34129	4005	107	C38941	HG-2K	232	C39033	HG-2B	231	C39116	HG-2	228	C39591	HD-3	225
C34266	4005	107	C38942	HG-2K	232	C39034	HG-2B	231	C39117	HG-2	228	C39593	HD-3	225
C34400	4005	107	C38943	HG-2K	232	C39035	HG-2B	231	C39118	HG-2	228	C39595	HD-3	225
C34467	4005	107	C38944	HG-2K	232	C39036	HG-2B	231	C39119	HG-2	228	C39596	HD-3	225
C34534	4005	107	C38945	HG-2K	232	C39037	HG-2B	231	C39120	HG-2	228	C39597	HD-3	225
C34601	4005	107	C38946	HG-2K	232	C39038	HG-2B	231	C39121	HG-2	228	C39598	HD-3	225
C34668	4005	107	C38947	HG-2K	232	C39039	HG-2B	231	C39122	HG-2	228	C39599	HD-3	225
C34735	4005	107	C38948	HG-2K	232	C39040	HG-2B	231	C39123	HG-2	228	C39600	HD-3	225
C34802	4005	107	C38949	HG-2K	232	C39041	HG-2B	231	C39124	HG-2	228	C39601	HD-3	225
C34867	4005	107	C38950	HG-2K	232	C39042	HG-2B	231	C39125	HG-2	228	C39602	HD-3	225
C34932	4005	107	C38951	HG-2K	232	C39043	HG-2B	231	C39126	HG-2	229	C39603	HD-3	225
C34997	4005	107	C38952	HG-2K	232	C39044	HD-2	222	C39128	HG-2	229	C39604	HD-3	225
C35063	4005	107	C38953	HG-2K	232	C39045	HD-2	222	C39129	HG-2	229	C39605	HD-3	225
C35128	4005	107	C38954	HG-2K	232	C39046	HD-2	222	C39130	HG-2	229	C39606	HD-3	225
C35193	4005	107	C38955	HG-2K	232	C39047	HD-2	222	C39132	HG-2	229	C39608	HD-3	225



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C39609	HD-3	225	C39700	HG-3	238	C39851	HMD-2	216	C40042	PM-538R	270	C40364	PM-539R	266
C39610	HD-3	225	C39701	HG-3	238	C39852	HMD-2	216	C40044	PM-538R	270	C40365	PM-539R	266
C39612	HD-3	225	C39702	HG-3	238	C39853	HMD-2	216	C40045	PM-538R	270	C40366	PM-539R	266
C39614	HD-3	225	C39703	HG-3	238	C39854	HMD-2	216	C40047	PM-538R	270	C40367	PM-539R	266
C39616	HD-3	225	C39704	HG-3	238	C39855	HMD-2	216	C40048	PM-538R	270	C40368	PM-539R	266
C39617	HD-3	225	C39705	HG-3	238	C39856	HMD-2	216	C40049	PM-538R	270	C40369	PM-539R	266
C39618	HD-3	225	C39706	HG-3	238	C39857	HMD-2	216	C40050	PM-538R	270	C40370	PM-539R	266
C39619	HD-3	225	C39707	HG-3	238	C39858	HMD-2	216	C40052	PM-538R	270	C40375	PM-539R	266
C39620	HD-3	225	C39708	HG-3	238	C39860	HMD-2	216	C40053	PM-538R	270	C40380	PM-539R	266
C39621	HD-3	225	C39709	HG-3	238	C39861	HMD-2	216	C40055	PM-538R	270	C40385	PM-539R	266
C39622	HD-3	225	C39710	HG-3	238	C39883	HMD-2	216	C40056	PM-538R	270	C40390	PM-539R	266
C39623	HD-3	225	C39711	HG-3	238	C39884	HMD-2	216	C40058	PM-538R	270	C40391	PM-539R	266
C39624	HD-3	225	C39712	HG-3	238	C39885	HMD-2	216	C40059	PM-538R	270	C40392	PM-539R	266
C39625	HD-3	225	C39713	HG-3	238	C39886	HMD-2	216	C40061	PM-538R	270	C40393	PM-539R	266
C39626	HD-3	225	C39714	HG-3	238	C39887	HMD-2	216	C40062	PM-538R	270	C40394	PM-539R	266
C39627	HD-3	225	C39715	HG-3	238	C39888	HMD-2	216	C40063	PM-538R	270	C40400	PM-538L	271
C39629	HD-3	225	C39716	HG-3	238	C39889	HMD-2	216	C40064	PM-538R	270	C40405	PM-538L	271
C39630	HD-3	225	C39717	HG-3	238	C39891	HMD-2	216	C40066	PM-538R	270	C40410	PM-538L	271
C39631	HD-3	225	C39718	HG-3	238	C39892	HMD-2	216	C40072	PM-539R	266	C40415	PM-538L	271
C39633	HD-3	225	C39719	HG-3	238	C39893	HMD-2	216	C40073	PM-539R	266	C40420	PM-538L	271
C39635	HD-3	225	C39720	HG-3	238	C39909	HMD-2	216	C40074	PM-539R	266	C40425	PM-538L	271
C39637	HD-3	225	C39721	HG-3	238	C39910	HMD-2	216	C40075	PM-539R	266	C40430	PM-538L	271
C39638	HG-3	238	C39722	HG-3	238	C39911	HMD-2	216	C40076	PM-539R	266	C40435	PM-538L	271
C39639	HG-3	238	C39731	HG-3	238	C39912	HMD-2	216	C40077	PM-539R	266	C40440	PM-538L	271
C39640	HG-3	238	C39732	HG-3	238	C39950	PM-3	262	C40078	PM-539R	266	C40505	HPDM-2	237
C39641	HG-3	238	C39733	HG-3	238	C39951	PM-3	262	C40079	PM-539R	266	C40506	HPDM-2	237
C39642	HG-3	238	C39734	HG-3	238	C39952	PM-3	262	C40080	PM-539R	266	C40507	HPDM-2	237
C39643	HG-3	238	C39735	HG-3	238	C39953	PM-3	262	C40081	PM-539R	266	C40508	HPDM-2	237
C39644	HG-3	238	C39736	HG-3	238	C39962	PM-3	262	C40082	PM-539R	266	C40509	HPDM-2	237
C39645	HG-3	238	C39737	HG-3	238	C39963	PM-3	262	C40083	PM-539R	266	C40510	HPDM-2	237
C39646	HG-3	238	C39738	HG-3	238	C39964	PM-3	262	C40084	PM-539R	266	C40511	HPDM-2	237
C39647	HG-3	238	C39739	HG-3	238	C39968	PM-4DE	260	C40085	PM-539R	266	C40512	HPDM-2	237
C39648	HG-3	238	C39740	HG-3	238	C39969	PM-4DE	260	C40086	PM-539R	266	C40514	HPDM-2	237
C39649	HG-3	238	C39741	HG-3	238	C39970	PM-4DE	260	C40087	PM-539R	266	C40516	HPDM-2	237
C39650	HG-3	238	C39742	HG-3	238	C39971	PM-4DE	260	C40295	PM-539L	267	C40518	HPDM-2	237
C39651	HG-3	238	C39743	HG-3	238	C39972	PM-4DE	260	C40296	PM-539L	267	C40519	HPDM-2	237
C39652	HG-3	238	C39744	HG-3	238	C39973	PM-4DE	260	C40297	PM-539L	267	C40520	HPDM-2	237
C39653	HG-3	238	C39745	HG-3	238	C39974	PM-4DE	260	C40298	PM-539L	267	C40521	HPDM-2	237
C39654	HG-3	238	C39753	HG-3	238	C40003	PM-538R	270	C40299	PM-539L	267	C40522	HPDM-2	237
C39655	HG-3	238	C39754	HG-3	238	C40004	PM-538R	270	C40300	PM-539L	267	C40523	HPDM-2	237
C39656	HG-3	238	C39755	HG-3	238	C40005	PM-538R	270	C40301	PM-539L	267	C40524	HPDM-2	237
C39657	HG-3	238	C39756	HG-3	238	C40006	PM-538R	270	C40305	PM-539L	267	C40525	HPDM-2	237
C39658	HG-3	238	C39757	HG-3	238	C40007	PM-538R	270	C40306	PM-539L	267	C40527	HPDM-2	237
C39659	HG-3	238	C39758	HG-3	238	C40008	PM-538R	270	C40310	PM-539L	267	C40529	HPDM-2	237
C39660	HG-3	238	C39759	HG-3	238	C40009	PM-538R	270	C40311	PM-539L	267	C40531	HPDM-2	237
C39669	HG-3	238	C39760	HG-3	238	C40010	PM-538R	270	C40315	PM-539L	267	C40792	PM-2	261
C39670	HG-3	238	C39761	HG-3	238	C40011	PM-538R	270	C40316	PM-539L	267	C40793	PM-2	261
C39671	HG-3	238	C39762	HG-3	238	C40012	PM-538R	270	C40320	PM-539L	267	C40794	PM-2	261
C39672	HG-3	238	C39763	HG-3	238	C40013	PM-538R	270	C40321	PM-539L	267	C40795	PM-2	261
C39673	HG-3	238	C39764	HG-3	238	C40014	PM-538R	270	C40345	PM-539R	266	C40796	PM-2	261
C39674	HG-3	238	C39765	HG-3	238	C40015	PM-538R	270	C40346	PM-539R	266	C40797	PM-2	261
C39675	HG-3	238	C39766	HG-3	238	C40016	PM-538R	270	C40347	PM-539R	266	C40798	PM-2	261
C39676	HG-3	238	C39767	HG-3	238	C40017	PM-538R	270	C40348	PM-539R	266	C40799	PM-2	261
C39677	HG-3	238	C39775	HG-3	238	C40018	PM-538R	270	C40349	PM-539R	266	C40800	PM-2	261
C39678	HG-3	238	C39776	HG-3	238	C40019	PM-538R	270	C40350	PM-539R	266	C40801	PM-2	261
C39679	HG-3	238	C39777	HG-3	238	C40020	PM-538R	270	C40351	PM-539R	266	C40802	PM-2	261
C39680	HG-3	238	C39778	HG-3	238	C40021	PM-538R	270	C40352	PM-539R	266	C40803	PM-2	261
C39681	HG-3	238	C39779	HG-3	238	C40022	PM-538R	270	C40353	PM-539R	266	C40804	PM-2	261
C39682	HG-3	238	C39780	HG-3	238	C40023	PM-538R	270	C40354	PM-539R	266	C40809	PM-2	261
C39683	HG-3	238	C39781	HG-3	238	C40024	PM-538R	270	C40355	PM-539R	266	C40810	PM-2	261
C39684	HG-3	238	C39782	HG-3	238	C40025	PM-538R	270	C40356	PM-539R	266	C40811	PM-2	261
C39685	HG-3	238	C39783	HG-3	238	C40026	PM-538R	270	C40357	PM-539R	266	C40812	PM-2	261
C39686	HG-3	238	C39784	HG-3	238	C40033	PM-538R	270	C40358	PM-539R	266	C40813	PM-2	261
C39687	HG-3	238	C39785	HG-3	238	C40035	PM-538R	270	C40359	PM-539R	266	C40814	PM-2	261
C39688	HG-3	238	C39786	HG-3	238	C40036	PM-538R	270	C40360	PM-539R	266	C40815	PM-2	261
C39689	HG-3	238	C39787	HG-3	238	C40038	PM-538R	270	C40361	PM-539R	266	C40816	PM-2	261
C39690	HG-3	238	C39788	HG-3	238	C40039	PM-538R	270	C40362	PM-539R	266	C40817	PM-2	261
C39691	HG-3	238	C39789	HG-3	238	C40041	PM-538R	270	C40363	PM-539R	266	C40818	PM-2	261

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C40819	PM-2	261	C40958	HMD-2	246	C41093	HMD-4	218	C41216	HD-4C	226	C41558	HG-2	229
C40820	PM-2	261	C40959	HMD-2	246	C41099	HMD-4	218	C41219	HD-4C	226	C41602	HG-2	227
C40821	PM-2	261	C40960	HMD-2	246	C41101	HMD-4	218	C41223	HD-4C	226	C41604	HG-2	227
C40826	PM-2	261	C40961	HMD-2	246	C41104	HMD-4	218	C41227	HD-4C	226	C41607	HG-2	227
C40827	PM-2	261	C40962	HMD-2	246	C41105	HMD-4	218	C41231	HD-4C	226	C41609	HG-2	227
C40828	PM-2	261	C40963	HMD-2	246	C41107	HMD-4	218	C41243	HG-4C	239	C41612	HG-2	227
C40829	PM-2	261	C40964	HMD-2	246	C41113	HMD-4	218	C41245	HG-4C	239	C41615	HG-2	227
C40830	PM-2	261	C40965	HMD-2	246	C41115	HMD-4	218	C41248	HG-4C	239	C41617	HG-2	228
C40831	PM-2	261	C40966	HMD-2	246	C41118	HMD-4	218	C41250	HG-4C	239	C41618	HG-2	228
C40832	PM-2	261	C40967	HMD-2	246	C41119	HMD-4	218	C41253	HG-4C	239	C41620	HG-2	228
C40833	PM-2	261	C40968	HMD-2	246	C41122	PMRF-C	269	C41254	HG-4C	240	C41622	HG-2	228
C40834	PM-2	261	C40969	HMD-4	247	C41123	PMRF-C	269	C41257	HG-4C	240	C41623	HG-2	228
C40835	PM-2	261	C40970	HMD-4	247	C41124	PMRF-C	269	C41260	HG-4C	240	C41625	HG-2	228
C40836	PM-2	261	C40971	HMD-4	247	C41125	PMRF-C	269	C41262	HG-4C	240	C41626	HG-2	228
C40837	PM-2	261	C40973	HMD-4	247	C41126	PMRF-C	269	C41264	HG-4C	240	C41628	HG-2	228
C40838	PM-2	261	C40979	HMD-4	247	C41127	PMRF-C	269	C41268	HG-4C	240	C41629	HG-2	228
C40843	HMG-2	219	C40980	HMD-4	247	C41128	PMRF-C	269	C41272	HG-4C	240	C41630	HG-2	228
C40844	HMG-2	219	C40981	HMD-4	247	C41130	PMRF-C	269	C41275	HG-4C	241	C41632	HG-2	228
C40845	HMG-2	219	C40983	HMD-4	247	C41131	PMRF-C	269	C41277	HG-4C	241	C41635	HG-2	228
C40846	HMG-2	219	C40984	HMD-4	247	C41132	PMRF-C	269	C41283	HG-4C	241	C41636	HG-2	228
C40847	HMG-2	219	C40985	HMD-4	247	C41133	PMRF-C	269	C41289	HG-4B	243	C41637	HG-2	228
C40848	HMG-2	219	C40986	HMD-4	247	C41134	PMRF-C	269	C41293	HG-4B	243	C41641	HG-2	229
C40849	HMG-2	219	C40987	HMD-4	247	C41135	PMRF-C	269	C41297	HG-4B	243	C41642	HG-2	229
C40850	HMG-2	219	C40988	HMD-4	247	C41136	PMRF-C	269	C41300	HG-4B	243	C41643	HG-2	229
C40851	HMG-2	219	C40994	HMD-4	247	C41137	PMRF-C	269	C41304	HG-4B	243	C41644	HG-2	229
C40852	HMG-2	219	C40995	HMD-4	247	C41138	PMRF-C	269	C41308	HG-4B	243	C41647	HG-2	229
C40853	HMG-2	219	C40996	HMD-4	247	C41139	PMRF-C	269	C41312	HG-4B	243	C41648	HG-2	229
C40876	HMG-4	221	C40997	HMD-4	247	C41140	PMRF-C	269	C41326	HG-4C	239	C41650	HG-2	229
C40877	HMG-4	221	C40998	HMD-4	247	C41145	PMRF-C	269	C41328	HG-4C	239	C41651	HG-2	229
C40878	HMG-4	221	C41001	HMD-2	216	C41146	PMRF-C	269	C41331	HG-4C	239	C41652	HG-2	229
C40879	HMG-4	221	C41003	HMD-2	216	C41147	PMRF-C	269	C41335	HG-4C	240	C41655	HG-2	229
C40880	HMG-4	221	C41005	HMD-2	216	C41148	PMRF-C	269	C41338	HG-4C	240	C41659	HG-2	229
C40881	HMG-4	221	C41006	HMD-2	216	C41149	PMRF-C	269	C41341	HG-4C	240	C41660	HG-2	229
C40882	HMG-4	221	C41008	HMD-2	216	C41150	PMRF-C	269	C41345	HG-4C	240	C41662	HG-2	229
C40884	HMG-4	221	C41010	HMD-2	216	C41151	PMRF-C	269	C41349	HG-4C	240	C41665	HG-2	229
C40903	HMD-2	246	C41012	HMD-2	216	C41153	PMRF-C	269	C41353	HG-4C	241	C41671	HG-2K	232
C40904	HMD-2	246	C41013	HMD-2	216	C41154	PMRF-C	269	C41358	HG-4B	243	C41673	HG-2K	232
C40905	HMD-2	246	C41014	HMD-2	216	C41155	PMRF-C	269	C41361	HG-4B	243	C41676	HG-2K	232
C40906	HMD-2	246	C41016	HMD-2	216	C41156	PMRF-C	269	C41364	HG-4B	243	C41678	HG-2K	232
C40907	HMD-2	246	C41017	HMD-2	216	C41157	PMRF-C	269	C41371	HG-4B	243	C41681	HG-2K	232
C40908	HMD-2	246	C41021	HMD-2B	217	C41158	PMRF-C	269	C41375	HG-4B	243	C41685	HG-2K	232
C40909	HMD-2	246	C41023	HMD-2B	217	C41159	PMRF-C	269	C41377	HG-4B	243	C41688	HG-2K	232
C40910	HMD-2	246	C41026	HMD-2B	217	C41160	PMRF-C	269	C41381	HG-4C	239	C41691	HG-2K	232
C40911	HMD-2	246	C41029	HMD-2B	217	C41161	PMRF-C	269	C41383	HG-4C	239	C41695	HG-2K	232
C40912	HMD-2	246	C41032	HMD-2	216	C41162	PMRF-C	269	C41386	HG-4C	239	C41699	HG-2K	232
C40913	HMD-2	246	C41034	HMD-2	216	C41163	PMRF-C	269	C41390	HG-4C	240	C41703	HG-2K	232
C40925	HMD-2	246	C41036	HMD-2	216	C41168	PMRF-C	269	C41393	HG-4C	240	C41709	HG-2K	232
C40926	HMD-2	246	C41037	HMD-2	216	C41169	PMRF-C	269	C41396	HG-4C	240	C41714	HG-2	227
C40927	HMD-2	246	C41039	HMD-2	216	C41170	PMRF-C	269	C41400	HG-4C	240	C41718	HG-2	228
C40928	HMD-2	246	C41041	HMD-2	216	C41171	PMRF-C	269	C41404	HG-4C	240	C41721	HG-2	228
C40929	HMD-2	246	C41043	HMD-2	216	C41172	PMRF-C	269	C41408	HG-4C	241	C41724	HG-2	228
C40930	HMD-2	246	C41044	HMD-2	216	C41173	PMRF-C	269	C41520	HG-4C	239	C41728	HG-2	228
C40931	HMD-2	246	C41045	HMD-2	216	C41174	PMRF-C	269	C41521	HG-4C	239	C41732	HG-2	229
C40932	HMD-2	246	C41047	HMD-2	216	C41176	PMRF-C	269	C41522	HG-4C	239	C41735	HG-2	229
C40933	HMD-2	246	C41048	HMD-2	216	C41177	PMRF-C	269	C41523	HG-4C	239	C41737	HG-2	229
C40934	HMD-2	246	C41053	HMD-2B	217	C41178	PMRF-C	269	C41524	HG-4C	239	C41738	HG-2	229
C40935	HMD-2	246	C41056	HMD-2B	217	C41180	PMRF-C	269	C41525	HG-4C	240	C41741	HG-2	229
C40936	HMD-2	246	C41060	HMD-2B	217	C41181	PMRF-C	269	C41526	HG-4C	240	C41747	HG-2	229
C40937	HMD-2	246	C41061	HMD-2B	217	C41182	PMRF-C	269	C41527	HG-4C	240	C41772	HGN-2	234
C40938	HMD-2	246	C41063	HMD-2B	217	C41183	PMRF-C	269	C41528	HG-4C	240	C41774	HGN-2	234
C40939	HMD-2	246	C41070	HMD-2	216	C41184	PMRF-C	269	C41550	HG-2	227	C41777	HGN-2	234
C40940	HMD-2	246	C41072	HMD-2	216	C41185	PMRF-C	269	C41551	HG-2	227	C41781	HGN-2	234
C40941	HMD-2	246	C41075	HMD-2	216	C41186	PMRF-C	269	C41552	HG-2	227	C41784	HGN-2	234
C40942	HMD-2	246	C41076	HMD-2	216	C41202	HD-4C	226	C41553	HG-2	227	C41787	HGN-2	234
C40943	HMD-2	246	C41085	HMD-4	218	C41204	HD-4C	226	C41554	HG-2	227	C41795	HGN-2	234
C40944	HMD-2	246	C41087	HMD-4	218	C41207	HD-4C	226	C41555	HG-2	228	C41799	HGN-2	234
C40945	HMD-2	246	C41090	HMD-4	218	C41209	HD-4C	226	C41556	HG-2	228	C41843	HGA-2	236
C40946	HMD-2	246	C41091	HMD-4	218	C41212	HD-4C	226	C41557	HG-2	228	C41845	HGA-2	236



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C41848	HGA-2	236	C42168	HGN-2B	235	C42719	HGC-4C	254	C43252	PM-538R	270	C44609	851	328
C41851	HGA-2	236	C42171	HGN-2B	235	C42720	HGC-4C	254	C43253	PM-538R	270	C44610	856	328
C41853	HGA-2	236	C42173	HGN-2B	235	C42726	HGC-4C	254	C43255	PM-538R	270	C44611	861	328
C41856	HGA-2	236	C42176	HGN-2B	235	C42727	HGC-4C	254	C43280	PM-4	263	C44616	851	328
C41859	HGA-2	236	C42179	HGN-2B	235	C42731	HGC-4C	254	C43281	PM-4	263	C44617	856	328
C41863	HGA-2	236	C42181	HGN-2B	235	C42778	HGC-4B	255	C43282	PM-4	263	C44618	861	328
C41867	HGA-2	236	C42184	HD-2B	224	C42780	HGC-4B	255	C43283	PM-4	263	C44619	851	328
C41888	HGA-2	236	C42186	HD-2B	224	C42783	HGC-4B	255	C43284	PM-4	263	C44620	856	328
C41890	HGA-2	236	C42189	HD-2B	224	C42785	HGC-4B	255	C43285	PM-4	263	C44621	861	328
C41893	HGA-2	236	C42191	HD-2B	224	C42788	HGC-4B	255	C43286	PM-4	264	C44622	851	328
C41896	HGA-2	236	C42194	HD-2B	224	C42792	HGC-4B	255	C43290	PM-4	263	C44623	856	328
C41898	HGA-2	236	C42197	HD-2B	224	C42795	HGC-4B	255	C43291	PM-4	263	C44624	861	328
C41901	HGA-2	236	C42199	HD-2B	224	C42798	HGC-4B	255	C43292	PM-4	263	C44625	851	328
C41904	HGA-2	236	C42202	HD-2B	224	C42799	HGC-4B	255	C43293	PM-4	264	C44626	856	328
C41911	HGA-2	236	C42205	HD-2B	224	C42806	HGC-4B	255	C43294	PM-4	264	C44627	861	328
C41930	HGA-2	236	C42212	HD-2B	224	C42807	HGC-4B	255	C43295	PM-4	264	C44628	851	328
C41932	HGA-2	236	C42500	PM-4	263	C42857	HGC-4C	253	C43296	PM-4	264	C44629	856	328
C41935	HGA-2	236	C42502	PM-4	263	C42861	HGC-4C	254	C43297	PM-4	264	C44630	861	328
C41939	HGA-2	236	C42504	PM-4	263	C42864	HGC-4C	254	C43299	PMRC-C	268	C44631	851	328
C41942	HGA-2	236	C42506	PM-4	263	C42867	HGC-4C	254	C43300	PMRC-C	268	C44632	856	328
C41945	HGA-2	236	C42508	PM-4	263	C42868	HGC-4C	254	C43301	PMRC-C	268	C44633	861	328
C41952	HGA-2	236	C42510	PM-4	264	C42875	HGC-4C	254	C43302	PMRC-C	268	C44634	851	328
C42051	HD-2	222	C42512	PM-4	264	C42876	HGC-4C	254	C43303	PMRC-C	268	C44635	856	328
C42052	HD-2	222	C42514	PM-4	264	C42880	HGC-4C	254	C43304	PMRC-C	268	C44636	861	328
C42054	HD-2	222	C42516	PM-4	264	C42881	HGC-4C	254	C43305	PMRC-C	268	C44637	851	328
C42055	HD-2	222	C42518	PM-4	264	C42913	HGC-4C	253	C43306	PMRC-C	268	C44638	856	328
C42056	HD-2	222	C42520	PM-4	264	C42917	HGC-4C	254	C44505	850	327	C44640	851	328
C42058	HD-2	222	C42550	PM-4B	265	C42920	HGC-4C	254	C44509	850	327	C44641	856	328
C42060	HD-2	222	C42552	PM-4B	265	C42923	HGC-4C	254	C44513	850	327	C44642	861	328
C42061	HD-2	222	C42554	PM-4B	265	C42924	HGC-4C	254	C44514	850	327	C44644	851	328
C42063	HD-2	222	C42556	PM-4B	265	C42931	HGC-4C	254	C44516	850	327	C44645	856	328
C42065	HD-2	222	C42558	PM-4B	265	C42932	HGC-4C	254	C44518	850	327	C44646	861	328
C42067	HD-2	222	C42560	PM-4B	265	C42936	HGC-4C	254	C44520	850	327	C44647	851	328
C42069	HD-2	222	C42562	PM-4B	265	C42937	HGC-4C	254	C44522	850	327	C44648	856	328
C42070	HD-2	222	C42564	PM-4B	265	C43208	PM-4	263	C44525	850	327	C44649	861	328
C42072	HD-2	222	C42566	PM-4B	265	C43209	PM-4	263	C44527	850	327	C44650	851	328
C42074	HD-2	222	C42602	HGC-2	250	C43210	PM-4	263	C44528	850	327	C44651	856	328
C42076	HD-2	223	C42604	HGC-2	250	C43211	PM-4	263	C44530	850	327	C44652	861	328
C42078	HD-2	223	C42607	HGC-2	250	C43212	PM-4	263	C44536	855	327	C44653	851	328
C42080	HD-2	223	C42609	HGC-2	250	C43213	PM-4	263	C44540	855	327	C44654	856	328
C42084	HD-2	223	C42612	HGC-2	250	C43214	PM-4	264	C44544	855	327	C44655	861	328
C42088	HD-2	223	C42616	HGC-2	250	C43215	PM-4	264	C44545	855	327	C44656	851	328
C42096	HD-2	222	C42619	HGC-2	250	C43216	PM-4	264	C44547	855	327	C44657	856	328
C42097	HD-2	222	C42622	HGC-2	251	C43217	PM-4	264	C44549	855	327	C44658	861	328
C42099	HD-2	222	C42629	HGC-2	251	C43218	PM-4	264	C44551	855	327	C44659	851	328
C42101	HD-2	222	C42633	HGC-2	251	C43219	PM-4	264	C44553	855	327	C44660	856	328
C42103	HD-2	222	C42643	HGC-2B	252	C43220	PM-4	264	C44556	855	327	C44661	861	328
C42109	HG-2B	231	C42645	HGC-2B	252	C43221	PM-4	264	C44558	855	327	C44671	3507	327
C42111	HG-2B	231	C42648	HGC-2B	252	C43222	PM-4	264	C44559	855	327	C44672	3507	327
C42114	HG-2B	231	C42650	HGC-2B	252	C43223	PM-4	264	C44561	855	327	C44673	3507	327
C42116	HG-2B	231	C42653	HGC-2B	252	C43224	PM-4	264	C44567	860	327	C44674	3507	327
C42119	HG-2B	231	C42657	HGC-2B	252	C43228	PMRC-C	268	C44571	860	327	C44675	3507	327
C42122	HG-2B	231	C42660	HGC-2B	252	C43229	PMRC-C	268	C44575	860	327	C44676	3507	327
C42124	HG-2B	231	C42663	HGC-2B	252	C43230	PMRC-C	268	C44576	860	327	C44677	3507	327
C42126	HG-2B	231	C42670	HGC-2B	252	C43231	PMRC-C	268	C44578	860	327	C44678	3507	327
C42128	HG-2B	231	C42684	HGC-4C	253	C43232	PMRC-C	268	C44580	860	327	C44679	3507	327
C42129	HG-2B	231	C42686	HGC-4C	253	C43233	PMRC-C	268	C44582	860	327	C44685	3517	328
C42132	HG-2B	231	C42689	HGC-4C	253	C43234	PMRC-C	268	C44584	860	327	C44686	3517	328
C42133	HG-2B	231	C42691	HGC-4C	253	C43235	PMRC-C	268	C44587	860	327	C44687	3517	328
C42137	HG-2B	231	C42694	HGC-4C	253	C43236	PMRC-C	268	C44589	860	327	C44689	3517	328
C42141	HG-2B	231	C42698	HGC-4C	254	C43237	PMRC-C	268	C44590	860	327	C44690	3517	328
C42144	HG-2B	231	C42699	HGC-4C	254	C43238	PMRC-C	268	C44592	860	327	C44692	3517	328
C42146	HG-2B	231	C42702	HGC-4C	254	C43239	PMRC-C	268	C44600	851	328	C44693	3517	328
C42152	HG-2B	231	C42703	HGC-4C	254	C43244	PM-538R	270	C44601	856	328	C44694	3517	328
C42158	HGN-2B	235	C42706	HGC-4C	254	C43246	PM-538R	270	C44602	861	328	C44696	3517	328
C42160	HGN-2B	235	C42707	HGC-4C	254	C43247	PM-538R	270	C44606	851	328	C44697	3517	328
C42163	HGN-2B	235	C42714	HGC-4C	254	C43249	PM-538R	270	C44607	856	328	C44701	852	329
C42165	HGN-2B	235	C42715	HGC-4C	254	C43250	PM-538R	270	C44608	861	328	C44702	857	329

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C44703	852	329	C45497	321	331	C46126	10001	99	C46219	610	100	C46548	879P	114
C44704	857	329	C45499	321	331	C46127	10001	99	C46222	610	100	C46549	879P	114
C44705	852	329	C45504	321	331	C46129	10001	99	C46223	610	100	C46550	879P	114
C44706	857	329	C45505	321	331	C46130	10001	99	C46224	610	100	C46551	879P	114
C44707	852	329	C45506	321	331	C46131	10001	99	C46225	610	100	C46553	879P	114
C44708	857	329	C45507	321	331	C46132	10001	99	C46261	998	94	C46554	879P	114
C44709	852	329	C45508	321	331	C46133	10001	99	C46262	998	94	C46555	879P	114
C44710	857	329	C45509	321	331	C46135	10001	99	C46263	998	94	C46556	879P	114
C44715	852	329	C45510	321	331	C46136	10001	99	C46264	998	94	C46557	879P	114
C44716	857	329	C45511	321	331	C46137	10001	99	C46265	998	94	C46558	879P	114
C44717	852	329	C45512	321	331	C46138	10001	99	C46266	998	94	C46560	879P	114
C44718	857	329	C45513	321	331	C46139	10001	99	C46267	998	94	C46565	879P	114
C44719	852	329	C45515	321	331	C46140	10001	99	C46268	998	94	C46566	879P	114
C44720	857	329	C45517	321	331	C46141	10001	99	C46269	998	94	C46569	879P	114
C44721	852	329	C45519	321	331	C46142	10001	99	C46270	998	94	C46570	879P	114
C44723	852	329	C45520	321	331	C46143	10001	99	C46272	996	94	C46571	879P	114
C44724	857	329	C45521	321	331	C46150	10003	99	C46273	996	94	C46572	879P	114
C44725	852	329	C45523	326	332	C46151	10003	99	C46274	996	94	C46573	879P	114
C44726	857	329	C45532	326	332	C46152	10003	99	C46275	996	94	C46576	879P	114
C44731	852	329	C45542	326	332	C46153	10003	99	C46276	996	94	C46578	879P	114
C44740	853	329	C45543	326	332	C46155	10003	99	C46277	996	94	C46579	879P	114
C44741	858	329	C45544	326	332	C46156	10003	99	C46278	996	94	C46580	879P	114
C44742	853	329	C45545	326	332	C46157	10003	99	C46279	996	94	C46583	879P	114
C44743	858	329	C45546	326	332	C46158	10003	99	C46314	879P	114	C46584	879P	114
C44744	853	329	C45547	326	332	C46159	10003	99	C46316	879P	114	C46585	879P	114
C44745	858	329	C45548	326	332	C46161	10003	99	C46421	879	112	C46586	879P	114
C44746	853	329	C45549	326	332	C46162	10003	99	C46422	879	112	C46587	879P	114
C44747	858	329	C45550	326	332	C46163	10003	99	C46423	879	112	C46592	879P	114
C44748	853	329	C45551	326	332	C46164	10003	99	C46424	879	112	C46593	879P	114
C45064	305	331	C45552	326	332	C46165	10003	99	C46425	879	112	C46594	879P	114
C45065	305	331	C45555	326	332	C46167	10003	99	C46426	879	112	C46597	879P	114
C45067	305	331	C45556	326	332	C46168	10003	99	C46427	879	112	C46598	879P	114
C45078	305	331	C45557	326	332	C46169	10003	99	C46428	879	112	C46599	879P	114
C45114	307	331	C45558	326	332	C46170	10003	99	C46429	879	112	C46600	879P	114
C45132	307	331	C45559	326	332	C46171	10003	99	C46430	879	112	C46605	879P	114
C45194	318	332	C45560	326	332	C46173	10003	99	C46431	879	112	C46612	879P	114
C45196	318	332	C45571	327	333	C46174	10003	99	C46432	879	112	C46613	879P	114
C45197	318	332	C45572	327	333	C46175	10003	99	C46433	879	112	C46614	879P	114
C45198	318	332	C45573	327	333	C46176	10003	99	C46434	879	112	C46620	879P	114
C45200	318	332	C45574	327	333	C46177	10003	99	C46435	879	112	C46621	879P	114
C45201	318	332	C45575	327	333	C46179	10003	99	C46436	879	112	C46622	879P	114
C45202	318	332	C45576	327	333	C46180	10003	99	C46437	879	112	C46629	879P	114
C45203	318	332	C45577	327	333	C46181	10003	99	C46438	879	112	C46630	879P	114
C45204	318	332	C45578	327	333	C46182	10003	99	C46439	879	112	C46639	879P	114
C45206	318	332	C45579	327	333	C46183	10003	99	C46440	879	112	C46645	879P	114
C45207	318	332	C45584	327	333	C46185	10003	99	C46441	879	112	C46647	879P	114
C45208	318	332	C46101	10001	99	C46186	10003	99	C46443	879	112	C46657	879P	114
C45210	318	332	C46102	10001	99	C46187	10003	99	C46445	879	112	C46658	879P	114
C45214	318	332	C46103	10001	99	C46188	10003	99	C46447	879	112	C46659	879P	114
C45215	318	332	C46104	10001	99	C46189	10003	99	C46448	879	112	C46669	879P	114
C45227	318	332	C46106	10001	99	C46190	10003	99	C46449	879	112	C46673	879P	114
C45233	318	332	C46107	10001	99	C46191	10003	99	C46520	879P	114	C46674	879P	114
C45238	318	332	C46108	10001	99	C46192	10003	99	C46522	879P	114	C46678	879P	114
C45241	318	332	C46109	10001	99	C46198	610	100	C46523	879P	114	C46679	879P	114
C45245	318	332	C46110	10001	99	C46199	610	100	C46525	879P	114	C46687	879P	114
C45308	318	332	C46112	10001	99	C46200	610	100	C46527	879P	114	C46716	879P	114
C45481	321	331	C46113	10001	99	C46201	610	100	C46528	879P	114	C46723	879P	114
C45482	321	331	C46114	10001	99	C46204	610	100	C46529	879P	114	C46886	884	113
C45483	321	331	C46115	10001	99	C46205	610	100	C46531	879P	114	C46888	884	113
C45485	321	331	C46116	10001	99	C46206	610	100	C46533	879P	114	C46890	884	113
C45486	321	331	C46118	10001	99	C46207	610	100	C46537	879P	114	C46891	884	113
C45487	321	331	C46119	10001	99	C46210	610	100	C46538	879P	114	C46892	884	113
C45488	321	331	C46120	10001	99	C46211	610	100	C46539	879P	114	C46893	884	113
C45489	321	331	C46121	10001	99	C46212	610	100	C46540	879P	114	C46894	884	113
C45490	321	331	C46122	10001	99	C46213	610	100	C46544	879P	114	C46896	884	113
C45492	321	331	C46123	10001	99	C46216	610	100	C46545	879P	114	C46898	884	113
C45494	321	331	C46124	10001	99	C46217	610	100	C46546	879P	114	C46900	884	113
C45495	321	331	C46125	10001	99	C46218	610	100	C46547	879P	114	C46902	884	113



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C46904 .	884 .	113	C50157 .	1730 .	101	C52772 .	1798 .	93	C54153 .	1001 .	148	C54321 .	1001 .	148
C46906 .	884 .	113	C50168 .	1730 .	101	C52773 .	1798 .	93	C54154 .	1002 .	148	C54322 .	1002 .	148
C46908 .	884 .	113	C50180 .	1730 .	101	C52774 .	1798 .	93	C54155 .	1003 .	148	C54323 .	1003 .	148
C46910 .	884 .	113	C50194 .	1730 .	101	C52775 .	1798 .	93	C54156 .	1004 .	148	C54324 .	1004 .	148
C47517 .	1727 .	67	C50203 .	1730 .	101	C52776 .	1798 .	93	C54164 .	1001 .	151	C54325 .	1002 .	148
C47519 .	1727 .	67	C50214 .	1730 .	101	C52777 .	1798 .	93	C54165 .	1002 .	151	C54326 .	1003 .	148
C47526 .	1727 .	67	C50226 .	1730 .	101	C53651 .	192 .	326	C54166 .	1003 .	151	C54327 .	1002 .	148
C47548 .	1727 .	67	C50368 .	4703 .	108	C53652 .	192 .	326	C54167 .	1004 .	151	C54328 .	1003 .	148
C47552 .	1727 .	67	C50382 .	4703 .	108	C53653 .	192 .	326	C54186 .	1002 .	148	C54329 .	1001 .	148
C47561 .	1727 .	67	C50391 .	4703 .	108	C53654 .	192 .	326	C54187 .	1003 .	148	C54330 .	1002 .	148
C47571 .	1727 .	67	C50402 .	4703 .	108	C53655 .	192 .	326	C54188 .	1001 .	148	C54331 .	1003 .	148
C47574 .	1727 .	67	C50414 .	4703 .	108	C53656 .	192 .	326	C54189 .	1002 .	148	C54332 .	1004 .	148
C47580 .	1727 .	67	C50423 .	4703 .	108	C53657 .	192 .	326	C54190 .	1003 .	148	C54343 .	1002 .	148
C47582 .	1727 .	67	C50428 .	4703 .	108	C53658 .	192 .	326	C54191 .	1004 .	148	C54348 .	1001 .	148
C47591 .	1727 .	67	C50433 .	4703 .	108	C53659 .	192 .	326	C54192 .	1001 .	148	C54349 .	1002 .	148
C47602 .	1727 .	67	C50438 .	4703 .	108	C53660 .	192 .	326	C54193 .	1002 .	148	C54350 .	1003 .	148
C47613 .	1727 .	67	C50443 .	4703 .	108	C53661 .	192 .	326	C54194 .	1003 .	148	C54351 .	1004 .	148
C47618 .	1727 .	67	C50449 .	4703 .	108	C53662 .	192 .	326	C54195 .	1004 .	148	C54352 .	1002 .	148
C47623 .	1727 .	68	C50459 .	4703 .	108	C53665 .	105 .	100	C54203 .	1001 .	151	C54353 .	1003 .	148
C47625 .	1727 .	68	C52151 .	HDC-2 .	248	C53666 .	105 .	100	C54204 .	1002 .	151	C54354 .	1002 .	149
C47634 .	1727 .	68	C52152 .	HDC-2 .	248	C53667 .	105 .	100	C54205 .	1003 .	151	C54355 .	1003 .	149
C47648 .	1727 .	68	C52153 .	HDC-2 .	248	C53668 .	105 .	100	C54215 .	1002 .	148	C54356 .	1001 .	149
C47671 .	1727 .	68	C52154 .	HDC-2 .	248	C54025 .	1001 .	148	C54216 .	1003 .	148	C54357 .	1002 .	149
C47694 .	1727 .	68	C52155 .	HDC-2 .	248	C54026 .	1002 .	148	C54217 .	1001 .	148	C54358 .	1003 .	149
C47708 .	1727 .	68	C52156 .	HDC-2 .	248	C54027 .	1003 .	148	C54218 .	1002 .	148	C54359 .	1004 .	149
C47718 .	1727 .	68	C52157 .	HDC-2 .	248	C54029 .	1002 .	148	C54219 .	1003 .	148	C54374 .	1001 .	151
C48655 .	2727 .	65	C52158 .	HDC-2 .	248	C54030 .	1003 .	148	C54220 .	1004 .	148	C54375 .	1002 .	151
C48675 .	2727 .	65	C52159 .	HDC-2 .	248	C54044 .	1002 .	151	C54221 .	1002 .	148	C54376 .	1003 .	151
C48697 .	2727 .	65	C52160 .	HDC-2 .	248	C54045 .	1003 .	151	C54222 .	1003 .	148	C54377 .	1004 .	151
C48707 .	2727 .	65	C52161 .	HDC-2 .	248	C54055 .	1001 .	148	C54223 .	1001 .	148	C54385 .	1001 .	149
C48718 .	2727 .	65	C52162 .	HDC-2 .	248	C54056 .	1002 .	148	C54224 .	1002 .	148	C54386 .	1002 .	149
C48736 .	2727 .	65	C52163 .	HDC-2 .	248	C54057 .	1003 .	148	C54225 .	1003 .	148	C54387 .	1003 .	149
C48758 .	2727 .	65	C52164 .	HDC-2 .	248	C54060 .	1001 .	148	C54226 .	1004 .	148	C54388 .	1004 .	149
C48769 .	2727 .	65	C52165 .	HDC-2 .	248	C54061 .	1002 .	148	C54232 .	1001 .	148	C54389 .	1001 .	149
C48784 .	2727 .	65	C52166 .	HDC-2 .	248	C54062 .	1003 .	148	C54233 .	1002 .	148	C54390 .	1002 .	149
C48799 .	2727 .	65	C52167 .	HDC-2 .	248	C54073 .	1001 .	151	C54234 .	1003 .	148	C54391 .	1003 .	149
C48812 .	2727 .	65	C52168 .	HDC-2 .	248	C54074 .	1002 .	151	C54235 .	1004 .	148	C54392 .	1004 .	149
C48818 .	2727 .	65	C52169 .	HDC-2 .	248	C54075 .	1003 .	151	C54246 .	1001 .	151	C54413 .	1001 .	151
C48823 .	2727 .	65	C52170 .	HDC-4C .	249	C54083 .	1001 .	148	C54247 .	1002 .	151	C54414 .	1002 .	151
C48828 .	2727 .	65	C52171 .	HDC-4C .	249	C54084 .	1002 .	148	C54248 .	1003 .	151	C54415 .	1003 .	151
C49017 .	2745 .	69	C52172 .	HDC-4C .	249	C54085 .	1003 .	148	C54249 .	1004 .	151	C54416 .	1004 .	151
C49029 .	2745 .	69	C52173 .	HDC-4C .	249	C54087 .	1002 .	148	C54256 .	1002 .	148	C54443 .	1001 .	149
C49041 .	2745 .	69	C52174 .	HDC-4C .	249	C54088 .	1003 .	148	C54264 .	1002 .	148	C54444 .	1002 .	149
C49052 .	2745 .	69	C52175 .	HDC-4C .	249	C54089 .	1001 .	148	C54265 .	1003 .	148	C54445 .	1003 .	149
C49064 .	2745 .	69	C52176 .	HDC-4C .	249	C54090 .	1002 .	148	C54267 .	1002 .	148	C54447 .	1004 .	149
C49078 .	2745 .	69	C52177 .	HDC-4C .	249	C54091 .	1003 .	148	C54268 .	1003 .	148	C54448 .	1001 .	149
C49087 .	2745 .	69	C52178 .	HDC-4C .	249	C54092 .	1004 .	148	C54269 .	1001 .	148	C54449 .	1002 .	149
C49098 .	2745 .	69	C52179 .	HDC-4C .	249	C54093 .	1001 .	148	C54270 .	1002 .	148	C54450 .	1003 .	149
C49110 .	2745 .	69	C52180 .	HDC-4C .	249	C54094 .	1002 .	148	C54271 .	1003 .	148	C54451 .	1002 .	149
C49119 .	2745 .	69	C52181 .	HDC-4C .	249	C54095 .	1003 .	148	C54272 .	1004 .	148	C54452 .	1004 .	149
C49121 .	2745 .	69	C52182 .	HDC-4C .	249	C54115 .	1001 .	148	C54273 .	1002 .	148	C54453 .	1001 .	149
C49124 .	2745 .	69	C52183 .	HDC-4C .	249	C54116 .	1002 .	148	C54274 .	1003 .	148	C54454 .	1002 .	149
C49129 .	2745 .	69	C52184 .	HDC-4C .	249	C54117 .	1003 .	148	C54275 .	1002 .	148	C54455 .	1003 .	149
C49134 .	2745 .	69	C52185 .	HDC-4C .	249	C54118 .	1004 .	148	C54276 .	1003 .	148	C54456 .	1002 .	149
C49139 .	2745 .	69	C52186 .	HDC-4C .	249	C54120 .	1001 .	148	C54277 .	1001 .	148	C54457 .	1003 .	149
C49145 .	2745 .	69	C52187 .	HDC-4C .	249	C54121 .	1002 .	148	C54278 .	1002 .	148	C54458 .	1002 .	149
C49155 .	2745 .	69	C52188 .	HDC-4C .	249	C54122 .	1003 .	148	C54279 .	1003 .	148	C54459 .	1003 .	149
C49272 .	PM-3 .	262	C52189 .	PM-4DE .	260	C54123 .	1004 .	148	C54280 .	1004 .	148	C54460 .	1004 .	149
C49275 .	PM-3 .	262	C52190 .	PM-4DE .	260	C54131 .	1001 .	151	C54289 .	1001 .	148	C54461 .	1002 .	149
C49277 .	PM-3 .	262	C52191 .	PM-4DE .	260	C54132 .	1002 .	151	C54290 .	1002 .	148	C54462 .	1003 .	149
C49278 .	PM-3 .	262	C52192 .	PM-4DE .	260	C54133 .	1003 .	151	C54291 .	1003 .	148	C54463 .	1002 .	149
C49283 .	PM-3 .	262	C52193 .	PM-4DE .	260	C54142 .	1002 .	148	C54292 .	1004 .	148	C54464 .	1002 .	149
C49284 .	PM-3 .	262	C52194 .	PM-4DE .	260	C54147 .	1002 .	148	C54303 .	1001 .	151	C54467 .	1002 .	149
C49285 .	PM-3 .	262	C52195 .	PM-4DE .	260	C54148 .	1003 .	148	C54304 .	1002 .	151	C54468 .	1003 .	149
C50103 .	1730 .	101	C52196 .	PM-4DE .	260	C54149 .	1001 .	148	C54305 .	1003 .	151	C54469 .	1001 .	149
C50121 .	1730 .	101	C52197 .	PM-4DE .	260	C54150 .	1002 .	148	C54307 .	1001-TN .	148	C54470 .	1002 .	149
C50133 .	1730 .	101	C52198 .	PM-4DE .	260	C54151 .	1003 .	148	C54309 .	1001-TN .	149	C54471 .	1003 .	149
C50145 .	1730 .	101	C52199 .	PM-4DE .	260	C54152 .	1004 .	148	C54318 .	1002 .	148	C54472 .	1002 .	149

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C54473	1003	149	C54666	1002	149	C54835	1003	151	C55114	1002-TN	149	C55308	1011TN	154
C54474	1002	149	C54667	1003	149	C54838	1001	150	C55116	1002-TN	149	C55309	1011TN	154
C54475	1003	149	C54675	1001	151	C54839	1002	150	C55118	1002-TN	149	C55310	1011TN	154
C54476	1004	149	C54676	1002	151	C54840	1003	150	C55120	1002-TN	149	C55311	1011TN	154
C54489	1001	151	C54677	1003	151	C54841	1004	150	C55122	1002-TN	149	C55312	1011TN	154
C54490	1002	151	C54689	1001	151	C54846	1001	150	C55124	1002-TN	149	C55313	1011TN	154
C54491	1003	151	C54690	1002	151	C54847	1002	150	C55126	1002-TN	149	C55315	1011TN	154
C54502	1002	149	C54691	1003	151	C54848	1003	150	C55128	1002-TN	149	C55316	1011TN	154
C54503	1003	149	C54692	1004	151	C54849	1004	150	C55130	1002-TN	149	C55317	1011TN	154
C54504	1001	149	C54721	0710M	184	C54857	1002	151	C55132	1002-TN	149	C55318	1011TN	155
C54505	1002	149	C54724	1002	149	C54858	1003	151	C55134	1002-TN	149	C55319	1011TN	155
C54506	1003	149	C54726	1001	149	C54864	1001	151	C55136	1002-TN	150	C55320	1011TN	155
C54507	1002	149	C54727	1002	149	C54865	1002	151	C55138	1002-TN	150	C55321	1011TN	155
C54508	1003	149	C54728	1003	149	C54866	1003	151	C55140	1002-TN	150	C55322	1011TN	155
C54509	1002	149	C54729	1002	149	C54867	1004	151	C55142	1002-TN	150	C55323	1011TN	155
C54510	1003	149	C54730	1003	149	C54884	1001	150	C55144	1002-TN	150	C55324	1011TN	155
C54511	1004	149	C54731	1004	149	C54885	1002	150	C55146	1002-TN	150	C55325	1011TN	155
C54512	1002	149	C54732	1002	149	C54886	1003	150	C55148	1002-TN	150	C55326	1011TN	155
C54513	1003	149	C54733	1003	149	C54887	1004	150	C55150	1002-TN	150	C55328	1011TN	155
C54514	1002	149	C54737	1001	149	C54890	1001	150	C55152	1002-TN	150	C55330	1011TN	155
C54518	1001	149	C54738	1002	149	C54891	1002	150	C55154	1002-TN	150	C55332	1011TN	155
C54519	1002	149	C54739	1003	149	C54892	1003	150	C55156	1002-TN	148	C55333	1011TN	155
C54520	1003	149	C54740	1002	149	C54893	1004	150	C55158	1002-TN	148	C55334	1011TN	155
C54521	1002	149	C54741	1004	149	C54907	1001	151	C55160	1002-TN	148	C55336	1011TN	155
C54522	1003	149	C54742	1002	149	C54908	1002	151	C55162	1002-TN	148	C55338	1011TN	155
C54523	1004	149	C54751	1001	151	C54909	1003	151	C55164	1002-TN	148	C55346	1011TN	154
C54524	1002	149	C54752	1002	151	C54923	1001	150	C55166	1002-TN	148	C55348	1011TN	154
C54525	1003	149	C54753	1003	151	C54924	1002	150	C55170	1002-TN	149	C55354	1011TN	155
C54536	1001	151	C54755	1001	151	C54925	1003	150	C55180	1002-TN	149	C55355	1011TN	155
C54537	1002	151	C54756	1002	151	C54926	1004	150	C55200	1003-TN	148	C55360	1011TN	156
C54538	1003	151	C54757	1003	151	C54928	1001	150	C55202	1003-TN	148	C55361	1011TN	156
C54539	1004	151	C54758	1004	151	C54929	1002	150	C55204	1003-TN	148	C55362	1011TN	156
C54546	1001	151	C54759	1001	150	C54930	1003	150	C55208	1003-TN	148	C55363	1011TN	156
C54547	1002	151	C54760	1002	150	C54933	1001	150	C55210	1003-TN	149	C55364	1011TN	156
C54548	1003	151	C54761	1003	150	C54934	1002	150	C55212	1003-TN	149	C55365	1011TN	156
C54580	1002	149	C54762	1004	150	C54935	1003	150	C55214	1003-TN	149	C55370	1011TC	154
C54581	1003	149	C54765	1001	150	C54936	1004	150	C55216	1003-TN	149	C55372	1011TC	154
C54582	1001	149	C54766	1002	150	C54965	1001	150	C55218	1003-TN	149	C55374	1011TC	154
C54583	1002	149	C54767	1003	150	C54966	1002	150	C55220	1003-TN	149	C55376	1011TC	154
C54584	1003	149	C54768	1004	150	C54967	1003	150	C55222	1003-TN	149	C55378	1011TC	154
C54585	1002	149	C54780	1002	150	C54971	1001	150	C55224	1003-TN	149	C55380	1011TC	154
C54586	1003	149	C54781	1003	150	C54972	1002	150	C55226	1003-TN	149	C55382	1011TC	154
C54587	1004	149	C54782	1004	150	C54973	1003	150	C55228	1003-TN	149	C55383	1011TC	154
C54588	1002	149	C54783	1002	150	C54991	1002	151	C55230	1003-TN	149	C55384	1011TC	154
C54589	1003	149	C54784	1003	150	C54994	1001	150	C55232	1003-TN	149	C55386	1011TC	154
C54595	1001	149	C54787	1001	150	C54995	1002	150	C55234	1003-TN	149	C55387	1011TC	155
C54596	1002	149	C54788	1002	150	C54996	1003	150	C55236	1003-TN	150	C55388	1011TC	155
C54597	1003	149	C54789	1003	150	C55000	1001	150	C55238	1003-TN	150	C55389	1011TC	155
C54598	1002	149	C54790	1004	150	C55001	1002	150	C55240	1003-TN	150	C55390	1011TC	155
C54599	1003	149	C54797	1001	151	C55002	1003	150	C55242	1003-TN	150	C55391	1011TC	155
C54600	1004	149	C54798	1002	151	C55028	1002	150	C55244	1003-TN	150	C55392	1011TC	155
C54617	1001	151	C54799	1003	151	C55031	1002	150	C55246	1003-TN	150	C55394	1011TC	155
C54618	1002	151	C54801	1001	151	C55032	1003	150	C55248	1003-TN	150	C55395	1011TC	155
C54619	1003	151	C54802	1002	151	C55057	1001	150	C55250	1003-TN	150	C55396	1011TC	155
C54624	1001	151	C54803	1003	151	C55058	1002	150	C55252	1003-TN	150	C55398	1011TC	155
C54625	1002	151	C54804	1004	151	C55059	1003	150	C55290	1011TN	154	C55415	1011TC	156
C54626	1003	151	C54813	1001	150	C55063	1001	150	C55292	1011TN	154	C55416	1011TC	156
C54627	1004	151	C54814	1002	150	C55064	1002	150	C55294	1011TN	154	C55417	1011TC	156
C54652	1001	149	C54815	1003	150	C55065	1003	150	C55296	1011TN	154	C55418	1011TC	156
C54653	1002	149	C54816	1004	150	C55090	1002	150	C55298	1011TN	154	C55419	1011TC	156
C54654	1003	149	C54817	1001	150	C55090	1002	188	C55299	1011TN	154	C55420	1011TC	156
C54656	1004	149	C54818	1002	150	C55100	1002-TN	148	C55300	1011TN	154	C55421	1011TC	156
C54658	1002	149	C54819	1003	150	C55102	1002-TN	148	C55302	1011TN	154	C55566	1094-TN	164
C54659	1003	149	C54820	1004	150	C55104	1002-TN	148	C55303	1011TN	154	C55570	1094-TN	164
C54661	1001	149	C54825	1001	151	C55106	1002-TN	148	C55304	1011TN	154	C55571	1093-TN	164
C54662	1002	149	C54826	1002	151	C55108	1002-TN	148	C55305	1011TN	154	C55572	1094-TN	164
C54663	1003	149	C54833	1001	151	C55110	1002-TN	149	C55306	1011TN	154	C55573	1093-TN	164
C54665	1004	149	C54834	1002	151	C55112	1002-TN	149	C55307	1011TN	154	C55575	1093-TN	164



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C55576	1094-TN	164	C57074	1011	154	C57226	1011	156	C58449	1096	165	C59209	1091	171
C55577	1093-TN	164	C57076	1011	154	C57228	1011	156	C58450	1095	165	C59210	1092	171
C55680	975TN	172	C57080	1011	156	C57230	1011	155	C58451	1096	165	C59221	1091	171
C55682	975TN	172	C57083	1011	154	C57232	1011	155	C58452	1095	165	C59222	1092	171
C55683	975TN	172	C57085	1011	154	C57234	1011	156	C58453	1096	165	C59223	1091	171
C55684	975TN	172	C57086	1012	158	C57236	1011	156	C58515	1093	164	C59224	1092	171
C55685	975TN	172	C57087	1011	154	C57246	1011	155	C58516	1094	164	C59235	1091	171
C55686	975TN	172	C57089	1011	154	C57247	1011	155	C58532	1093	164	C59236	1092	171
C55687	975TN	172	C57092	1011	156	C57253	1011	156	C58533	1094	164	C59237	1091	171
C56000	1002SO	148	C57094	1011	154	C57324	1053	157	C58538	1093	164	C59238	1092	171
C56002	1002SO	148	C57095	1011	154	C57338	1053	157	C58539	1094	164	C59249	1091	171
C56004	1002SO	148	C57097	1011	154	C57348	1053	157	C58544	1093	164	C59250	1092	171
C56006	1002SO	149	C57098	1012	158	C57361	1053	157	C58545	1094	164	C59251	1091	171
C56008	1002SO	149	C57099	1011	154	C57373	1053	157	C58546	1093	164	C59252	1092	171
C56010	1002SO	149	C57102	1011	154	C57380	1053	157	C58547	1094	164	C59256	1091	171
C56012	1002SO	149	C57104	1011	154	C57388	1053	157	C58562	1093	164	C59257	1092	171
C56014	1002SO	149	C57105	1012	158	C57403	1053	157	C58563	1094	164	C59258	1091	171
C56016	1002SO	149	C57106	1011	154	C57404	1053	157	C58564	1093	164	C59259	1092	171
C56020	1002SO	149	C57110	1011	156	C57406	1053	157	C58565	1094	164	C59282	1091	171
C56028	1002	150	C57112	1011	154	C57411	1053	157	C58570	1093	164	C59283	1092	171
C56050	1002TC	148	C57114	1011	154	C57415	1053	157	C58571	1094	164	C59284	1091	171
C56052	1002TC	148	C57118	1011	156	C57428	1053	157	C58572	1093	164	C59285	1092	171
C56054	1002-TN	148	C57127	1011	154	C57437	1053	157	C58573	1094	164	C59289	1091	171
C56056	1002TC	148	C57128	1011	154	C57452	1053	157	C58581	1093	164	C59290	1092	171
C56058	1002TC	148	C57129	1011	154	C57469	1053	157	C58582	1094	164	C59299	1091	171
C56060	1002TC	149	C57130	1011	154	C57492	1053	157	C58583	1093	164	C59300	1092	171
C56062	1002TC	149	C57131	1012	158	C57507	1053	157	C58584	1094	164	C59301	1091	171
C56064	1002TC	149	C57132	1011	154	C57555	1011	155	C58613	1093	164	C59302	1092	171
C56066	1002TC	149	C57133	1011	154	C57600	1011SO	154	C58614	1094	164	C59317	1091	171
C56070	1002TC	149	C57135	1011	154	C57602	1011SO	154	C58615	1093	164	C59318	1092	171
C56076	1002TC	149	C57137	1011	154	C57604	1011SO	154	C58616	1094	164	C59321	1091	171
C56700	965TN	172	C57138	1011	155	C57606	1011SO	154	C58800	1093	164	C59323	1091	171
C56701	965TN	172	C57139	1011	155	C57608	1011SO	154	C58801	1094	164	C59361	1091	171
C56702	965TN	172	C57140	1012	158	C57609	1011SO	154	C58804	1093	164	C59362	1092	171
C56703	965TN	172	C57146	1011	156	C57610	1011SO	154	C58805	1094	164	C59420	1091	171
C56704	965TN	172	C57149	1011	155	C57611	1011SO	154	C58806	1093	164	C59421	1092	171
C56705	965TN	172	C57150	1011	155	C57616	1011SO	154	C58807	1094	164	C59424	1091	171
C56706	965TN	172	C57151	1011	155	C57618	1011SO	154	C58808	1093	164	C59425	1092	171
C57001	1011SO	154	C57152	1011	155	C57619	1011SO	154	C58809	1094	164	C59428	1091	171
C57002	1011SO	154	C57153	1012	158	C57620	1011SO	154	C58810	1093	164	C59429	1092	171
C57009	1011	154	C57154	1011	155	C57622	1011SO	155	C58811	1094	164	C59432	1091	171
C57011	1011	154	C57155	1011	155	C57624	1011SO	155	C58812	1093	164	C59433	1092	171
C57012	1012	158	C57157	1011	155	C57625	1011SO	155	C58813	1094	164	C59436	1092	171
C57015	1011	156	C57160	1011	155	C57626	1011SO	155	C58815	1094	164	C59437	1092	171
C57019	1011	156	C57162	1012	158	C57628	1011SO	155	C58901	1094-TC	164	C59440	1092	171
C57022	1011	154	C57164	1011	155	C57630	1011SO	155	C58904	1093-TC	164	C59441	1092	171
C57023	1011	154	C57168	1011	156	C57632	1011SO	155	C58905	1094-TC	164	C60001	CEM-V-4R	272
C57024	1011	154	C57171	1011	156	C57636	1011SO	155	C58906	1093-TC	164	C60002	CEM-V-4R	272
C57027	1011	156	C57175	1011	155	C57638	1011SO	155	C58907	1094-TC	164	C60003	CEM-V-4R	272
C57031	1011	154	C57176	1011	155	C57640	1011SO	155	C58908	1093-TC	164	C60004	CEM-V-4R	272
C57032	1012	158	C57177	1011	155	C57642	1011SO	155	C58909	1094-TC	164	C60005	CEM-V-4R	272
C57033	1011	154	C57179	1011	155	C57644	1011SO	155	C58910	1093-TC	164	C60006	CEM-V-4R	272
C57036	1011	156	C57180	1011	155	C58432	1095	165	C58911	1094-TC	164	C60007	CEM-V-4R	272
C57038	1011	154	C57181	1011	155	C58433	1096	165	C58912	1093-TC	164	C60008	CEM-V-4R	272
C57041	1011	154	C57182	1011	155	C58434	1095	165	C58913	1094-TC	164	C60009	CEM-V-4R	272
C57044	1011	156	C57187	1011	156	C58435	1096	165	C59106	1011E	158	C60010	CEM-V-4R	272
C57047	1011	154	C57189	1011	156	C58436	1095	165	C59109	1011E	158	C60011	CEM-V-4R	272
C57048	1011	154	C57191	1011	155	C58437	1096	165	C59110	1011E	158	C60012	CEM-V-4R	272
C57049	1012	158	C57192	1011	155	C58438	1095	165	C59117	1011E	158	C60013	CEM-V-4R	272
C57051	1011	154	C57193	1011	155	C58439	1096	165	C59118	1011E	158	C60014	CEM-V-4R	272
C57055	1011	156	C57195	1011	155	C58440	1095	165	C59121	1011E	158	C60015	CEM-V-4R	272
C57062	1011	154	C57196	1011	155	C58441	1096	165	C59122	1011E	158	C60016	CEM-V-4R	272
C57063	1012	158	C57199	1011	156	C58442	1095	165	C59126	1011E	158	C60017	CEM-V-4R	272
C57067	1011	156	C57203	1011	156	C58443	1096	165	C59127	1011E	158	C60018	CEM-V-4R	272
C57069	1011	154	C57214	1011	155	C58444	1095	165	C59159	1092	171	C60019	CEM-V-4R	272
C57070	1011	154	C57215	1011	155	C58445	1096	165	C59177	1092	171	C60020	CEM-V-4R	272
C57072	1011	154	C57216	1011	155	C58447	1096	165	C59193	1091	171	C60021	CEM-V-4R	272
C57073	1012	158	C57220	1011	155	C58448	1095	165	C59194	1092	171	C60022	CEM-V-4R	272

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C60023	CEM-V-4R	272	C60091	CEM-V-4R	274	C60229	CEM-CH4D	305	C60418	CEM-EMS-5	280	C60493	CEM-AM2	281
C60024	CEM-V-4R	272	C60092	CEM-V-4R	274	C60230	CEM-CH4D	305	C60419	CEM-EMS-5	280	C60494	CEM-AM2	281
C60025	CEM-V-4R	272	C60093	CEM-V-4R	274	C60231	CEM-CH4D	305	C60420	CEM-EMS-5	280	C60495	CEM-AM2	281
C60026	CEM-V-4R	272	C60094	CEM-V-4R	274	C60269	CEM-DE4	287	C60421	CEM-EMS-5	280	C60496	CEM-AM2	281
C60027	CEM-V-4R	272	C60095	CEM-V-4R	274	C60270	CEM-DE4	287	C60422	CEM-EMS-5	280	C60497	CEM-AM2	281
C60028	CEM-V-4R	272	C60096	CEM-V-4R	274	C60271	CEM-DE4	287	C60423	CEM-EMS-5	280	C60498	CEM-AM2	281
C60029	CEM-V-4R	272	C60097	CEM-V-4R	274	C60272	CEM-DE4	287	C60424	CEM-EMS-5	280	C60499	CEM-AM2	281
C60030	CEM-V-4R	272	C60098	CEM-V-4R	274	C60273	CEM-DE4	287	C60425	CEM-EMS-5	280	C60500	CEM-AM2	281
C60031	CEM-V-4R	272	C60100	CEM-HPDE-5	278	C60274	CEM-DE4	287	C60426	CEM-EMS-5	280	C60501	CEM-AM2	281
C60032	CEM-V-4R	272	C60101	CEM-HPDE-5	278	C60275	CEM-DE4	287	C60427	CEM-EMS-5	280	C60502	CEM-AM2	281
C60033	CEM-V-4R	272	C60102	CEM-HPDE-5	278	C60276	CEM-DE4	287	C60428	CEM-EMS-5	280	C60503	CEM-AM2	281
C60034	CEM-V-4R	272	C60103	CEM-HPDE-5	278	C60277	CEM-DE4	287	C60429	CEM-EMS-5	280	C60504	CEM-AM2	281
C60035	CEM-V-4R	273	C60104	CEM-HPDE-5	278	C60278	CEM-DE4	287	C60430	CEM-EMS-5	280	C60505	CEM-AM2	281
C60036	CEM-V-4R	273	C60105	CEM-HPDE-5	278	C60279	CEM-DE4	287	C60431	CEM-EMS-5	280	C60506	CEM-AM2	281
C60037	CEM-V-4R	273	C60106	CEM-HPDE-5	278	C60280	CEM-DE4	287	C60432	CEM-EMS-5	280	C60507	CEM-AM2	281
C60038	CEM-V-4R	273	C60108	CEM-V-4B	275	C60281	CEM-DE4	287	C60433	CEM-EMS-5	280	C60508	CEM-AM2	281
C60039	CEM-V-4R	273	C60109	CEM-V-4B	275	C60282	CEM-DE4	287	C60434	CEM-EMS-5	280	C60509	CEM-AM2	281
C60040	CEM-V-4R	273	C60110	CEM-V-4B	275	C60283	CEM-DE4	287	C60435	CEM-EMS-5	280	C60510	CEM-AM2	281
C60041	CEM-V-4R	273	C60111	CEM-V-4B	275	C60284	CEM-DE4	287	C60436	CEM-EMS-5	280	C60511	CEM-V2-5R	277
C60042	CEM-V-4R	273	C60112	CEM-V-4B	275	C60285	CEM-DE4	287	C60437	CEM-EMS-5	280	C60512	CEM-V2-5R	277
C60043	CEM-V-4R	273	C60113	CEM-V-4B	275	C60286	CEM-DE4	287	C60438	CEM-EMS-5	280	C60513	CEM-V2-5R	277
C60044	CEM-V-4R	273	C60115	CEM-V-4B	275	C60287	CEM-DE4	287	C60439	CEM-EMS-5	280	C60514	CEM-V2-5R	277
C60045	CEM-V-4R	273	C60116	CEM-V-4B	275	C60288	CEM-DE4	287	C60440	CEM-EMS-5	280	C60515	CEM-V2-5R	277
C60046	CEM-V-4R	273	C60117	CEM-V-4B	275	C60305	CEM-DE4B	288	C60441	CEM-EMS-5	280	C60516	CEM-V2-5R	277
C60047	CEM-V-4R	273	C60118	CEM-V-4B	275	C60306	CEM-DE4B	288	C60442	CEM-EMS-5	280	C60525	CEM-V2-5R	276
C60048	CEM-V-4R	273	C60148	CEM-RS	283	C60307	CEM-DE4B	288	C60443	CEM-EMS-5	280	C60526	CEM-V2-5R	276
C60049	CEM-V-4R	273	C60149	CEM-RS	283	C60308	CEM-DE4B	288	C60444	CEM-EMS-5	280	C60527	CEM-V2-5R	276
C60050	CEM-V-4R	273	C60150	CEM-RS	283	C60309	CEM-DE4B	288	C60445	CEM-EMS-5	280	C60528	CEM-V2-5R	276
C60051	CEM-V-4R	273	C60151	CEM-RS	283	C60310	CEM-DE4B	288	C60446	CEM-EMS-5	280	C60529	CEM-V2-5R	276
C60052	CEM-V-4R	273	C60152	CEM-RS	283	C60311	CEM-DE4B	288	C60447	CEM-EMS-5	280	C60530	CEM-V2-5R	276
C60053	CEM-V-4R	273	C60153	CEM-RS	283	C60312	CEM-DE4B	288	C60448	CEM-EMS-5	280	C60531	CEM-V2-5R	276
C60054	CEM-V-4R	273	C60154	CEM-RS	283	C60313	CEM-DE4B	288	C60449	CEM-EMS-5	280	C60532	CEM-V2-5R	276
C60055	CEM-V-4R	273	C60155	CEM-RS	283	C60314	CEM-DE4B	288	C60450	CEM-EMS-5	280	C60533	CEM-V2-5R	276
C60056	CEM-V-4R	273	C60156	CEM-RS	283	C60315	CEM-DE4B	288	C60451	CEM-EMS-5	280	C60534	CEM-V2-5R	276
C60057	CEM-V-4R	273	C60157	CEM-RS	283	C60316	CEM-DE4B	288	C60452	CEM-EMS-5	280	C60535	CEM-V2-5R	276
C60058	CEM-V-4R	273	C60158	CEM-RS	283	C60365	CEM-EMS-3	279	C60453	CEM-EMS-5	280	C60536	CEM-V2-5R	276
C60059	CEM-V-4R	273	C60159	CEM-RS	283	C60366	CEM-EMS-3	279	C60455	CEM-RA	284	C60537	CEM-V2-5R	276
C60060	CEM-V-4R	273	C60169	CEM-DE2	285	C60367	CEM-EMS-3	279	C60456	CEM-RA	284	C60538	CEM-V2-5R	276
C60061	CEM-V-4R	273	C60170	CEM-DE2	285	C60368	CEM-EMS-3	279	C60457	CEM-RA	284	C60539	CEM-V2-5R	276
C60062	CEM-V-4R	273	C60171	CEM-DE2	285	C60369	CEM-EMS-3	279	C60458	CEM-RA	284	C60540	CEM-V2-5R	276
C60063	CEM-V-4R	273	C60172	CEM-DE2	285	C60370	CEM-EMS-3	279	C60459	CEM-RA	284	C60541	CEM-V2-5R	276
C60064	CEM-V-4R	273	C60173	CEM-DE2	285	C60371	CEM-EMS-3	279	C60460	CEM-RA	284	C60542	CEM-V2-5R	276
C60065	CEM-V-4R	273	C60174	CEM-DE2	285	C60372	CEM-EMS-3	279	C60461	CEM-RA	284	C60543	CEM-V2-5R	276
C60066	CEM-V-4R	273	C60175	CEM-DE2	285	C60373	CEM-EMS-3	279	C60462	CEM-RA	284	C60544	CEM-V2-5R	276
C60067	CEM-V-4R	273	C60176	CEM-DE2	285	C60374	CEM-EMS-3	279	C60463	CEM-RA	284	C60545	CEM-V2-5R	276
C60068	CEM-V-4R	273	C60177	CEM-DE2	285	C60375	CEM-EMS-3	279	C60464	CEM-RA	284	C60546	CEM-V2-5R	276
C60069	CEM-V-4R	273	C60178	CEM-DE2	285	C60376	CEM-EMS-3	279	C60465	CEM-RA	284	C60547	CEM-V2-5R	276
C60070	CEM-V-4R	273	C60179	CEM-DE2	285	C60377	CEM-EMS-3	279	C60466	CEM-RA	284	C60548	CEM-V2-5R	276
C60071	CEM-V-4R	274	C60180	CEM-DE2	285	C60378	CEM-EMS-3	279	C60467	CEM-RA	284	C60549	CEM-V2-5R	276
C60072	CEM-V-4R	274	C60181	CEM-DE2	285	C60379	CEM-EMS-3	279	C60468	CEM-RA	284	C60550	CEM-V2-5R	276
C60073	CEM-V-4R	274	C60182	CEM-DE2	285	C60380	CEM-EMS-3	279	C60469	CEM-RA	284	C60551	CEM-V2-5R	276
C60074	CEM-V-4R	274	C60183	CEM-DE2	285	C60381	CEM-EMS-3	279	C60470	CEM-RA	284	C60552	CEM-V2-5R	276
C60075	CEM-V-4R	274	C60184	CEM-DE2	285	C60382	CEM-EMS-3	279	C60477	CEM-AM2	281	C60553	CEM-V2-5R	276
C60076	CEM-V-4R	274	C60185	CEM-DE2	285	C60383	CEM-EMS-3	279	C60478	CEM-AM2	281	C60554	CEM-V2-5R	276
C60077	CEM-V-4R	274	C60186	CEM-DE2	285	C60384	CEM-EMS-3	279	C60479	CEM-AM2	281	C60555	CEM-V2-5R	276
C60078	CEM-V-4R	274	C60205	CEM-DE2B	286	C60385	CEM-EMS-3	279	C60480	CEM-AM2	281	C60556	CEM-V2-5R	276
C60079	CEM-V-4R	274	C60206	CEM-DE2B	286	C60386	CEM-EMS-3	279	C60481	CEM-AM2	281	C60557	CEM-V2-5R	276
C60080	CEM-V-4R	274	C60207	CEM-DE2B	286	C60387	CEM-EMS-3	279	C60482	CEM-AM2	281	C60558	CEM-V2-5R	276
C60081	CEM-V-4R	274	C60208	CEM-DE2B	286	C60388	CEM-EMS-3	279	C60483	CEM-AM2	281	C60559	CEM-V2-5R	276
C60082	CEM-V-4R	274	C60209	CEM-DE2B	286	C60389	CEM-EMS-3	279	C60484	CEM-AM2	281	C60560	CEM-V2-5R	276
C60083	CEM-V-4R	274	C60210	CEM-DE2B	286	C60390	CEM-EMS-3	279	C60485	CEM-AM2	281	C60561	CEM-V2-5R	276
C60084	CEM-V-4R	274	C60211	CEM-DE2B	286	C60391	CEM-EMS-3	279	C60486	CEM-AM2	281	C60562	CEM-V2-5R	276
C60085	CEM-V-4R	274	C60212	CEM-DE2B	286	C60392	CEM-EMS-3	279	C60487	CEM-AM2	281	C60563	CEM-V2-5R	276
C60086	CEM-V-4R	274	C60213	CEM-DE2B	286	C60393	CEM-EMS-3	279	C60488	CEM-AM2	281	C60564	CEM-V2-5R	276
C60087	CEM-V-4R	274	C60214	CEM-DE2B	286	C60394	CEM-EMS-3	279	C60489	CEM-AM2	281	C60565	CEM-V2-5R	276
C60088	CEM-V-4R	274	C60215	CEM-DE2B	286	C60395	CEM-EMS-3	279	C60490	CEM-AM2	281	C60566	CEM-V2-5R	276
C60089	CEM-V-4R	274	C60216	CEM-DE2B	286	C60396	CEM-EMS-3	279	C60491	CEM-AM2	281	C60567	CEM-V2-5R	276
C60090	CEM-V-4R	274	C60228	CEM-CH4D	305	C60417	CEM-EMS-5	280	C60492	CEM-AM2	281	C60568	CEM-V2-5R	276



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C60569	CEM-V2-5R	276	C60638	CEM-AM3	282	C60952	CEM-SE2B	294	C61045	CEM-SE2	292	C61664	CEM-SE3	295
C60570	CEM-V2-5R	277	C60639	CEM-AM3	282	C60953	CEM-SE2B	294	C61046	CEM-SE2	292	C61665	CEM-SE3	295
C60571	CEM-V2-5R	277	C60640	CEM-AM3	282	C60954	CEM-SE2B	294	C61047	CEM-SE2	292	C61666	CEM-SE3	295
C60572	CEM-V2-5R	277	C60641	CEM-AM3	282	C60955	CEM-SE2B	294	C61048	CEM-SE2	292	C61667	CEM-SE3	295
C60573	CEM-V2-5R	277	C60642	CEM-AM3	282	C60956	CEM-SE2B	294	C61049	CEM-SE2	292	C61668	CEM-SE3	295
C60574	CEM-V2-5R	277	C60643	CEM-AM3	282	C60957	CEM-SE2B	294	C61050	CEM-SE2	292	C61669	CEM-SE3	295
C60575	CEM-V2-5R	277	C60644	CEM-AM3	282	C60958	CEM-SE2B	294	C61051	CEM-SE2	292	C61670	CEM-SE3	295
C60576	CEM-V2-5R	277	C60645	CEM-AM3	282	C60959	CEM-SE2B	294	C61052	CEM-SE2	292	C61671	CEM-SE3	295
C60577	CEM-V2-5R	277	C60646	CEM-AM3	282	C60960	CEM-SE2B	294	C61053	CEM-SE2	292	C61672	CEM-SE3	295
C60578	CEM-V2-5R	277	C60647	CEM-AM3	282	C60961	CEM-SE2B	294	C61054	CEM-SE2	292	C61673	CEM-SE3	295
C60579	CEM-V2-5R	277	C60649	CEM-SEST2	303	C60962	CEM-SE2B	294	C61055	CEM-SE2	292	C61674	CEM-SE3	295
C60580	CEM-V2-5R	277	C60650	CEM-SEST2	303	C60963	CEM-SE2B	294	C61056	CEM-SE2	292	C61675	CEM-SE3	295
C60581	CEM-V2-5R	277	C60651	CEM-SEST2	303	C60964	CEM-SE2B	294	C61057	CEM-SE2	292	C61676	CEM-SE3	295
C60582	CEM-V2-5R	277	C60652	CEM-SEST2	303	C60965	CEM-SE2B	294	C61058	CEM-SE2	292	C61677	CEM-SE3	295
C60583	CEM-V2-5R	277	C60653	CEM-SEST2	303	C60966	CEM-SE2B	294	C61059	CEM-SE2	292	C61678	CEM-SE3	295
C60584	CEM-V2-5R	277	C60654	CEM-SEST2	303	C60967	CEM-SE2B	294	C61060	CEM-SE2	292	C61679	CEM-SE3	295
C60585	CEM-V2-5R	277	C60655	CEM-SEST2	303	C60968	CEM-SE2B	294	C61061	CEM-SE2	292	C61680	CEM-SE3	295
C60586	CEM-V2-5R	277	C60732	1002L	152	C60969	CEM-SE2B	294	C61062	CEM-SE2	292	C61681	CEM-SE3	295
C60587	CEM-V2-5R	277	C60748	1002L	152	C60970	CEM-SE2B	294	C61063	CEM-SE2	292	C61682	CEM-SE3	295
C60588	CEM-V2-5R	277	C60752	1002L	152	C60971	CEM-SE2B	294	C61064	CEM-SE2	292	C61683	CEM-SE3	295
C60589	CEM-V2-5R	277	C60760	1002L	152	C60972	CEM-SE2B	294	C61065	CEM-SE2	292	C61684	CEM-SE3	295
C60590	CEM-V2-5R	277	C60764	1002L	152	C60973	CEM-SE2B	294	C61066	CEM-SE2	292	C61685	CEM-SE3	295
C60591	CEM-V2-5R	277	C60776	1002L	152	C60974	CEM-SE2B	294	C61067	CEM-SE2	292	C61686	CEM-SE3	295
C60592	CEM-V2-5R	277	C60780	1002L	152	C60999	1011	155	C61068	CEM-SE2	292	C61687	CEM-SE3	295
C60593	CEM-V2-5R	277	C60796	1002L	152	C61001	CEM-SE2	291	C61069	CEM-SE2	292	C61688	CEM-SE3	295
C60594	CEM-V2-5R	277	C60808	1002L	152	C61002	CEM-SE2	291	C61070	CEM-SE2	292	C61689	CEM-SE3	295
C60595	CEM-V2-5R	277	C60812	1002L	152	C61003	CEM-SE2	291	C61071	CEM-SE2	292	C61690	CEM-SE3	295
C60596	CEM-V2-5R	277	C60831	1002L	152	C61004	CEM-SE2	291	C61072	CEM-SE2	292	C61691	CEM-SE3	295
C60597	CEM-V2-5R	277	C60835	1002L	152	C61005	CEM-SE2	291	C61073	CEM-SE2	292	C61692	CEM-SE3	295
C60598	CEM-V2-5R	277	C60866	1002L	152	C61006	CEM-SE2	291	C61074	CEM-SE2	292	C61693	CEM-SE3	295
C60599	CEM-V2-5R	277	C60914	CEM-SE2B	293	C61007	CEM-SE2	291	C61075	CEM-SE2	292	C61694	CEM-SE3	295
C60600	CEM-V2-5R	277	C60915	CEM-SE2B	293	C61008	CEM-SE2	291	C61076	CEM-SE2	292	C61695	CEM-SE3	295
C60601	CEM-V2-5R	277	C60916	CEM-SE2B	293	C61009	CEM-SE2	291	C61077	CEM-SE2	292	C61696	CEM-SE3	295
C60602	CEM-V2-5R	277	C60917	CEM-SE2B	293	C61010	CEM-SE2	291	C61078	CEM-SE2	292	C61697	CEM-SE3	295
C60603	CEM-V2-5R	277	C60918	CEM-SE2B	293	C61011	CEM-SE2	291	C61079	CEM-SE2	292	C61698	CEM-SE3	295
C60604	CEM-V2-5R	277	C60919	CEM-SE2B	293	C61012	CEM-SE2	291	C61080	CEM-SE2	292	C61699	CEM-SE3	295
C60605	CEM-V2-5R	277	C60920	CEM-SE2B	293	C61013	CEM-SE2	291	C61081	CEM-SE2	292	C61700	CEM-SE3	295
C60606	CEM-V2-5R	277	C60921	CEM-SE2B	293	C61014	CEM-SE2	291	C61082	CEM-SE2	292	C61701	CEM-SE3	295
C60607	CEM-V2-5R	277	C60922	CEM-SE2B	293	C61015	CEM-SE2	291	C61083	CEM-SE2	292	C61805	CEM-SE4	298
C60608	CEM-V2-5R	277	C60923	CEM-SE2B	293	C61016	CEM-SE2	291	C61112	CEM-CH2	304	C61806	CEM-SE4	298
C60609	CEM-V2-5R	277	C60924	CEM-SE2B	293	C61017	CEM-SE2	291	C61113	CEM-CH2	304	C61807	CEM-SE4	298
C60610	CEM-V2-5R	277	C60925	CEM-SE2B	293	C61018	CEM-SE2	291	C61114	CEM-CH2	304	C61808	CEM-SE4	298
C60611	CEM-V2-5R	277	C60926	CEM-SE2B	293	C61019	CEM-SE2	291	C61115	CEM-CH2	304	C61809	CEM-SE4	298
C60612	CEM-V2-5R	277	C60927	CEM-SE2B	293	C61020	CEM-SE2	291	C61116	CEM-CH2	304	C61810	CEM-SE4	298
C60613	CEM-V2-5R	277	C60928	CEM-SE2B	293	C61021	CEM-SE2	291	C61117	CEM-CH2	304	C61811	CEM-SE4	298
C60614	CEM-V2-5R	277	C60929	CEM-SE2B	293	C61022	CEM-SE2	291	C61118	CEM-CH2	304	C61812	CEM-SE4	298
C60616	CEM-AM3	282	C60930	CEM-SE2B	293	C61023	CEM-SE2	291	C61119	CEM-CH2	304	C61813	CEM-SE4	298
C60617	CEM-AM3	282	C60931	CEM-SE2B	293	C61024	CEM-SE2	291	C61120	CEM-CH2	304	C61814	CEM-SE4	298
C60618	CEM-AM3	282	C60932	CEM-SE2B	293	C61025	CEM-SE2	291	C61121	CEM-CH2	304	C61815	CEM-SE4	298
C60619	CEM-AM3	282	C60933	CEM-SE2B	293	C61026	CEM-SE2	291	C61122	CEM-CH2	304	C61816	CEM-SE4	298
C60620	CEM-AM3	282	C60934	CEM-SE2B	293	C61027	CEM-SE2	291	C61123	CEM-CH2	304	C61817	CEM-SE4	298
C60621	CEM-AM3	282	C60935	CEM-SE2B	293	C61028	CEM-SE2	291	C61124	CEM-CH2	304	C61818	CEM-SE4	298
C60622	CEM-AM3	282	C60936	CEM-SE2B	293	C61029	CEM-SE2	291	C61125	CEM-CH2	304	C61819	CEM-SE4	298
C60623	CEM-AM3	282	C60937	CEM-SE2B	293	C61030	CEM-SE2	291	C61126	CEM-CH2	304	C61820	CEM-SE4	298
C60624	CEM-AM3	282	C60938	CEM-SE2B	293	C61031	CEM-SE2	291	C61127	CEM-CH2	304	C61821	CEM-SE4	298
C60625	CEM-AM3	282	C60939	CEM-SE2B	293	C61032	CEM-SE2	291	C61226	CEM-CH2D	304	C61822	CEM-SE4	298
C60626	CEM-AM3	282	C60940	CEM-SE2B	293	C61033	CEM-SE2	291	C61227	CEM-CH2D	304	C61824	CEM-SE4	298
C60627	CEM-AM3	282	C60941	CEM-SE2B	293	C61034	CEM-SE2	291	C61228	CEM-CH2D	304	C61825	CEM-SE4	298
C60628	CEM-AM3	282	C60942	CEM-SE2B	293	C61035	CEM-SE2	291	C61229	CEM-CH2D	304	C61827	CEM-SE4	298
C60629	CEM-AM3	282	C60943	CEM-SE2B	293	C61036	CEM-SE2	292	C61230	CEM-CH2D	304	C61828	CEM-SE4	298
C60630	CEM-AM3	282	C60944	CEM-SE2B	293	C61037	CEM-SE2	292	C61231	CEM-CH2D	304	C61829	CEM-SE4	298
C60631	CEM-AM3	282	C60945	CEM-SE2B	293	C61038	CEM-SE2	292	C61657	CEM-SE3	295	C61830	CEM-SE4	298
C60632	CEM-AM3	282	C60946	CEM-SE2B	293	C61039	CEM-SE2	292	C61658	CEM-SE3	295	C61831	CEM-SE4	298
C60633	CEM-AM3	282	C60947	CEM-SE2B	293	C61040	CEM-SE2	292	C61659	CEM-SE3	295	C61832	CEM-SE4	298
C60634	CEM-AM3	282	C60948	CEM-SE2B	293	C61041	CEM-SE2	292	C61660	CEM-SE3	295	C61833	CEM-SE4	298
C60635	CEM-AM3	282	C60949	CEM-SE2B	293	C61042	CEM-SE2	292	C61661	CEM-SE3	295	C61834	CEM-SE4	298
C60636	CEM-AM3	282	C60950	CEM-SE2B	293	C61043	CEM-SE2	292	C61662	CEM-SE3	295	C61835	CEM-SE4	298
C60637	CEM-AM3	282	C60951	CEM-SE2B	294	C61044	CEM-SE2	292	C61663	CEM-SE3	295	C61836	CEM-SE4	298

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C61837	CEM-SE4	298	C61905	CEM-SE4	300	C63553	CEM-SE4B	302	C65026	610	182	C65374	610	183
C61838	CEM-SE4	298	C61906	CEM-SE4	300	C63554	CEM-SE4B	302	C65027	610	182	C65384	610	183
C61839	CEM-SE4	298	C61907	CEM-SE4	300	C63555	CEM-SE4B	302	C65036	610	182	C65385	610	183
C61840	CEM-SE4	298	C61908	CEM-SE4	300	C63556	CEM-SE4B	302	C65037	610	182	C65395	610	183
C61841	CEM-SE4	298	C61909	CEM-SE4	300	C63557	CEM-SE4B	302	C65045	610	182	C65396	610	183
C61842	CEM-SE4	298	C61910	CEM-SE4	300	C63558	CEM-SE4B	302	C65046	610	182	C65405	610	183
C61843	CEM-SE4	298	C61911	CEM-SE4	300	C63559	CEM-SE4B	302	C65048	610	182	C65406	610	183
C61844	CEM-SE4	298	C61912	CEM-SE4	300	C63560	CEM-SE4B	302	C65049	610	182	C65407	610	183
C61845	CEM-SE4	298	C61913	CEM-SE4	300	C63561	CEM-SE4B	302	C65057	610	182	C65416	610	183
C61846	CEM-SE4	299	C61914	CEM-SE4	300	C63562	CEM-SE4B	302	C65058	610	182	C65417	610	183
C61847	CEM-SE4	299	C61915	CEM-SE4	300	C63563	CEM-SE4B	302	C65061	610	182	C65426	610	183
C61848	CEM-SE4	299	C61916	CEM-SE4	300	C63564	CEM-SE4B	302	C65062	610	182	C65427	610	183
C61849	CEM-SE4	299	C61917	CEM-SE4	300	C63565	CEM-SE4B	302	C65069	610	182	C65433	610	183
C61850	CEM-SE4	299	C61918	CEM-SE4	300	C63566	CEM-SE4B	302	C65070	610	182	C65434	610	183
C61851	CEM-SE4	299	C61919	CEM-SE4	300	C63567	CEM-SE4B	302	C65075	610	182	C65441	610	183
C61852	CEM-SE4	299	C61920	CEM-SE4	300	C63568	CEM-SE4B	302	C65076	610	182	C65442	610	183
C61853	CEM-SE4	299	C61921	CEM-SE4	300	C63569	CEM-SE4B	302	C65083	610	182	C65449	610	183
C61854	CEM-SE4	299	C61922	CEM-SE4	300	C63570	CEM-SE4B	302	C65084	610	182	C65450	610	183
C61855	CEM-SE4	299	C61923	CEM-SE4	300	C63571	CEM-SE4B	302	C65093	610	182	C65470	610	183
C61856	CEM-SE4	299	C61924	CEM-SE4	300	C63572	CEM-SE4B	302	C65114	610	182	C65471	610	183
C61857	CEM-SE4	299	C61925	CEM-SE4	300	C63573	CEM-SE4B	302	C65119	610	182	C65491	620	183
C61858	CEM-SE4	299	C61926	CEM-SE4	300	C63574	CEM-SE4B	302	C65124	610	182	C65492	620	183
C61859	CEM-SE4	299	C61927	CEM-SE4	300	C63575	CEM-SE4B	302	C65125	610	182	C65493	620	183
C61860	CEM-SE4	299	C61928	CEM-SE4	300	C63576	CEM-SE4B	302	C65132	610	182	C65494	620	183
C61861	CEM-SE4	299	C63509	CEM-SE4B	301	C63577	CEM-SE4B	302	C65140	610	182	C65495	620	183
C61862	CEM-SE4	299	C63510	CEM-SE4B	301	C63578	CEM-SE4B	302	C65142	610	182	C65497	620	183
C61863	CEM-SE4	299	C63511	CEM-SE4B	301	C63579	CEM-SE4B	302	C65147	610	182	C65571	660	181
C61864	CEM-SE4	299	C63512	CEM-SE4B	301	C64036	965B	172	C65148	610	182	C65572	660	181
C61865	CEM-SE4	299	C63513	CEM-SE4B	301	C64037	965B	172	C65159	610	182	C65573	660	181
C61866	CEM-SE4	299	C63514	CEM-SE4B	301	C64038	965B	172	C65160	610	182	C65574	660	181
C61867	CEM-SE4	299	C63515	CEM-SE4B	301	C64039	965B	172	C65171	610	182	C65575	660	181
C61868	CEM-SE4	299	C63516	CEM-SE4B	301	C64040	965B	172	C65172	610	182	C65576	660	181
C61869	CEM-SE4	299	C63517	CEM-SE4B	301	C64041	965B	172	C65192	610	182	C65580	0650M	181
C61870	CEM-SE4	299	C63518	CEM-SE4B	301	C64042	965B	172	C65193	610	182	C65581	0650M	181
C61871	CEM-SE4	299	C63519	CEM-SE4B	301	C64043	965B	172	C65197	610	182	C65582	0650M	181
C61872	CEM-SE4	299	C63520	CEM-SE4B	301	C64044	965B	172	C65198	610	182	C65583	0650M	181
C61873	CEM-SE4	299	C63521	CEM-SE4B	301	C64045	965B	172	C65208	610	182	C65584	0650M	181
C61874	CEM-SE4	299	C63522	CEM-SE4B	301	C64046	965B	172	C65209	610	182	C65585	0650M	181
C61875	CEM-SE4	299	C63523	CEM-SE4B	301	C64058	975	172	C65220	610	182	C65586	0650M	181
C61876	CEM-SE4	299	C63524	CEM-SE4B	301	C64059	975	172	C65221	610	182	C65587	0650M	181
C61877	CEM-SE4	299	C63525	CEM-SE4B	301	C64060	975	172	C65232	610	183	C65601	650	180
C61878	CEM-SE4	299	C63526	CEM-SE4B	301	C64061	975	172	C65233	610	183	C65602	650	180
C61879	CEM-SE4	299	C63527	CEM-SE4B	301	C64062	975	172	C65239	610	183	C65603	650	180
C61880	CEM-SE4	299	C63528	CEM-SE4B	301	C64063	975	172	C65240	610	183	C65605	650	180
C61881	CEM-SE4	299	C63529	CEM-SE4B	301	C64064	975	172	C65243	610	183	C65606	650	180
C61882	CEM-SE4	299	C63530	CEM-SE4B	301	C64065	975	172	C65244	610	183	C65607	650	180
C61883	CEM-SE4	299	C63531	CEM-SE4B	301	C64098	964B	173	C65250	610	183	C65608	650	180
C61884	CEM-SE4	299	C63532	CEM-SE4B	301	C64099	964B	173	C65251	610	183	C65609	650	180
C61885	CEM-SE4	299	C63533	CEM-SE4B	301	C64100	964B	173	C65264	610	182	C65610	650	180
C61886	CEM-SE4	300	C63534	CEM-SE4B	301	C64101	964B	173	C65265	610	182	C65611	650	180
C61887	CEM-SE4	300	C63535	CEM-SE4B	301	C64102	964B	173	C65269	610	182	C65612	650	180
C61888	CEM-SE4	300	C63536	CEM-SE4B	301	C64103	964B	173	C65270	610	182	C65613	650	180
C61889	CEM-SE4	300	C63537	CEM-SE4B	301	C64107	966B	173	C65280	610	182	C65614	650	180
C61890	CEM-SE4	300	C63538	CEM-SE4B	301	C64108	966B	173	C65281	610	182	C65615	650	180
C61891	CEM-SE4	300	C63539	CEM-SE4B	301	C64109	966B	173	C65292	610	182	C65616	650	180
C61892	CEM-SE4	300	C63540	CEM-SE4B	301	C64110	966B	173	C65293	610	182	C65617	650	180
C61893	CEM-SE4	300	C63541	CEM-SE4B	302	C64111	966B	173	C65303	610	183	C65618	650	180
C61894	CEM-SE4	300	C63542	CEM-SE4B	302	C64112	966B	173	C65304	610	183	C65619	650	180
C61895	CEM-SE4	300	C63543	CEM-SE4B	302	C64116	963B	174	C65311	610	183	C65620	650	180
C61896	CEM-SE4	300	C63544	CEM-SE4B	302	C64117	963B	174	C65312	610	183	C65621	650	180
C61897	CEM-SE4	300	C63545	CEM-SE4B	302	C64118	963B	174	C65315	610	183	C65622	650	180
C61898	CEM-SE4	300	C63546	CEM-SE4B	302	C64119	963B	174	C65316	610	183	C65623	650	180
C61899	CEM-SE4	300	C63547	CEM-SE4B	302	C64129	967B	174	C65328	610	183	C65624	650	180
C61900	CEM-SE4	300	C63548	CEM-SE4B	302	C64130	967B	174	C65329	610	183	C65625	650	180
C61901	CEM-SE4	300	C63549	CEM-SE4B	302	C64131	967B	174	C65339	610	183	C65627	650	180
C61902	CEM-SE4	300	C63550	CEM-SE4B	302	C64132	967B	174	C65340	610	183	C65628	650	180
C61903	CEM-SE4	300	C63551	CEM-SE4B	302	C64133	967B	174	C65349	610	183	C65629	650	180
C61904	CEM-SE4	300	C63552	CEM-SE4B	302	C65022	610	182	C65350	610	183	C65630	650	180



Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C65631	. 650	180	C66222	. CEM-CH4	305	C66750	. 552	185	C67208	. 243	187	C70037	. 2213	59
C65632	. 650	180	C66223	. CEM-CH4	305	C66751	. 552	185	C67209	. 243	187	C70038	. 2213	59
C65633	. 650	180	C66224	. CEM-CH4	305	C66754	. 553	185	C67210	. 244	187	C70039	. 2213	59
C65724	. 0710M	184	C66225	. CEM-CH4	305	C66755	. 553	185	C67211	. 244	187	C70040	. 2213	59
C65729	. 710	182	C66226	. CEM-CH4	305	C66756	. 553	185	C67212	. 245	187	C70041	. 2213	59
C65730	. 710	182	C66227	. CEM-CH4	305	C66757	. 553	185	C67213	. 245	187	C70042	. 2213	59
C65732	. 0710M	184	C66228	. CEM-CH4	305	C66758	. 553	185	C67214	. 223	186	C70043	. 2213	59
C65733	. 710	182	C66229	. CEM-CH4	305	C66759	. 553	185	C67215	. 223	186	C70044	. 2213	59
C65734	. 710	182	C66670	. 550	186	C66760	. 553	185	C67216	. 223	186	C70045	. 2213	59
C65737	. 0710M	184	C66671	. 550	186	C66761	. 553	185	C67217	. 223	186	C70046	. 2213	59
C65739	. 710	182	C66672	. 550	186	C66762	. 553	185	C67218	. 223	186	C70047	. 2213	59
C65740	. 710	182	C66673	. 550	186	C66763	. 553	185	C67220	. 225	186	C70048	. 2213	59
C65742	. 0710M	184	C66674	. 550	186	C66764	. 553	185	C67221	. 225	186	C70049	. 2213	59
C65743	. 710	182	C66675	. 550	186	C66769	. 553	185, 186	C67223	. 222	184	C70050	. 2213	59
C65744	. 710	182	C66676	. 550	186	C66770	. 553	185, 186	C67224	. 222	184	C70051	. 2213	59
C65747	. 0710M	184	C66677	. 550	186	C66771	. 553	185, 186	C67226	. 222	184	C70052	. 2213	60
C65751	. 710	182	C66678	. 550	186	C66772	. 553	185, 186	C67227	. 222	184	C70053	. 2213	60
C65752	. 710	182	C66679	. 550	186	C66773	. 553	185, 186	C67228	. 222	184	C70054	. 2213	60
C65757	. 0710M	184	C66681	. 552	185	C66774	. 553	185, 186	C67229	. 222	184	C70055	. 2213	60
C65760	. 710	182	C66682	. 552	185	C66782	. 554	185	C67232	. 226	186	C70056	. 2213	60
C65761	. 710	182	C66683	. 552	185	C66783	. 554	185	C67235	. 224	184	C70057	. 2213	56
C65766	. 710	182	C66684	. 552	185	C66784	. 554	185	C67236	. 224	184	C70058	. 2213	56
C65767	. 710	182	C66685	. 552	185	C66785	. 554	185	C67237	. 224	184	C70059	. 2213	56
C65785	. 710	182	C66686	. 552	185	C66786	. 554	185	C67238	. 224	184	C70060	. 2213	56
C65789	. 710	182	C66693	. 550	185	C66787	. 554	185	C67275	. 650	181, 188	C70061	. 2213	56
C65792	. 710	182	C66694	. 550	185	C66788	. 554	185	C67276	. 650	181, 188	C70062	. 2213	56
C65793	. 710	182	C66695	. 550	185	C66789	. 554	185	C67278	. 650	181, 188	C70063	. 2213	57
C65798	. 710	182	C66696	. 550	185	C66790	. 554	185	C67282	. 650	181, 188	C70064	. 2213	57
C65801	. 0710M	184	C66697	. 550	185	C66791	. 554	185	C67283	. 0650M	181, 188	C70065	. 2213	57
C65804	. 710	182	C66698	. 550	185	C66792	. 554	185	C67284	. 650	188	C70067	. 2213	57
C65805	. 710	182	C66699	. 550	185	C66793	. 554	185	C69496	. 620	183	C70068	. 2213	57
C65807	. 0710M	184	C66700	. 550	185	C66794	. 554	185	C70000	. 2213	56	C70070	. 2213	57
C65808	. 710	182	C66701	. 550	185	C66795	. 554	185	C70001	. 2213	56	C70071	. 2213	57
C65809	. 710	182	C66703	. 550	185	C66796	. 554	185	C70002	. 2213	56	C70072	. 2213	57
C65813	. 0710M	184	C66704	. 550	185	C66797	. 554	185	C70003	. 2213	57	C70073	. 2213	57
C65816	. 710	182	C66705	. 550	185	C66798	. 554	185	C70004	. 2213	57	C70074	. 2213	57
C65817	. 710	182	C66706	. 550	185	C66801	. 554	185	C70005	. 2213	57	C70076	. 2213	57
C65824	. 0710M	184	C66707	. 550	185	C66802	. 554	185	C70006	. 2213	57	C70077	. 2213	57
C65828	. 710	182	C66708	. 550	185	C66803	. 554	185	C70007	. 2213	57	C70078	. 2213	57
C65829	. 710	182	C66709	. 550	185	C66804	. 554	185	C70008	. 2213	58	C70079	. 2213	57
C65833	. 0710M	184	C66710	. 550	185	C66805	. 554	185	C70009	. 2213	58	C70080	. 2213	57
C65839	. 710	182	C66711	. 550	185	C66806	. 554	185	C70010	. 2213	58	C70081	. 2213	57
C65840	. 710	182	C66712	. 550	185	C66807	. 554	185	C70011	. 2213	58	C70082	. 2213	57
C65844	. 710	182	C66713	. 550	185	C66808	. 554	185	C70012	. 2213	58	C70083	. 2213	58
C65845	. 710	182	C66714	. 550	185	C66809	. 554	185	C70013	. 2213	58	C70085	. 2213	58
C65855	. 710	182	C66715	. 550	185	C66810	. 554	185	C70014	. 2213	59	C70086	. 2213	58
C65856	. 710	182	C66716	. 550	185	C66811	. 554	185	C70015	. 2213	59	C70087	. 2213	58
C65865	. 710	182	C66717	. 550	185	C66812	. 554	185	C70016	. 2213	59	C70088	. 2213	58
C65866	. 710	182	C66718	. 550	185	C66813	. 554	185	C70017	. 2213	59	C70089	. 2213	58
C65875	. 710	183	C66719	. 550	185	C66820	. 551	186	C70018	. 2213	59	C70090	. 2213	58
C65876	. 710	183	C66720	. 550	185	C66821	. 551	186	C70019	. 2213	59	C70091	. 2213	58
C65880	. 0710M	184	C66721	. 550	185	C66822	. 551	186	C70020	. 2213	59	C70092	. 2213	58
C65881	. 710	183	C66722	. 550	185	C66823	. 551	186	C70021	. 2213	59	C70094	. 2213	58
C65882	. 710	183	C66723	. 550	185	C66824	. 551	186	C70022	. 2213	59	C70095	. 2213	58
C65884	. 710	183	C66727	. 551	185	C66825	. 551	186	C70023	. 2213	60	C70096	. 2213	58
C65885	. 710	183	C66728	. 551	185	C66826	. 551	186	C70024	. 2213	60	C70097	. 2213	58
C65889	. 0710M	184	C66729	. 551	185	C66827	. 551	186	C70025	. 2213	60	C70098	. 2213	58
C65901	. 0710M	184	C66732	. 551	185	C66828	. 551	186	C70026	. 2213	60	C70099	. 2213	58
C65946	. 710	183	C66733	. 551	185	C66829	. 551	186	C70027	. 2213	60	C70100	. 2213	58
C65947	. 710	183	C66737	. 552	185	C67197	. 240	187	C70028	. 2213	60	C70101	. 2213	58
C65957	. 710	183	C66738	. 552	185	C67200	. 240	187	C70029	. 2213	60	C70102	. 2213	58
C65958	. 710	183	C66739	. 552	185	C67201	. 240	187	C70030	. 2213	60	C70104	. 2213	58
C65966	. 710	183	C66740	. 552	185	C67202	. 240	187	C70031	. 2213	60	C70106	. 2213	59
C65967	. 710	183	C66741	. 552	185	C67203	. 240	187	C70032	. 2213	59	C70107	. 2213	59
C66218	. CEM-CH4	305	C66746	. 552	185	C67204	. 240	187	C70033	. 2213	59	C70108	. 2213	59
C66219	. CEM-CH4	305	C66747	. 552	185	C67205	. 240	187	C70034	. 2213	59	C70109	. 2213	59
C66220	. CEM-CH4	305	C66748	. 552	185	C67206	. 242	187	C70035	. 2213	59	C70110	. 2213	59
C66221	. CEM-CH4	305	C66749	. 552	185	C67207	. 242	187	C70036	. 2213	59	C70111	. 2213	59

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C70112	. 2213	59	C70182	. 2213	57	C70279	. 2330	21	C70347	. 2330	19	C70503	. CEM-AM2	281
C70113	. 2213	59	C70183	. 2213	57	C70280	. 2330	20	C70348	. 2330	19	C70504	. CEM-AM2	281
C70114	. 2213	59	C70184	. 2213	57	C70281	. 2330	20	C70349	. 2330	19	C70505	. CEM-AM2	281
C70115	. 2213	59	C70185	. 2213	57	C70282	. 2330	20	C70350	. 2330	19	C70506	. CEM-AM2	281
C70116	. 2213	59	C70186	. 2213	56	C70283	. 2330	20	C70351	. 2330	19	C70507	. CEM-AM2	281
C70117	. 2213	59	C70187	. 2213	56	C70284	. 2330	20	C70352	. 2330	19	C70508	. CEM-AM2	281
C70118	. 2213	59	C70188	. 2213	56	C70285	. 2330	20	C70353	. 2330	19	C70509	. CEM-AM2	281
C70119	. 2213	59	C70189	. 2213	56	C70286	. 2330	20	C70354	. 2330	19	C70510	. CEM-AM2	281
C70120	. 2213	59	C70190	. 2213	56	C70287	. 2330	20	C70355	. 2330	19	C71000	. 2001G	37
C70122	. 2213	59	C70191	. 2213	56	C70288	. 2330	20	C70356	. 2330	19	C71000	. 2001G	118
C70124	. 2213	59	C70192	. 2213	56	C70289	. 2330	20	C70365	. 2213	60	C71003	. 2001G	32
C70125	. 2213	60	C70193	. 2213	56	C70290	. 2330	20	C70365	. 2213	118	C71004	. 2001G	32
C70126	. 2213	60	C70194	. 2213	56	C70291	. 2330	20	C70366	. 2213	60	C71005	. 2001G	33
C70127	. 2213	60	C70195	. 2213	56	C70292	. 2330	20	C70366	. 2213	118	C71006	. 2001G	33
C70128	. 2213	60	C70196	. 2213	56	C70293	. 2330	20	C70367	. 2213	60	C71007	. 2001G	33
C70129	. 2213	60	C70197	. 2213	56	C70294	. 2330	20	C70367	. 2213	118	C71008	. 2001G	33
C70130	. 2213	60	C70198	. 2213	56	C70295	. 2330	20	C70368	. 2330	21	C71009	. 2001G	33
C70131	. 2213	60	C70199	. 2213	56	C70296	. 2330	20	C70368	. 2330	118	C71010	. 2001G	34
C70132	. 2213	60	C70200	. 2213	56	C70297	. 2330	20	C70369	. 2330	21	C71011	. 2001G	34
C70133	. 2213	60	C70201	. 2213	56	C70298	. 2330	21	C70369	. 2330	118	C71012	. 2001G	34
C70134	. 2213	58	C70202	. 2213	56	C70299	. 2330	21	C70370	. 2330	21	C71013	. 2001G	34
C70135	. 2213	58	C70203	. 2213	56	C70300	. 2330	21	C70370	. 2330	118	C71014	. 2001G	34
C70136	. 2213	58	C70204	. 2213	56	C70301	. 2330	21	C70371	. 2222	55	C71015	. 2001G	34
C70137	. 2213	58	C70205	. 2213	56	C70302	. 2330	21	C70374	. CEM-EG2	303	C71016	. 2001G	35
C70138	. 2213	58	C70206	. 2213	56	C70303	. 2330	21	C70375	. CEM-EG2	303	C71017	. 2001G	35
C70139	. 2213	58	C70207	. 2213	56	C70304	. 2330	21	C70376	. CEM-EG2	303	C71018	. 2001G	35
C70140	. 2213	58	C70208	. 2213	56	C70305	. 2330	20	C70455	. CEM-RA	284	C71019	. 2001G	35
C70141	. 2213	58	C70209	. 2213	56	C70306	. 2330	20	C70456	. CEM-RA	284	C71020	. 2001G	35
C70142	. 2213	58	C70210	. 2213	56	C70307	. 2330	20	C70457	. CEM-RA	284	C71021	. 2001G	35
C70143	. 2213	58	C70211	. 2213	56	C70308	. 2330	20	C70458	. CEM-RA	284	C71022	. 2001G	35
C70144	. 2213	58	C70212	. 2213	56	C70309	. 2330	20	C70459	. CEM-RA	284	C71023	. 2001G	35
C70145	. 2213	58	C70213	. 2213	56	C70310	. 2330	20	C70460	. CEM-RA	284	C71024	. 2001G	36
C70146	. 2213	58	C70220	. 2213	57	C70311	. 2330	20	C70461	. CEM-RA	284	C71025	. 2001G	36
C70147	. 2213	58	C70221	. 2213	57	C70312	. 2330	20	C70462	. CEM-RA	284	C71026	. 2001G	36
C70148	. 2213	58	C70222	. 2213	57	C70313	. 2330	20	C70463	. CEM-RA	284	C71027	. 2001G	36
C70149	. 2213	58	C70223	. 2213	58	C70314	. 2330	20	C70464	. CEM-RA	284	C71028	. 2001G	36
C70150	. 2213	58	C70224	. 2213	58	C70315	. 2330	20	C70465	. CEM-RA	284	C71029	. 2001G	36
C70151	. 2213	58	C70225	. 2213	58	C70316	. 2330	20	C70466	. CEM-RA	284	C71030	. 2001G	36
C70152	. 2213	58	C70226	. 2213	58	C70317	. 2330	20	C70467	. CEM-RA	284	C71031	. 2001G	36
C70153	. 2213	58	C70250	. 2330	19	C70318	. 2330	20	C70468	. CEM-RA	284	C71032	. 2001G	36
C70154	. 2213	58	C70251	. 2330	19	C70319	. 2330	20	C70469	. CEM-RA	284	C71033	. 2001G	36
C70155	. 2213	58	C70252	. 2330	19	C70320	. 2330	20	C70470	. CEM-RA	284	C71034	. 2001G	36
C70156	. 2213	58	C70253	. 2330	19	C70321	. 2330	20	C70477	. CEM-AM2	281	C71035	. 2001G	36
C70157	. 2213	58	C70254	. 2330	19	C70322	. 2330	20	C70478	. CEM-AM2	281	C71036	. 2001G	36
C70158	. 2213	58	C70255	. 2330	19	C70323	. 2330	20	C70479	. CEM-AM2	281	C71037	. 2001G	36
C70159	. 2213	58	C70256	. 2330	19	C70324	. 2330	20	C70480	. CEM-AM2	281	C71038	. 2001G	36
C70160	. 2213	58	C70257	. 2330	20	C70325	. 2330	20	C70481	. CEM-AM2	281	C71039	. 2001G	36
C70161	. 2213	58	C70258	. 2330	20	C70326	. 2330	20	C70482	. CEM-AM2	281	C71040	. 2001G	36
C70162	. 2213	57	C70259	. 2330	20	C70327	. 2330	20	C70483	. CEM-AM2	281	C71041	. 2001G	36
C70163	. 2213	57	C70260	. 2330	20	C70328	. 2330	20	C70484	. CEM-AM2	281	C71042	. 2001G	36
C70164	. 2213	57	C70261	. 2330	20	C70329	. 2330	20	C70485	. CEM-AM2	281	C71043	. 2001G	36
C70165	. 2213	57	C70262	. 2330	20	C70330	. 2330	20	C70486	. CEM-AM2	281	C71044	. 2001G	36
C70166	. 2213	57	C70263	. 2330	20	C70331	. 2330	20	C70487	. CEM-AM2	281	C71071	. 2001G	34
C70167	. 2213	57	C70264	. 2330	20	C70332	. 2330	19	C70488	. CEM-AM2	281	C71072	. 2001G	34
C70168	. 2213	57	C70265	. 2330	20	C70333	. 2330	19	C70489	. CEM-AM2	281	C71073	. 2001G	34
C70169	. 2213	57	C70266	. 2330	20	C70334	. 2330	19	C70490	. CEM-AM2	281	C71074	. 2001G	35
C70170	. 2213	57	C70267	. 2330	20	C70335	. 2330	19	C70491	. CEM-AM2	281	C71076	. 2001G	35
C70171	. 2213	57	C70268	. 2330	20	C70336	. 2330	19	C70492	. CEM-AM2	281	C71077	. 2001G	35
C70172	. 2213	57	C70269	. 2330	20	C70337	. 2330	19	C70493	. CEM-AM2	281	C71078	. 2001G	35
C70173	. 2213	57	C70270	. 2330	21	C70338	. 2330	19	C70494	. CEM-AM2	281	C71079	. 2001G	35
C70174	. 2213	57	C70271	. 2330	21	C70339	. 2330	19	C70495	. CEM-AM2	281	C71080	. 2001G	35
C70175	. 2213	57	C70272	. 2330	21	C70340	. 2330	19	C70496	. CEM-AM2	281	C71081	. 2001G	35
C70176	. 2213	57	C70273	. 2330	21	C70341	. 2330	19	C70497	. CEM-AM2	281	C71082	. 2001G	35
C70177	. 2213	57	C70274	. 2330	21	C70342	. 2330	19	C70498	. CEM-AM2	281	C71083	. 2001G	35
C70178	. 2213	57	C70275	. 2330	21	C70343	. 2330	19	C70499	. CEM-AM2	281	C71084	. 2001G	35
C70179	. 2213	57	C70276	. 2330	21	C70344	. 2330	19	C70500	. CEM-AM2	281	C71085	. 2001G	35
C70180	. 2213	57	C70277	. 2330	21	C70345	. 2330	19	C70501	. CEM-AM2	281	C71086	. 2001G	35
C70181	. 2213	57	C70278	. 2330	21	C70346	. 2330	19	C70502	. CEM-AM2	281	C71087	. 2001G	35

Index by Part Number

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C72246	2002G	34	C72333	2002G	36	C73111	2002G-TC	34	C73280	2002G-TC	35	C73451	2228	52
C72247	2002G	34	C72335	2002G	36	C73112	2002G-TC	34	C73285	2002G-TC	35	C73452	2228	52
C72248	2002G	34	C72337	2002G	36	C73113	2002G-TC	34	C73290	2002G-TC	35	C73453	2228	52
C72249	2002G	34	C73003	2002G-TC	32	C73114	2002G-TC	34	C73295	2002G-TC	35	C73454	2228	51
C72250	2002G	34	C73004	2002G-TC	32	C73115	2002G-TC	34	C73300	2002G-TC	36	C73455	2228	51
C72251	2002G	34	C73005	2002G-TC	33	C73116	2002G-TC	34	C73305	2002G-TC	36	C73456	2228	51
C72252	2002G	34	C73006	2002G-TC	33	C73117	2002G-TC	34	C73306	2002G-TC	36	C73457	2228	51
C72253	2002G	34	C73007	2002G-TC	33	C73118	2002G-TC	34	C73308	2002G-TC	36	C73458	2228	51
C72254	2002G	34	C73008	2002G-TC	33	C73119	2002G-TC	34	C73310	2002G-TC	36	C73459	2228	51
C72255	2002G	34	C73009	2002G-TC	33	C73120	2002G-TC	34	C73312	2002G-TC	36	C73460	2228	51
C72256	2002G	34	C73010	2002G-TC	34	C73121	2002G-TC	34	C73314	2002G-TC	36	C73461	2228	51
C72257	2002G	34	C73011	2002G-TC	34	C73122	2002G-TC	34	C73316	2002G-TC	36	C73462	2228	51
C72259	2002G	34	C73012	2002G-TC	34	C73123	2002G-TC	34	C73319	2002G-TC	36	C73463	2228	51
C72260	2002G	34	C73013	2002G-TC	34	C73124	2002G-TC	34	C73323	2002G-TC	36	C73464	2228	51
C72261	2002G	34	C73014	2002G-TC	34	C73125	2002G-TC	34	C73327	2002G-TC	36	C73465	2228	51
C72262	2002G	34	C73015	2002G-TC	34	C73126	2002G-TC	33	C73331	2002G-TC	36	C73466	2228	51
C72264	2002G	34	C73016	2002G-TC	35	C73127	2002G-TC	33	C73335	2002G-TC	36	C73467	2228	51
C72265	2002G	34	C73017	2002G-TC	35	C73128	2002G-TC	33	C73400	2228	51	C73468	2228	51
C72266	2002G	34	C73018	2002G-TC	35	C73129	2002G-TC	33	C73401	2228	51	C73469	2228	51
C72267	2002G	34	C73019	2002G-TC	35	C73130	2002G-TC	33	C73402	2228	51	C73470	2228	51
C72268	2002G	35	C73020	2002G-TC	35	C73131	2002G-TC	33	C73403	2228	51	C73471	2228	51
C72269	2002G	35	C73021	2002G-TC	35	C73132	2002G-TC	33	C73404	2228	51	C73472	2228	51
C72270	2002G	35	C73022	2002G-TC	35	C73133	2002G-TC	33	C73405	2228	51	C73473	2228	51
C72271	2002G	35	C73023	2002G-TC	35	C73134	2002G-TC	33	C73406	2228	52	C73474	2228	51
C72272	2002G	35	C73024	2002G-TC	36	C73135	2002G-TC	33	C73407	2228	52	C73475	2228	51
C72273	2002G	35	C73025	2002G-TC	36	C73136	2002G-TC	33	C73408	2228	52	C73476	2228	51
C72274	2002G	35	C73026	2002G-TC	36	C73137	2002G-TC	33	C73409	2228	52	C73477	2228	51
C72275	2002G	35	C73027	2002G-TC	36	C73138	2002G-TC	33	C73410	2228	52	C73478	2228	51
C72276	2002G	35	C73028	2002G-TC	36	C73139	2002G-TC	33	C73411	2228	52	C73479	2228	51
C72277	2002G	35	C73029	2002G-TC	36	C73140	2002G-TC	33	C73412	2228	52	C73480	2228	51
C72278	2002G	35	C73030	2002G-TC	36	C73141	2002G-TC	33	C73413	2228	52	C73460	2331G	22
C72279	2002G	35	C73031	2002G-TC	36	C73142	2002G-TC	33	C73414	2228	52	C74361	2331G	22
C72280	2002G	35	C73032	2002G-TC	36	C73143	2002G-TC	33	C73415	2228	52	C74362	2331G	22
C72282	2002G	35	C73071	2002G-TC	34	C73144	2002G-TC	33	C73416	2228	52	C74363	2331G	22
C72283	2001G	35	C73072	2002G-TC	34	C73145	2002G-TC	33	C73417	2228	52	C74364	2331G	23
C72284	2002G	35	C73073	2002G-TC	34	C73146	2002G-TC	33	C73418	2228	52	C74365	2331G	23
C72285	2002G	35	C73074	2002G-TC	35	C73147	2002G-TC	33	C73419	2228	52	C74366	2331G	23
C72286	2002G	35	C73075	2002G-TC	35	C73148	2002G-TC	32	C73420	2228	52	C74367	2331G	23
C72287	2002G	35	C73076	2002G-TC	35	C73149	2002G-TC	32	C73421	2228	52	C74368	2331G	23
C72289	2002G	35	C73077	2002G-TC	35	C73150	2002G-TC	32	C73422	2228	52	C74369	2331G	23
C72290	2002G	35	C73078	2002G-TC	35	C73151	2002G-TC	32	C73423	2228	52	C74370	2331G	24
C72292	2002G	35	C73079	2002G-TC	35	C73152	2002G-TC	32	C73424	2228	52	C74371	2331G	24
C72293	2002G	35	C73080	2002G-TC	35	C73200	2002G-TC	32	C73425	2228	52	C74372	2331G	24
C72295	2002G	35	C73081	2002G-TC	35	C73210	2002G-TC	32	C73426	2228	52	C74373	2331G	24
C72297	2002G	35	C73082	2002G-TC	35	C73212	2002G-TC	32	C73427	2228	52	C74374	2331G	24
C72298	2002G	36	C73083	2002G-TC	35	C73220	2002G-TC	33	C73428	2228	52	C74375	2331G	24
C72299	2002G	36	C73084	2002G-TC	35	C73228	2002G-TC	33	C73429	2228	52	C74376	2331G	24
C72300	2002G	36	C73085	2002G-TC	35	C73230	2002G-TC	33	C73430	2228	52	C74377	2331G	24
C72301	2002G	36	C73086	2002G-TC	35	C73235	2002G-TC	33	C73431	2228	52	C74378	2331G	24
C72302	2002G	36	C73087	2002G-TC	35	C73237	2002G-TC	33	C73432	2228	52	C74379	2331G	24
C72303	2002G	36	C73088	2002G-TC	35	C73238	2002G-TC	33	C73433	2228	52	C74380	2331G	24
C72305	2002G	36	C73089	2002G-TC	35	C73240	2002G-TC	33	C73434	2228	52	C74381	2331G	24
C72306	2002G	36	C73090	2002G-TC	36	C73241	2002G-TC	33	C73435	2228	52	C74382	2331G	24
C72308	2002G	36	C73091	2002G-TC	36	C73245	2002G-TC	34	C73436	2228	52	C74383	2331G	24
C72309	2002G	36	C73092	2002G-TC	36	C73246	2002G-TC	34	C73437	2228	52	C74384	2331G	24
C72310	2002G	36	C73093	2002G-TC	36	C73247	2002G-TC	34	C73438	2228	52	C74385	2331G	24
C72311	2002G	36	C73094	2002G-TC	36	C73248	2002G-TC	34	C73439	2228	52	C74386	2331G	24
C72312	2002G	36	C73095	2002G-TC	36	C73250	2002G-TC	34	C73440	2228	52	C74387	2331G	24
C72314	2002G	36	C73101	2002G-TC	34	C73253	2002G-TC	34	C73441	2228	52	C74388	2331G	24
C72315	2002G	36	C73102	2002G-TC	34	C73254	2002G-TC	34	C73442	2228	52	C74450	2331G	24
C72316	2002G	36	C73103	2002G-TC	34	C73255	2002G-TC	34	C73443	2228	52	C74451	2331G	24
C72319	2002G	36	C73104	2002G-TC	34	C73256	2002G-TC	34	C73444	2228	52	C74452	2331G	24
C72321	2002G	36	C73105	2002G-TC	34	C73257	2002G-TC	34	C73445	2228	52	C74453	2331G	24
C72323	2002G	36	C73106	2002G-TC	34	C73260	2002G-TC	34	C73446	2228	52	C74454	2331G	23
C72325	2002G	36	C73107	2002G-TC	34	C73265	2002G-TC	34	C73447	2228	52	C74455	2331G	23
C72327	2002G	36	C73108	2002G-TC	34	C73270	2002G-TC	35	C73448	2228	52	C74456	2331G	23
C72329	2002G	36	C73109	2002G-TC	34	C73273	2002G-TC	35	C73449	2228	52	C74457	2331G	23
C72331	2002G	36	C73110	2002G-TC	34	C73275	2002G-TC	35	C73450	2228	52	C74458	2331G	23

Index by Part Number

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C75281	HG-2	229	C75357	RG8-TC	257	C76034	CMCE-2	290	C76102	CMCE-4	297	C76267	CMCE-4AL	297
C75282	HG-2	229	C75358	RG8-TC	257	C76035	CMCE-2	290	C76200	CMCE-2AL	289	C76268	CMCE-4AL	297
C75283	HG-2	229	C75359	RG8-TC	257	C76036	CMCE-2	290	C76201	CMCE-2AL	289	C76269	CMCE-4AL	297
C75284	HG-2	229	C75360	RG8-TC	258	C76037	CMCE-2	290	C76202	CMCE-2AL	289	C77600	.492	180
C75285	HG-2M	230	C75361	RG8-TC	258	C76038	CMCE-2	290	C76203	CMCE-2AL	289	C77602	.492	180
C75286	HG-2M	230	C75362	RG8-TC	258	C76039	CMCE-2	290	C76204	CMCE-2AL	289	C77604	.492	180
C75287	HG-2M	230	C75363	HG-2KS	233	C76040	CMCE-2	290	C76205	CMCE-2AL	289	C77606	.492	180
C75288	HG-2M	230	C75364	HG-2KS	233	C76041	CMCE-2	290	C76206	CMCE-2AL	289	C77608	.492	180
C75289	HG-2M	230	C75365	HG-2KS	233	C76042	CMCE-2	290	C76207	CMCE-2AL	289	C77610	.492	180
C75290	HG-2M	230	C75366	HG-2KS	233	C76043	CMCE-2	290	C76208	CMCE-2AL	289	C77612	.492	180
C75291	HG-2M	230	C75367	HG-2KS	233	C76044	CMCE-2	290	C76209	CMCE-2AL	289	C77614	.492	180
C75292	HG-2M	230	C75368	HG-2KS	233	C76045	CMCE-2	290	C76210	CMCE-2AL	289	C77616	.492	180
C75293	HG-2M	230	C75369	HG-2KS	233	C76046	CMCE-2	290	C76211	CMCE-2AL	289	C77618	.492	180
C75294	HG-2M	230	C75370	HG-2KS	233	C76047	CMCE-2	290	C76212	CMCE-2AL	289	C77620	.492	180
C75295	HG-2M	230	C75371	HG-2KS	233	C76048	CMCE-2	290	C76213	CMCE-2AL	290	C77622	.492	180
C75296	HG-2M	230	C75372	HG-2KS	233	C76049	CMCE-2	290	C76214	CMCE-2AL	290	C77624	.492	180
C75297	HG-2M	230	C75373	CRE	245	C76050	CMCE-2	290	C76215	CMCE-2AL	290	C77626	.492	180
C75298	HG-2M	230	C75374	CRE	245	C76051	CMCE-2	290	C76216	CMCE-2AL	290	C77628	.492	180
C75299	HG-2M	230	C75375	CRE	245	C76052	CMCE-2	290	C76217	CMCE-2AL	290	C77630	.492	180
C75300	HG-2M	230	C75376	CRE	245	C76053	CMCE-2	290	C76218	CMCE-2AL	290	C77632	.492	180
C75301	HG-2M	230	C75377	CRE	245	C76054	CMCE-2	290	C76219	CMCE-2AL	290	C77634	.492	180
C75302	HG-2M	230	C75378	CRE	245	C76055	CMCE-2	290	C76220	CMCE-2AL	290	C77636	.492	180
C75303	HG-2M	230	C75379	CRE	245	C76056	CMCE-2	290	C76221	CMCE-2AL	290	C77638	.492	180
C75304	HG-2M	230	C75380	CRE	245	C76057	CMCE-4	296	C76222	CMCE-2AL	290	C77640	.492	180
C75305	HG-2B	231	C75381	CRE	245	C76058	CMCE-4	296	C76223	CMCE-2AL	290	C77642	.492	180
C75306	HG-2B	231	C75382	CRE	245	C76059	CMCE-4	296	C76224	CMCE-2AL	290	C77644	.492	180
C75307	HG-2B	231	C75383	CRE	245	C76060	CMCE-4	296	C76225	CMCE-2AL	290	C77646	.492	180
C75308	HG-2B	231	C75384	CRE	245	C76061	CMCE-4	296	C76226	CMCE-2AL	290	C77648	.492	180
C75309	HG-2B	231	C75385	CRE	245	C76062	CMCE-4	296	C76227	CMCE-2AL	290	C77650	.492	180
C75310	HG-2B	231	C75386	CRE	245	C76063	CMCE-4	296	C76228	CMCE-2AL	290	C80001	CEM-V-4R	272
C75311	HG-2B	231	C75387	RG8-TC	258	C76064	CMCE-4	296	C76229	CMCE-2AL	290	C80002	CEM-V-4R	272
C75312	HG-2B	231	C75388	RG8-TC	258	C76065	CMCE-4	296	C76230	CMCE-2AL	290	C80003	CEM-V-4R	272
C75313	HG-2B	231	C75389	RG8	258	C76066	CMCE-4	296	C76231	CMCE-2AL	290	C80004	CEM-V-4R	272
C75314	HG-2B	231	C75390	RG8	258	C76067	CMCE-4	296	C76232	CMCE-2AL	290	C80005	CEM-V-4R	272
C75315	HG-2B	231	C75391	RG8	258	C76068	CMCE-4	296	C76233	CMCE-2AL	290	C80006	CEM-V-4R	272
C75316	HG-2B	231	C76001	CMCE-2	289	C76069	CMCE-4	296	C76234	CMCE-2AL	290	C80007	CEM-V-4R	272
C75317	HG-2B	231	C76002	CMCE-2	289	C76070	CMCE-4	296	C76235	CMCE-4AL	296	C80008	CEM-V-4R	272
C75318	HG-2B	231	C76003	CMCE-2	289	C76071	CMCE-4	296	C76236	CMCE-4AL	296	C80009	CEM-V-4R	272
C75319	HG-2B	231	C76004	CMCE-2	289	C76072	CMCE-4	296	C76237	CMCE-4AL	296	C80010	CEM-V-4R	272
C75320	HG-2B	231	C76005	CMCE-2	289	C76073	CMCE-4	296	C76238	CMCE-4AL	296	C80011	CEM-V-4R	272
C75321	HG-2B	231	C76006	CMCE-2	289	C76074	CMCE-4	296	C76239	CMCE-4AL	296	C80012	CEM-V-4R	272
C75322	HG-2B	231	C76007	CMCE-2	289	C76075	CMCE-4	296	C76240	CMCE-4AL	296	C80013	CEM-V-4R	272
C75323	HMD-2B	217	C76008	CMCE-2	289	C76076	CMCE-4	296	C76241	CMCE-4AL	296	C80014	CEM-V-4R	272
C75324	HMD-2B	217	C76009	CMCE-2	289	C76077	CMCE-4	296	C76242	CMCE-4AL	296	C80015	CEM-V-4R	272
C75327	HMD-2B	217	C76010	CMCE-2	289	C76078	CMCE-4	296	C76243	CMCE-4AL	296	C80016	CEM-V-4R	272
C75328	HMD-4	218	C76011	CMCE-2	289	C76079	CMCE-4	296	C76244	CMCE-4AL	296	C80017	CEM-V-4R	272
C75335	HMG-2B	220	C76012	CMCE-2	289	C76080	CMCE-4	296	C76245	CMCE-4AL	296	C80018	CEM-V-4R	272
C75336	HMG-2B	220	C76013	CMCE-2	289	C76081	CMCE-4	296	C76246	CMCE-4AL	296	C80019	CEM-V-4R	272
C75337	HMG-2B	220	C76014	CMCE-2	289	C76082	CMCE-4	296	C76247	CMCE-4AL	296	C80020	CEM-V-4R	272
C75338	HMG-2B	220	C76015	CMCE-2	289	C76083	CMCE-4	296	C76248	CMCE-4AL	296	C80021	CEM-V-4R	272
C75339	HMG-2B	220	C76016	CMCE-2	289	C76084	CMCE-4	296	C76249	CMCE-4AL	296	C80022	CEM-V-4R	272
C75340	HMG-2B	220	C76017	CMCE-2	289	C76085	CMCE-4	296	C76250	CMCE-4AL	296	C80023	CEM-V-4R	272
C75341	HMG-2B	220	C76018	CMCE-2	289	C76086	CMCE-4	296	C76251	CMCE-4AL	296	C80024	CEM-V-4R	272
C75342	HMG-2B	220	C76019	CMCE-2	289	C76087	CMCE-4	296	C76252	CMCE-4AL	296	C80025	CEM-V-4R	272
C75343	HMG-2B	220	C76020	CMCE-2	289	C76088	CMCE-4	296	C76253	CMCE-4AL	296	C80026	CEM-V-4R	272
C75344	RG8	257	C76021	CMCE-2	289	C76089	CMCE-4	296	C76254	CMCE-4AL	296	C80027	CEM-V-4R	272
C75345	RG8	257	C76022	CMCE-2	289	C76090	CMCE-4	297	C76255	CMCE-4AL	296	C80028	CEM-V-4R	272
C75346	RG8	257	C76023	CMCE-2	289	C76091	CMCE-4	297	C76256	CMCE-4AL	296	C80029	CEM-V-4R	272
C75347	RG8	257	C76024	CMCE-2	289	C76092	CMCE-4	297	C76257	CMCE-4AL	296	C80030	CEM-V-4R	272
C75348	RG8	257	C76025	CMCE-2	289	C76093	CMCE-4	297	C76258	CMCE-4AL	297	C80031	CEM-V-4R	272
C75349	RG8	257	C76026	CMCE-2	289	C76094	CMCE-4	297	C76259	CMCE-4AL	297	C80032	CEM-V-4R	272
C75350	RG8	258	C76027	CMCE-2	289	C76095	CMCE-4	297	C76260	CMCE-4AL	297	C80033	CEM-V-4R	272
C75351	RG8	258	C76028	CMCE-2	289	C76096	CMCE-4	297	C76261	CMCE-4AL	297	C80034	CEM-V-4R	272
C75352	RG8	258	C76029	CMCE-2	289	C76097	CMCE-4	297	C76262	CMCE-4AL	297	C80035	CEM-V-4R	273
C75353	RG8	258	C76030	CMCE-2	289	C76098	CMCE-4	297	C76263	CMCE-4AL	297	C80036	CEM-V-4R	273
C75354	RG8	258	C76031	CMCE-2	289	C76099	CMCE-4	297	C76264	CMCE-4AL	297	C80037	CEM-V-4R	273
C75355	RG8	258	C76032	CMCE-2	289	C76100	CMCE-4	297	C76265	CMCE-4AL	297	C80038	CEM-V-4R	273
C75356	RG8	258	C76033	CMCE-2	289	C76101	CMCE-4	297	C76266	CMCE-4AL	297	C80039	CEM-V-4R	273



Index by Part Number

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C80932	CEM-SE2B	293	C81026	CEM-SE2	291	C81667	CEM-SE3	295	C81840	CEM-SE4	298	C81908	CEM-SE4	300
C80933	CEM-SE2B	293	C81027	CEM-SE2	291	C81668	CEM-SE3	295	C81841	CEM-SE4	298	C81909	CEM-SE4	300
C80934	CEM-SE2B	293	C81028	CEM-SE2	291	C81669	CEM-SE3	295	C81842	CEM-SE4	298	C81910	CEM-SE4	300
C80935	CEM-SE2B	293	C81029	CEM-SE2	291	C81670	CEM-SE3	295	C81843	CEM-SE4	298	C81911	CEM-SE4	300
C80936	CEM-SE2B	293	C81030	CEM-SE2	291	C81671	CEM-SE3	295	C81844	CEM-SE4	298	C81912	CEM-SE4	300
C80937	CEM-SE2B	293	C81031	CEM-SE2	291	C81672	CEM-SE3	295	C81845	CEM-SE4	298	C81913	CEM-SE4	300
C80938	CEM-SE2B	293	C81032	CEM-SE2	291	C81673	CEM-SE3	295	C81846	CEM-SE4	299	C81914	CEM-SE4	300
C80939	CEM-SE2B	293	C81033	CEM-SE2	291	C81674	CEM-SE3	295	C81847	CEM-SE4	299	C81915	CEM-SE4	300
C80940	CEM-SE2B	293	C81034	CEM-SE2	291	C81675	CEM-SE3	295	C81848	CEM-SE4	299	C81916	CEM-SE4	300
C80941	CEM-SE2B	293	C81035	CEM-SE2	291	C81676	CEM-SE3	295	C81849	CEM-SE4	299	C81917	CEM-SE4	300
C80942	CEM-SE2B	293	C81036	CEM-SE2	292	C81677	CEM-SE3	295	C81850	CEM-SE4	299	C81918	CEM-SE4	300
C80943	CEM-SE2B	293	C81037	CEM-SE2	292	C81678	CEM-SE3	295	C81851	CEM-SE4	299	C81919	CEM-SE4	300
C80944	CEM-SE2B	293	C81038	CEM-SE2	292	C81679	CEM-SE3	295	C81852	CEM-SE4	299	C81920	CEM-SE4	300
C80945	CEM-SE2B	293	C81039	CEM-SE2	292	C81680	CEM-SE3	295	C81853	CEM-SE4	299	C81921	CEM-SE4	300
C80946	CEM-SE2B	293	C81040	CEM-SE2	292	C81681	CEM-SE3	295	C81854	CEM-SE4	299	C81922	CEM-SE4	300
C80947	CEM-SE2B	293	C81041	CEM-SE2	292	C81682	CEM-SE3	295	C81855	CEM-SE4	299	C81923	CEM-SE4	300
C80948	CEM-SE2B	293	C81042	CEM-SE2	292	C81683	CEM-SE3	295	C81856	CEM-SE4	299	C81924	CEM-SE4	300
C80949	CEM-SE2B	293	C81043	CEM-SE2	292	C81684	CEM-SE3	295	C81857	CEM-SE4	299	C81925	CEM-SE4	300
C80950	CEM-SE2B	293	C81044	CEM-SE2	292	C81685	CEM-SE3	295	C81858	CEM-SE4	299	C81926	CEM-SE4	300
C80951	CEM-SE2B	294	C81045	CEM-SE2	292	C81686	CEM-SE3	295	C81859	CEM-SE4	299	C81927	CEM-SE4	300
C80952	CEM-SE2B	294	C81046	CEM-SE2	292	C81687	CEM-SE3	295	C81860	CEM-SE4	299	C81928	CEM-SE4	300
C80953	CEM-SE2B	294	C81047	CEM-SE2	292	C81688	CEM-SE3	295	C81861	CEM-SE4	299	C83509	CEM-SE4B	301
C80954	CEM-SE2B	294	C81048	CEM-SE2	292	C81689	CEM-SE3	295	C81862	CEM-SE4	299	C83510	CEM-SE4B	301
C80955	CEM-SE2B	294	C81049	CEM-SE2	292	C81690	CEM-SE3	295	C81863	CEM-SE4	299	C83511	CEM-SE4B	301
C80956	CEM-SE2B	294	C81050	CEM-SE2	292	C81691	CEM-SE3	295	C81864	CEM-SE4	299	C83512	CEM-SE4B	301
C80957	CEM-SE2B	294	C81051	CEM-SE2	292	C81692	CEM-SE3	295	C81865	CEM-SE4	299	C83513	CEM-SE4B	301
C80958	CEM-SE2B	294	C81052	CEM-SE2	292	C81693	CEM-SE3	295	C81866	CEM-SE4	299	C83514	CEM-SE4B	301
C80959	CEM-SE2B	294	C81053	CEM-SE2	292	C81694	CEM-SE3	295	C81867	CEM-SE4	299	C83515	CEM-SE4B	301
C80960	CEM-SE2B	294	C81054	CEM-SE2	292	C81695	CEM-SE3	295	C81868	CEM-SE4	299	C83516	CEM-SE4B	301
C80961	CEM-SE2B	294	C81055	CEM-SE2	292	C81696	CEM-SE3	295	C81869	CEM-SE4	299	C83517	CEM-SE4B	301
C80962	CEM-SE2B	294	C81056	CEM-SE2	292	C81697	CEM-SE3	295	C81870	CEM-SE4	299	C83518	CEM-SE4B	301
C80963	CEM-SE2B	294	C81057	CEM-SE2	292	C81698	CEM-SE3	295	C81871	CEM-SE4	299	C83519	CEM-SE4B	301
C80964	CEM-SE2B	294	C81058	CEM-SE2	292	C81699	CEM-SE3	295	C81872	CEM-SE4	299	C83520	CEM-SE4B	301
C80965	CEM-SE2B	294	C81059	CEM-SE2	292	C81700	CEM-SE3	295	C81873	CEM-SE4	299	C83521	CEM-SE4B	301
C80966	CEM-SE2B	294	C81060	CEM-SE2	292	C81701	CEM-SE3	295	C81874	CEM-SE4	299	C83522	CEM-SE4B	301
C80967	CEM-SE2B	294	C81061	CEM-SE2	292	C81805	CEM-SE4	298	C81875	CEM-SE4	299	C83523	CEM-SE4B	301
C80968	CEM-SE2B	294	C81062	CEM-SE2	292	C81806	CEM-SE4	298	C81876	CEM-SE4	299	C83524	CEM-SE4B	301
C80969	CEM-SE2B	294	C81063	CEM-SE2	292	C81807	CEM-SE4	298	C81877	CEM-SE4	299	C83525	CEM-SE4B	301
C80970	CEM-SE2B	294	C81064	CEM-SE2	292	C81808	CEM-SE4	298	C81878	CEM-SE4	299	C83526	CEM-SE4B	301
C80971	CEM-SE2B	294	C81065	CEM-SE2	292	C81809	CEM-SE4	298	C81879	CEM-SE4	299	C83527	CEM-SE4B	301
C80972	CEM-SE2B	294	C81066	CEM-SE2	292	C81810	CEM-SE4	298	C81880	CEM-SE4	299	C83528	CEM-SE4B	301
C80973	CEM-SE2B	294	C81067	CEM-SE2	292	C81811	CEM-SE4	298	C81881	CEM-SE4	299	C83529	CEM-SE4B	301
C80974	CEM-SE2B	294	C81068	CEM-SE2	292	C81812	CEM-SE4	298	C81882	CEM-SE4	299	C83530	CEM-SE4B	301
C81001	CEM-SE2	291	C81069	CEM-SE2	292	C81813	CEM-SE4	298	C81883	CEM-SE4	299	C83531	CEM-SE4B	301
C81002	CEM-SE2	291	C81070	CEM-SE2	292	C81814	CEM-SE4	298	C81884	CEM-SE4	299	C83532	CEM-SE4B	301
C81003	CEM-SE2	291	C81071	CEM-SE2	292	C81815	CEM-SE4	298	C81885	CEM-SE4	299	C83533	CEM-SE4B	301
C81004	CEM-SE2	291	C81072	CEM-SE2	292	C81816	CEM-SE4	298	C81886	CEM-SE4	300	C83534	CEM-SE4B	301
C81005	CEM-SE2	291	C81073	CEM-SE2	292	C81817	CEM-SE4	298	C81887	CEM-SE4	300	C83535	CEM-SE4B	301
C81006	CEM-SE2	291	C81074	CEM-SE2	292	C81818	CEM-SE4	298	C81888	CEM-SE4	300	C83536	CEM-SE4B	301
C81007	CEM-SE2	291	C81075	CEM-SE2	292	C81819	CEM-SE4	298	C81889	CEM-SE4	300	C83537	CEM-SE4B	301
C81008	CEM-SE2	291	C81076	CEM-SE2	292	C81820	CEM-SE4	298	C81890	CEM-SE4	300	C83538	CEM-SE4B	301
C81009	CEM-SE2	291	C81077	CEM-SE2	292	C81821	CEM-SE4	298	C81891	CEM-SE4	300	C83539	CEM-SE4B	301
C81010	CEM-SE2	291	C81078	CEM-SE2	292	C81822	CEM-SE4	298	C81892	CEM-SE4	300	C83540	CEM-SE4B	301
C81011	CEM-SE2	291	C81079	CEM-SE2	292	C81824	CEM-SE4	298	C81893	CEM-SE4	300	C83541	CEM-SE4B	302
C81012	CEM-SE2	291	C81080	CEM-SE2	292	C81825	CEM-SE4	298	C81894	CEM-SE4	300	C83542	CEM-SE4B	302
C81013	CEM-SE2	291	C81081	CEM-SE2	292	C81827	CEM-SE4	298	C81895	CEM-SE4	300	C83543	CEM-SE4B	302
C81014	CEM-SE2	291	C81082	CEM-SE2	292	C81828	CEM-SE4	298	C81896	CEM-SE4	300	C83544	CEM-SE4B	302
C81015	CEM-SE2	291	C81083	CEM-SE2	292	C81829	CEM-SE4	298	C81897	CEM-SE4	300	C83545	CEM-SE4B	302
C81016	CEM-SE2	291	C81657	CEM-SE3	295	C81830	CEM-SE4	298	C81898	CEM-SE4	300	C83546	CEM-SE4B	302
C81017	CEM-SE2	291	C81658	CEM-SE3	295	C81831	CEM-SE4	298	C81899	CEM-SE4	300	C83547	CEM-SE4B	302
C81018	CEM-SE2	291	C81659	CEM-SE3	295	C81832	CEM-SE4	298	C81900	CEM-SE4	300	C83548	CEM-SE4B	302
C81019	CEM-SE2	291	C81660	CEM-SE3	295	C81833	CEM-SE4	298	C81901	CEM-SE4	300	C83549	CEM-SE4B	302
C81020	CEM-SE2	291	C81661	CEM-SE3	295	C81834	CEM-SE4	298	C81902	CEM-SE4	300	C83550	CEM-SE4B	302
C81021	CEM-SE2	291	C81662	CEM-SE3	295	C81835	CEM-SE4	298	C81903	CEM-SE4	300	C83551	CEM-SE4B	302
C81022	CEM-SE2	291	C81663	CEM-SE3	295	C81836	CEM-SE4	298	C81904	CEM-SE4	300	C83552	CEM-SE4B	302
C81023	CEM-SE2	291	C81664	CEM-SE3	295	C81837	CEM-SE4	298	C81905	CEM-SE4	300	C83553	CEM-SE4B	302
C81024	CEM-SE2	291	C81665	CEM-SE3	295	C81838	CEM-SE4	298	C81906	CEM-SE4	300	C83554	CEM-SE4B	302
C81025	CEM-SE2	291	C81666	CEM-SE3	295	C81839	CEM-SE4	298	C81907	CEM-SE4	300	C83555	CEM-SE4B	302

Index by Part Number

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
C89519	1727	67	C89604	1727	68	C89674	1767	30	C91734	183	116	C95007	CTM	177
C89520	1727	67	C89605	1727	68	C89675	1767	30	C91735	183	116	C95008	CTM	177
C89521	1727	67	C89606	1727	68	C89676	1767	30	C91737	183	116	C95009	CTM	177
C89522	1727	67	C89607	1727	68	C89677	1767	30	C91749	183	116	C95010	CTM	177
C89523	1727	67	C89608	1727	68	C89678	1767	30	C91750	183	119	C95011	CTM	177
C89525	1727	67	C89609	1727	68	C89679	1767	30	C91770	183	119	C95012	CTM	177
C89527	1727	67	C89610	1727	68	C89680	1767	30	C91830	183	116	C95013	CTM	177
C89528	1727	67	C89612	1727	68	C89681	1767	30	C91832	183	116	C95014	CTM	177
C89529	1727	67	C89613	1727	68	C89682	1767	30	C91833	183	116	C95015	CTM	177
C89530	1727	67	C89614	1727	68	C89683	1767	30	C91834	183	116	C95016	CTM	177
C89532	1727	67	C89616	1767	31	C89684	1767	30	C91835	183	116	C95017	CTM	177
C89533	1727	67	C89617	1767	31	C89685	1767	31	C92704	183	116	C95018	CTM	177
C89534	1727	67	C89618	1767	31	C89686	1767	31	C92705	183	116	C95019	CTM	177
C89535	1727	67	C89619	1767	31	C89687	1767	31	C92706	183	116	C95020	CTM	177
C89536	1727	67	C89620	1767	31	C89688	1767	31	C92707	183	116	C95021	CTM	177
C89539	1727	67	C89621	1767	31	C89689	1767	31	C92708	183	116	C95022	CTM	177
C89540	1727	67	C89622	1767	31	C89690	1767	31	C92836	183	116	C95023	CTM	177
C89543	1727	67	C89623	1767	30	C89691	1767	31	C94560	3001	95	C95024	CTM	177
C89544	1727	67	C89624	1767	30	C89692	1767	31	C94561	3001	95	C95025	CTM	177
C89545	1727	67	C89625	1767	30	C89693	1767	31	C94562	3001	95	C95026	CTMC	177
C89546	1727	67	C89626	1767	30	C89694	1767	31	C94563	3001	95	C95027	CTMC	177
C89548	1727	67	C89627	1767	30	C89695	1767	31	C94564	3001	95	C95028	CTMC	177
C89549	1727	67	C89628	1767	30	C89696	1767	31	C94565	3001	95	C95029	CTMC	177
C89550	1727	67	C89629	1767	30	C89697	1767	31	C94566	3001	95	C95030	CTMC	177
C89551	1727	67	C89630	1767	30	C89698	1767	31	C94567	3001	95	C95031	CTMC	177
C89552	1727	67	C89631	1767	30	C89699	1767	31	C94568	3001	95	C95032	CTMC	177
C89554	1727	67	C89632	1767	30	C89700	1767	31	C94569	3001	95	C95033	CTMC	177
C89555	1727	67	C89633	1767	30	C89701	1767	31	C94570	3001	95	C95034	CTMC	177
C89556	1727	67	C89634	1767	30	C89702	1767	31	C94571	3001	95	C95035	CTMC	177
C89557	1727	67	C89635	1767	30	C89703	1767	31	C94572	3001	95	C95036	CTMC	177

Index by Part Number

Tap & Drill Recommendations

Machine Screw, Fractional, and Metric Sizes

Tap Size & Pitch		Cutting Taps		Forming Taps		Tap Size & Pitch		Cutting Taps		Forming Taps	
inch	metric	drill size	decimal inch	drill size	decimal inch	inch	metric	drill size	decimal inch	drill size	decimal inch
0-80		3/64	.0469	54	.0550		M12 x 1,75	10,2	.4016	11,2	.4409
	M1,6 x 0,35	1,25	.0492	1,45	.0571		M12 x 1,25	10,8	.4252	11,5	.4528
	M1,8 x 0,35	1,45	.0571	1,65	.0650	1/2-13		27/64	.4219	15/32	.4688
1-64		53	.0595	51	.0670	1/2-20		29/64	.4531	12,25	.4823
1-72		53	.0595	51	.0670		M14 x 2	12,0	.4724	33/64	.5156
	M2 x 0,4	1,6	.0630	1,8	.0709	9/16-12		31/64	.4844	17/32	.5312
2-56		50	.0700	5/64	.0781	9/16-18		33/64	.5156	13,5	.5315
2-64		50	.0700	47	.0785	5/8-11		17/32	.5312	14,75	.5807
	M2,2 x 0,45	1,75	.0689	2,0	.0787	5/8-18		37/64	.5781	15,25	.6004
	M2,5 x 0,45	2,05	.0807	2,3	.0906		M16 x 2	14,0	.5512	19/32	.5938
3-48		47	.0785	43	.0890		M16 x 1,5	14,5	.5709	15,25	.6004
3-56		46	.0810	2,3	.0906		M18 x 2,5	15,5	.6102	39/64	.6094
4-40		43	.0890	38	.1015		M18 x 1,5	16,5	.6496	17,25	.6791
4-48		42	.0935	2,6	.1024	3/4-10		21/32	.6562	45/64	.7031
	M3 x 0,5	2,5	.0984	7/64	.1094	3/4-16		11/16	.6875	23/32	.7188
5-40		38	.1015	33	.1130		M20 x 2,5	17,5	.6890		
5-44		37	.1040	2,9	.1142		M20 x 1,5	18,5	.7283		
	M3,5 x 0,6	2,9	.1142	3,2	.1260		M22 x 2,5	19,5	.7677		
6-32		36	.1065	1/8	.1250		M22 x 1,5	20,5	.8071		
6-40		33	.1130	3,25	.1280	7/8-9		49/64	.7656		
	M4 x 0,7	3,3	.1299	3,7	.1457	7/8-14		13/16	.8125		
8-32		29	.1360	25	.1495		M24 x 3	21,0	.8268		
8-36		29	.1360	24	.1520		M24 x 2	22,0	.8661		
	M4,5 x 0,75	3,7	.1457	4,1	.1614	1-8		7/8	.8750		
10-24		26	.1470	11/64	.1719	1-12		59/64	.9219		
10-32		21	.1590	16	.1770		M27 x 3	24,0	.9449		
	M5 x 0,8	4,2	.1654	14	.1820		M27 x 2	25,0	.9843		
12-24		16	.1770	8	.1990	1-1/8-7		63/64	.9844		
12-28		15	.1800	7	.2010	1-1/8-12		1-3/64	1.0469		
	M6 x 1	5,0	.1969	7/32	.2188		M30 x 3,5	26,5	1.0433		
1/4-20		7	.2010	1	.2280		M30 x 2	28,0	1.1024		
1/4-28		3	.2130	15/64	.2340	1-1/4-7		1-7/64	1.1094		
	M7 x 1	6,0	.2362	F	.2570	1-1/4-12		1-11/64	1.1719		
5/16-18		F	.2570	L	.2900		M33 x 3,5	29,5	1.1614		
5/16-24		I	.2720	M	.2950		M33 x 2	31,0	1.2205		
	M8 x 1,25	6,7	.2638	7,4	.2913	1-3/8-6		1-7/32	1.2188		
	M8 x 1	7,0	.2756	19/64	.2969	1-3/8-12		1-19/64	1.2969		
3/8-16		5/16	.3125	S	.3480		M36 x 4	32,0	1.2598		
3/8-24		Q	.3320	T	.3580		M36 x 3	33,0	1.2992		
	M10 x 1,5	8,5	.3346	U	.3680	1-1/2-6		1-11/32	1.3438		
	M10 x 1,25	8,7	.3425	9,4	.3701	1-1/2-12		1-27/64	1.4219		
7/16-14		U	.3680	Y	.4040		M39 x 4	35,0	1.3780		
7/16-20		25/64	.3906	Z	.4130		M39 x 3	36,0	1.4173		

**FORM
TAPS
NOT
AVAILABLE
IN
THESE
SIZES**

Pipe Taps — NPT, NPTF, NPSM, NPSC, NPSF Sizes

Nominal Tap Size & Pitch	NPT & NPTF		NPSM	NPSC	NPSF
	w/o reamer	w/ reamer			
1/16 - 27	C (.242)	A (.234)	—	1/4	D (.246)
1/8 - 27	Q (.332)	21/64	T (.358)	Q	R (.339)
1/4 - 18	7/16	27/64	15/32	7/16	7/16
3/8 - 18	9/16	9/16	.603*	37/64	37/64
1/2 - 14	45/64	11/16	19,0mm	23/32	.705*
3/4 - 14	29/32	57/64	61/64	59/64	59/64
1 - 1 1/2	1 9/64	1 1/8	1 13/64	1 5/32	1 5/32
1 1/4 - 1 1/2	1 31/64	1 15/32	1.546*	1 1/2	—
1 1/2 - 1 1/2	1 23/32	1 45/64	1 25/32	1 47/64	—
2 - 1 1/2	2 3/16	2 11/64	2 1/4	2 1/4	—

*special

Decimal Equivalents

DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES	DRILL SIZE	DECIMAL INCHES
0.30mm	.0118	1.40mm	.0551	3.20mm	.1260	7/32	.2188	8.60mm	.3386	37/64	.5781
0.32mm	.0126	1.45mm	.0571	30	.1285	5.60mm	.2205	R	.3390	14.75mm	.5807
80	.0135	1.50mm	.0591	3.30mm	.1299	2	.2210	8.70mm	.3425	15.00mm	.5906
0.35mm	.0138	53	.0595	3.40mm	.1339	5.70mm	.2244	11/32	.3438	19/32	.5938
79	.0145	1.55mm	.0610	29	.1360	1	.2280	8.80mm	.3465	15.25mm	.6004
0.38mm	.0150	1/16	.0625	3.50mm	.1378	5.80mm	.2283	S	.3480	39/64	.6094
1/64	.0156	1.60mm	.0630	28	.1405	5.90mm	.2323	8.90mm	.3504	15.50mm	.6102
0.40mm	.0157	52	.0635	9/64	.1406	A	.2340	9.00mm	.3543	15.75mm	.6201
78	.0160	1.65mm	.0650	3.60mm	.1417	15/64	.2344	T	.3580	5/8	.6250
0.42mm	.0165	1.70mm	.0669	27	.1440	6.00mm	.2362	9.10mm	.3583	16.00mm	.6299
0.45mm	.0177	51	.0670	3.70mm	.1457	B	.2380	23/64	.3594	16.25mm	.6398
77	.0180	1.75mm	.0689	26	.1470	6.10mm	.2402	9.20mm	.3622	41/64	.6406
0.48mm	.0189	50	.0700	25	.1495	C	.2420	9.30mm	.3661	16.50mm	.6496
0.50mm	.0197	1.80mm	.0709	3.80mm	.1496	6.20mm	.2441	U	.3680	21/32	.6562
76	.0200	1.85mm	.0728	24	.1520	D	.2460	9.40mm	.3701	16.75mm	.6594
75	.0210	49	.0730	3.90mm	.1535	6.30mm	.2480	9.50mm	.3740	17.00mm	.6693
0.55mm	.0217	1.90mm	.0748	23	.1540	1/4	.2500	3/8	.3750	43/64	.6719
74	.0225	48	.0760	5/32	.1562	E	.2500	V	.3770	17.25mm	.6791
0.60mm	.0236	1.95mm	.0768	22	.1570	6.40mm	.2520	9.60mm	.3780	11/16	.6875
73	.0240	5/64	.0781	4.00mm	.1575	6.50mm	.2559	9.70mm	.3819	17.50mm	.6890
0.62mm	.0244	47	.0785	21	.1590	F	.2570	9.80mm	.3858	45/64	.7031
72	.0250	2.00mm	.0787	20	.1610	6.60mm	.2598	W	.3860	18.00mm	.7087
0.65mm	.0256	2.05mm	.0807	4.10mm	.1614	G	.2610	9.90mm	.3898	23/32	.7188
71	.0260	46	.0810	4.20mm	.1654	6.70mm	.2638	25/64	.3906	18.50mm	.7283
0.70mm	.0276	45	.0820	19	.1660	17/64	.2656	1.00mm	.3937	47/64	.7344
70	.0280	2.10mm	.0827	4.30mm	.1693	H	.2660	X	.3970	19.00mm	.7480
69	.0292	2.15mm	.0846	18	.1695	6.80mm	.2677	1.20mm	.4016	3/4	.7500
0.75mm	.0295	44	.0860	11/64	.1719	6.90mm	.2717	Y	.4040	49/64	.7656
68	.0310	2.20mm	.0866	17	.1730	I	.2720	13/32	.4062	19.50mm	.7677
1/32	.0312	2.25mm	.0886	4.40mm	.1732	7.00mm	.2756	Z	.4130	25/32	.7812
0.80mm	.0315	43	.0890	16	.1770	J	.2770	10.50mm	.4134	20.00mm	.7874
67	.0320	2.30mm	.0906	4.50mm	.1772	7.10mm	.2795	27/64	.4219	51/64	.7969
66	.0330	2.35mm	.0925	15	.1800	K	.2810	10.80mm	.4252	20.50mm	.8071
0.85mm	.0335	42	.0935	4.60mm	.1811	9/32	.2812	11.00mm	.4331	13/16	.8125
65	.0350	3/32	.0938	14	.1820	7.20mm	.2835	7/16	.4375	21.00mm	.8268
0.90mm	.0354	2.40mm	.0945	4.70mm	.1850	7.30mm	.2874	11.20mm	.4409	53/64	.8281
64	.0360	41	.0960	13	.1850	L	.2900	11.50mm	.4528	27/32	.8438
63	.0370	2.45mm	.0965	3/16	.1875	7.40mm	.2913	29/64	.4531	21.50mm	.8465
0.95mm	.0374	40	.0980	12	.1890	M	.2950	11.80mm	.4646	55/64	.8594
62	.0380	2.50mm	.0984	4.8mm	.1890	7.50mm	.2953	15/32	.4688	22.00mm	.8661
61	.0390	39	.0995	11	.1910	19/64	.2969	12.00mm	.4724	7/8	.8750
1.00mm	.0394	38	.1015	4.90mm	.1929	7.60mm	.2992	12.20mm	.4803	22.50mm	.8858
60	.0400	2.60mm	.1024	10	.1935	N	.3020	31/64	.4844	57/64	.8906
59	.0410	37	.1040	9	.1960	7.70mm	.3031	12.50mm	.4921	23.00mm	.9055
1.05mm	.0413	2.70mm	.1063	5.00mm	.1969	7.80mm	.3071	1/2	.5000	29/32	.9062
58	.0420	36	.1065	8	.1990	7.90mm	.3110	12.80mm	.5039	59/64	.9219
57	.0430	7/64	.1094	5.10mm	.2008	5/16	.3125	13.00mm	.5118	23.50mm	.9252
1.10mm	.0433	35	.1100	7	.2010	8.00mm	.3150	33/64	.5156	15/16	.9375
1.15mm	.0453	2.80mm	.1102	13/64	.2031	O	.3160	13.20mm	.5197	24.00mm	.9449
56	.0465	34	.1110	6	.2040	8.10mm	.3189	17/32	.5312	61/64	.9531
3/64	.0469	33	.1130	5.20mm	.2047	8.20mm	.3228	13.50mm	.5315	24.50mm	.9646
1.20mm	.0472	2.90mm	.1142	5	.2055	P	.3230	13.80mm	.5433	31/32	.9688
1.25mm	.0492	32	.1160	5.30mm	.2087	8.30mm	.3268	35/64	.5469	25.00mm	.9843
1.30mm	.0512	3.00mm	.1181	4	.2090	21/64	.3281	14.00mm	.5512	63/64	.9844
55	.0520	31	.1200	5.40mm	.2126	8.40mm	.3307	14.25mm	.5610	1	1.0000
1.35mm	.0531	3.10mm	.1220	3	.2130	Q	.3320	9/16	.5625		
54	.0550	1/8	.1250	5.50mm	.2165	8.50mm	.3346	14.50mm	.5709		

FRACTIONAL - RED
WIRE GAGE - PURPLE
LETTER - BLUE
METRIC - GREEN

The
CLEVELAND
 TWIST DRILL CO.... Since 1874



TDC

2501 Davis Creek Road, Seneca, SC 29678 U.S.A.

USA

website www.gfii.com
 telephone 800.348.2885
 fax 800.892.4290
 email standard.distributors@gfii.com

International

telephone 864.653.3904
 email international.distributors@gfii.com

Canada

www.gfii.ca
 800.348.2885
 800.387.6649
canada.distributors@gfii.com

